



ARCHITECTURAL CONTOUR 8

Electric Heated Air Curtain

Data Sheet

Recommended for Mounting Heights to 8' (environmental separation) and 7' (insect control)

STANDARD CONSTRUCTION

- 8 1/4" high x 20" deep
- 1/5 hp motor(s) - ten speeds
- Factory installed Intelliswitch™ digital controller
- Clear satin anodized aluminum exterior
- Wall or Top Mounting
- High efficiency, low noise, articulating, three vane, Pro-V Nozzle
- Single stage electric heater (open element)
- Alternate kW: see sheet EP-262E
- Filter (washable)

OPTIONS

- 1/5 hp EC motor(s) - ten speeds
- Custom Color or Stainless
- Rear cover for top mounting to conceal fasteners
- Berner AIR™ (smart controller & app, includes BACnet)

Energy Codes ASHRAE 90.1-2019, IECC 2018, and ASHRAE 189.1
vestibule exception validated by AMCA certification.
Refer to Velocity Projection Chart below for information.



Berner International certifies that the air curtains shown here-in are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. Rated data shown is for base (electric heated) units. The AMCA Certified Ratings Seal applies to airflow rate, average outlet velocity, outlet velocity uniformity, velocity projection and power rating at free delivery only.

2 Year
Limited
Warranty



indoor use



MODEL	Nozzle Width (in)	Max Vel. at Nozzle (fpm)	Avg. Outlet Vel. (fpm)	Air Volume (cfm)	Outlet Vel. Uniformity	Power Rating (kW)	Motor(s) @ hp	Max Electric Capacity (kW)	Heater Output (MBH)	Air Temp. Rise (°F)	Net Wt. (lbs)
AC08-E-1036E	36.00	2,251	1,691	951	84%	0.20	1 @ 1/5	10.0	34.1	33°	48
AC08-E-1042E	42.00	2,317	1,728	1,134	83%	0.23	1 @ 1/5	10.0	34.1	28°	53
AC08-E-1048E	48.00	2,335	1,779	1,334	81%	0.26	1 @ 1/5	14.4	49.1	34°	58
AC08-E-1060E	59.00	2,189	1,808	1,667	81%	0.32	1 @ 1/5	14.4	49.1	27°	69
AC08-E-1072E	72.00	2,149	1,582	1,780	84%	0.32	1 @ 1/5	20.0	68.3	35°	84
AC08-E-2084E	84.00	2,317	1,728	2,268	83%	0.45	2 @ 1/5	20.0	68.3	28°	106
AC08-E-2096E	96.00	2,335	1,779	2,668	81%	0.52	2 @ 1/5	28.8	98.3	34°	116
AC08-E-2108E	108.00	2,335	1,778	3,001	81%	0.58	2 @ 1/5	28.8	98.3	30°	127
AC08-E-2120E	118.00	2,189	1,808	3,334	81%	0.64	2 @ 1/5	28.8	98.3	27°	138

600/3/60 power supply includes transformer housing, See drawing AC08-E-ELE-600

NOTES:

1. Operation of standard motor (AC) at 50Hz will generate a 17% reduction in performance; no reduction for optional EC motors.
2. Single Point Power Connection – consult factory.

MODEL NUMBER CONFIGURATION

AC08-E-1 036 E B-100-AC -WCA -SS

Series	Version	# of Motors	Opening Width	Heat	Voltage	Standard kW	Motor Type	Opt. Control	Opt. Cabinet Finish
AC08	E	1, 2	036" - 120"	E=Electric Heated	AC & EC motors B = 208/1/60* J = 240/1/60* V = 220/1/50* K = 120/480 L = 120/600 S = 208/480 M = 208/600 U = 240/480 N = 240/600 X = 208/3/60 Y = 240/3/60 O = 380/3/50** L-XI = 600/3/60 † EC motors only W = 277/1/60 WZ = 480/3/60**	10.0 - 28.8 (100 - 288) See sheet EP-262 for alternate kW code	AC= Standard Motor EC= Optional Motor	WCA= Berner AIR™ smart control	SS=Stainless Steel CC=Custom Color

for Standard offering, leave options (Opt.) blank

*B - Max 16.2 kW
*J and V - Max 16.2 kW or 20 kW based on # motors
*W - Max 20 kW
**Power Supply requires 4-wire system (w/ neutral)
† Add 5" for transformer housing
See sheet EP-262 for available lengths and voltages

VELOCITY PROJECTION: Model AC08-E-1036E			
Distance from Nozzle (in)	40	80	120
Core Velocity (fpm)	970	710	605
Uniformity (%)	91%	89%	92%

ASHRAE 90.1-2019 vestibule exception requires, "a jet velocity of not less than 6.6 feet per second (400 fpm; 2.0 m/s) at 6.0 in (15 cm) above the floor."

Sound level measured 10' (3m) from the unit in free field:

1 motor: Min./Max. Speed: 50/55 dBA

2 motors: Min./Max. Speed: 53/58 dBA

Sound data is not AMCA certified.

Berner reserves the right to alter specifications without prior notice.

www.berner.com Berner International 800.245.4455
111 Progress Ave. / New Castle / PA / 16101 / USA

DS-262E
September, 2023



ARCHITECTURAL CONTOUR 8 - AC MOTORS

Electric Heated Air Curtain

Electrical Performance Sheet

MODEL	kW (code)	Temp Rise °F	208/1/60 (voltage code B) MOTOR AMP DRAW = 1.7 each			240/1/60 (voltage code J) or 220/1/50 (voltage code V) MOTOR AMP DRAW = 1.7 each			* Consult Factory 277/1/60 (voltage code W) MOTOR AMP DRAW = ** each		
			# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT
AC08-E-1036E AC08-E-1042E	10 (100)	30	1	49.8	60	1	43.4	60	*	*	*
	7.5 (075)	23	1	37.8	50	1	33.0	45	*	*	*
	5.6 (056)	17	1	28.6	40	1	25.0	35	*	*	*
	4 (040)	12	1	20.9	30	1	18.4	25	*	*	*
AC08-E-1048E AC08-E-1060E	14.4 (144)	33	2	36.3/34.6	50/45	2	31.7/30.0	40/40	*	*	*
	10.8 (108)	25	2	27.7/26.0	35/35	1	46.7	60	*	*	*
	8.1 (081)	18	1	40.6	60	1	35.5	45	*	*	*
	5.6 (056)	13	1	28.6	40	1	25.0	35	*	*	*
AC08-E-1072E	20 (200)	30	-	N/A	N/A	2	43.4/41.7	60/60	*	*	*
	15 (150)	23	2	37.8/36.1	50/50	2	33.0/31.3	45/40	*	*	*
	11.2 (112)	17	2	28.6/26.9	40/35	1	48.4	60	*	*	*
	8 (080)	12	1	40.2	60	1	35.0	45	*	*	*
AC08-E-2084E	20 (200)	26	-	N/A	N/A	-	N/A	N/A	*	*	*
	15 (150)	19	2	39.5/36.1	50/50	2	34.7/31.3	45/40	*	*	*
	11.2 (112)	15	2	30.3/26.9	40/35	1	50.1	60	*	*	*
	8 (080)	10	1	41.9	60	1	36.7	50	*	*	*
AC08-E-2096E AC08-E-2108E AC08-E-2120E	28.8 (288)	33	-	N/A	N/A	-	N/A	N/A	*	*	*
	21.6 (216)	25	-	N/A	N/A	-	N/A	N/A	*	*	*
	16.2 (162)	19	2	42.3/38.9	60/50	2	37.2/33.8	50/45	*	*	*
	11.2 (112)	13	2	30.3/26.9	40/35	2	26.7/23.3	35/30	*	*	*



ARCHITECTURAL CONTOUR 8 - AC MOTORS

Electric Heated Air Curtain

Electrical Performance Sheet

MODEL	kW (code)	Temp Rise °F	208/3/60 (voltage code X) MOTOR AMP DRAW = 1.7 each			240/3/60 (voltage code Y) MOTOR AMP DRAW = 1.7 each			* Consult Factory 480/3/60 (voltage code WZ) - 4 Wire System MOTOR AMP DRAW = ** each @ 277V			600/3/60 (voltage code L-XI) XFMR 600/120 0.5kVA per MTR @ 0.8 each MOTOR AMP DRAW = 3.4 each @ 120V		
			# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT
AC08-E-1036E AC08-E-1042E	10 (100)	30	1	29.5	40	1	25.8	35	*	*	*	1	10.4	15
	7.5 (075)	23	1	22.5	30	1	19.7	25	*	*	*	1	8.0	15
	5.6 (056)	17	1	17.2	25	1	15.2	20	*	*	*	1	6.2	15
	4 (040)	12	1	12.8	20	1	11.3	15	*	*	*	1	4.6	15
AC08-E-1048E AC08-E-1060E	14.4 (144)	33	1	41.7	60	1	36.3	50	*	*	*	1	14.7	20
	10.8 (108)	25	1	31.7	40	1	27.7	35	*	*	*	1	11.2	15
	8.1 (081)	19	1	24.2	35	1	21.2	30	*	*	*	1	8.6	15
	5.6 (056)	13	1	17.2	25	1	15.2	20	*	*	*	1	6.2	15
AC08-E-1072E	20 (200)	30	2	29.5/27.8	40/35	2	25.8/24.1	35/35	*	*	*	1	20.0	30
	15 (150)	23	1	43.3	60	1	37.8	50	*	*	*	1	15.2	20
	11.2 (112)	17	1	32.8	45	1	28.6	40	*	*	*	1	11.6	15
	8 (080)	12	1	23.9	30	1	20.9	30	*	*	*	1	8.5	15
AC08-E-2084E	20 (200)	26	2	31.2/27.8	40/35	2	27.5/24.1	35/35	*	*	*	1	20.8	30
	15 (150)	20	1	45.0	60	1	39.5	50	*	*	*	1	16.0	20
	11.2 (112)	15	1	34.5	45	1	30.3	40	*	*	*	1	12.4	20
	8 (080)	10	1	25.6	35	1	22.6	30	*	*	*	1	9.3	15
AC08-E-2096E AC08-E-2108E AC08-E-2120E	28.8 (288)	33	2	43.4/40.0	60/50	2	38.0/34.6	50/45	*	*	*	1	29.3	40
	21.6 (216)	25	2	33.4/30.0	45/40	2	29.4/26.0	40/35	*	*	*	1	22.4	30
	16.2 (162)	19	1	48.4	60	1	42.4	60	*	*	*	1	17.2	25
	11.2 (112)	13	1	34.5	45	1	30.3	40	*	*	*	1	12.4	20



ARCHITECTURAL CONTOUR 8 - AC MOTORS

Electric Heated Air Curtain

Electrical Performance Sheet

			120/1/60 - 480/3/60 (voltage code K) 120V MOTOR AMP DRAW = 3.4 each				208/1/60 - 480/3/60 (voltage code S) 208V MOTOR AMP DRAW = 1.7 each				240/1/60 - 480/3/60 (voltage code U) 240V MOTOR AMP DRAW = 1.7 each				380/3/50 (voltage code O) MOTOR AMP DRAW = 1.7 each					
MODEL	kW (code)	Temp Rise °F	# CKTS	AMPS PER CIRCUIT (including motor)		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT (including motor)		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT (including motor)		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT
				120V/1	480V/3	120V/1	480V/3		208V/1	480V/3	208V/1	480V/3		240V/1	480V/3	240V/1	480V/3			
AC08-E-1036E AC08-E-1042E	10 (100)	30	2	3.4	12.0	15	15	2	1.7	12.0	15	15	2	1.7	12.0	15	15	1	16.9	25
	7.5 (075)	23	2	3.4	9.0	15	15	2	1.7	9.0	15	15	2	1.7	9.0	15	15	1	13.1	20
	5.6 (056)	17	2	3.4	6.7	15	15	2	1.7	6.7	15	15	2	1.7	6.7	15	15	1	10.2	15
	4 (040)	12	2	3.4	6.0	15	15	2	1.7	6.0	15	15	2	1.7	6.0	15	15	-	7.8	15
AC08-E-1048E AC08-E-1060E	14.4 (144)	33	2	3.4	17.3	15	25	2	1.7	17.3	15	25	2	1.7	17.3	15	25	1	23.6	30
	10.8 (108)	25	2	3.4	13.0	15	20	2	1.7	13.0	15	20	2	1.7	13.0	15	20	1	18.1	25
	8.1 (081)	19	2	3.4	9.7	15	15	2	1.7	9.7	15	15	2	1.7	9.7	15	15	1	14.0	20
	5.6 (056)	13	2	3.4	6.7	15	15	2	1.7	6.7	15	15	2	1.7	6.7	15	15	1	10.2	15
AC08-E-1072E	20 (200)	30	2	3.4	24.1	15	35	2	1.7	24.1	15	35	2	1.7	24.1	15	35	1	32.1	45
	15 (150)	23	2	3.4	18.0	15	25	2	1.7	18.0	15	25	2	1.7	18.0	15	25	1	24.5	35
	11.2 (112)	17	2	3.4	13.5	15	20	2	1.7	13.5	15	20	2	1.7	13.5	15	20	1	18.7	25
	8 (080)	12	2	3.4	9.6	15	15	2	1.7	9.6	15	15	2	1.7	9.6	15	15	1	13.9	20
AC08-E-2084E	20 (200)	26	2	6.8	24.1	15	35	2	3.4	24.1	15	35	2	3.4	24.1	15	35	1	33.8	45
	15 (150)	20	2	6.8	18.0	15	25	2	3.4	18.0	15	25	2	3.4	18.0	15	25	1	26.2	35
	11.2 (112)	15	-	6.8	13.5	15	20	-	3.4	13.5	15	20	-	3.4	13.5	15	20	1	20.4	30
	8 (080)	10	-	6.8	9.6	15	15	-	3.4	9.6	15	15	-	3.4	9.6	15	15	1	15.6	20
AC08-E-2096E AC08-E-2108E AC08-E-2120E	28.8 (288)	33	2	6.8	34.6	15	45	2	3.4	34.6	15	45	2	3.4	34.6	15	45	1	47.2	60
	21.6 (216)	25	2	6.8	26.0	15	35	2	3.4	26.0	15	35	2	3.4	26.0	15	35	1	36.2	45
	16.2 (162)	19	2	6.8	19.5	15	25	2	3.4	19.5	15	25	2	3.4	19.5	15	25	1	28.0	35
	11.2 (112)	13	2	6.8	13.5	15	20	2	3.4	13.5	15	20	2	3.4	13.5	15	20	1	20.4	30



ARCHITECTURAL CONTOUR 8 - AC MOTORS

Electric Heated Air Curtain

Electrical Performance Sheet

				120/1/60 - 600/3/60 (voltage code L) 120V MOTOR AMP DRAW = 3.4 each								208/1/60 - 600/3/60 (voltage code M) 208V MOTOR AMP DRAW = 1.7 each								240/1/60 - 600/3/60 (voltage code N) 240V MOTOR AMP DRAW = 1.7 each			
MODEL	kW (code)	Temp Rise °F	# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		
				120V/1	600V/3	120V/1	600V/3		208V/1	600V/3	208V/1	600V/3		240V/1	600V/3	240V/1	600V/3						
AC08-E-1036E AC08-E-1042E	10 (100)	30	2	3.4	9.6	15	15	2	1.7	9.6	15	15	2	1.7	9.6	15	15	2	1.7	9.6	15	15	
	7.5 (075)	23	2	3.4	7.2	15	15	2	1.7	7.2	15	15	2	1.7	7.2	15	15	2	1.7	7.2	15	15	
	5.6 (056)	17	2	3.4	5.4	15	15	2	1.7	5.4	15	15	2	1.7	5.4	15	15	2	1.7	5.4	15	15	
	4 (040)	12	2	3.4	3.8	15	15	2	1.7	3.8	15	15	2	1.7	3.8	15	15	2	1.7	3.8	15	15	
AC08-E-1048E AC08-E-1060E	14.4 (144)	33	2	3.4	13.9	15	20	2	1.7	13.9	15	20	2	1.7	13.9	15	20	2	1.7	13.9	15	20	
	10.8 (108)	25	2	3.4	10.4	15	15	2	1.7	10.4	15	15	2	1.7	10.4	15	15	2	1.7	10.4	15	15	
	8.1 (081)	19	2	3.4	7.8	15	15	2	1.7	7.8	15	15	2	1.7	7.8	15	15	2	1.7	7.8	15	15	
	5.6 (056)	13	2	3.4	5.4	15	15	2	1.7	5.4	15	15	2	1.7	5.4	15	15	2	1.7	5.4	15	15	
AC08-E-1072E	20 (200)	30	2	3.4	19.2	15	25	2	1.7	19.2	15	25	2	1.7	19.2	15	25	2	1.7	19.2	15	25	
	15 (150)	23	2	3.4	14.4	15	20	2	1.7	14.4	15	20	2	1.7	14.4	15	20	2	1.7	14.4	15	20	
	11.2 (112)	17	2	3.4	10.8	15	15	2	1.7	10.8	15	15	2	1.7	10.8	15	15	2	1.7	10.8	15	15	
	8 (080)	12	2	3.4	7.7	15	15	2	1.7	7.7	15	15	2	1.7	7.7	15	15	2	1.7	7.7	15	15	
AC08-E-2084E	20 (200)	26	2	6.8	19.2	15	25	2	3.4	19.2	15	25	2	3.4	19.2	15	25	2	3.4	19.2	15	25	
	15 (150)	20	2	6.8	14.4	15	20	2	3.4	14.4	15	20	2	3.4	14.4	15	20	2	3.4	14.4	15	20	
	11.2 (112)	15	2	6.8	10.8	15	15	2	3.4	10.8	15	15	2	3.4	10.8	15	15	2	3.4	10.8	15	15	
	8 (080)	10	2	6.8	7.7	15	15	2	3.4	7.7	15	15	2	3.4	7.7	15	15	2	3.4	7.7	15	15	
AC08-E-2096E AC08-E-2108E AC08-E-2120E	28.8 (288)	33	2	6.8	27.7	15	35	2	3.4	27.7	15	35	2	3.4	27.7	15	35	2	3.4	27.7	15	35	
	21.6 (216)	25	2	6.8	20.8	15	30	2	3.4	20.8	15	30	2	3.4	20.8	15	30	2	3.4	20.8	15	30	
	16.2 (162)	19	2	6.8	15.6	15	20	2	3.4	15.6	15	20	2	3.4	15.6	15	20	2	3.4	15.6	15	20	
	11.2 (112)	13	2	6.8	10.8	15	15	2	3.4	10.8	15	15	2	3.4	10.8	15	15	2	3.4	10.8	15	15	



ARCHITECTURAL CONTOUR 8 - EC MOTORS

Electric Heated Air Curtain Electrical Performance Sheet

MODEL	kW (code)	Temp Rise °F	# CKTS	208/1/60 (voltage code B) MOTOR AMP DRAW = 2.5 each		# CKTS	240/1/60 (voltage code J) or 220/1/50 (voltage code V) MOTOR AMP DRAW = 2.5 each		# CKTS	277/1/60 (voltage code W) MOTOR AMP DRAW = 2.2 each	
				AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT		AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT		AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT
AC08-E-1036E AC08-E-1042E	10 (100)	30	1	50.6	60	1	44.2	60	1	38.3	50
	7.5 (075)	23	1	38.6	50	1	33.8	45	1	29.3	40
	5.6 (056)	17	1	29.4	40	1	25.8	35	1	22.4	30
	4 (040)	12	1	21.7	30	1	19.2	25	1	16.6	25
AC08-E-1048E AC08-E-1060E	14.4 (144)	33	2	37.1/34.6	50/45	2	32.5/30.0	45/40	2	28.2/26.0	40/35
	10.8 (108)	25	2	28.5/26.0	40/35	1	47.5	60	1	41.2	60
	8.1 (081)	18	1	41.4	60	1	36.3	50	1	31.4	40
	5.6 (056)	13	1	29.4	40	1	25.8	35	1	22.4	30
AC08-E-1072E	20 (200)	30	-	N/A	N/A	2	44.2/41.7	60/60	2	38.3/36.1	50/50
	15 (150)	23	2	38.6/36.1	50/50	2	33.8/31.3	45/40	2	29.3/27.1	40/35
	11.2 (112)	17	2	29.4/26.9	40/35	1	49.2	60	1	42.6	60
	8 (080)	12	1	41.0	60	1	35.8	45	1	31.1	40
AC08-E-2084E	20 (200)	26	-	N/A	N/A	-	N/A	N/A	2	40.5/36.1	60/50
	15 (150)	19	2	41.1/36.1	60/50	2	36.3/31.3	45/40	2	31.5/27.1	40/35
	11.2 (112)	15	2	31.9/26.9	40/35	2	28.3/23.3	35/30	1	44.8	60
	8 (080)	10	1	43.5	60	1	38.3	50	1	33.3	45
AC08-E-2096E AC08-E-2108E AC08-E-2120E	28.8 (288)	33	-	N/A	N/A	-	N/A	N/A	-	N/A	N/A
	21.6 (216)	25	-	N/A	N/A	-	N/A	N/A	2	43.4/39.0	60/50
	16.2 (162)	19	2	43.9/38.9	60/50	2	38.8/33.8	50/45	2	33.6/29.2	45/40
	11.2 (112)	13	2	31.9/26.9	40/35	2	28.3/23.3	35/30	1	44.8	60

Page 1 of 4

Berner reserves the right to alter specifications without prior notice.

www.berner.com **Berner International** 800.245.4455
111 Progress Ave. / New Castle / PA / 16101 / USA

EP-262E-EC
January, 2024

©Copyright, 2024 Berner International



ARCHITECTURAL CONTOUR 8 - EC MOTORS

Electric Heated Air Curtain

Electrical Performance Sheet

			208/3/60 (voltage code X) MOTOR AMP DRAW = 2.5 each			240/3/60 (voltage code Y) MOTOR AMP DRAW = 2.5 each			480/3/60 (voltage code WZ) - 4 Wire System MOTOR AMP DRAW = 2.2 each @ 277V			600/3/60 (voltage code L-XI) XFMR 600/120 0.5kVA per MTR @ 0.8 each MOTOR AMP DRAW = 4.4 each @ 120V		
MODEL	kW (code)	Temp Rise °F	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT
AC08-E-1036E AC08-E-1042E	10 (100)	30	1	30.3	40	1	26.6	35	1	14.2	20	1	10.4	15
	7.5 (075)	23	1	23.3	30	1	20.5	30	1	11.2	15	1	8.0	15
	5.6 (056)	17	1	18.0	25	1	16.0	20	1	8.9	15	1	6.2	15
	4 (040)	12	1	13.6	20	1	12.1	20	1	7.0	15	1	4.6	15
AC08-E-1048E AC08-E-1060E	14.4 (144)	33	1	42.5	60	1	37.1	50	1	19.5	25	1	14.7	20
	10.8 (108)	25	1	32.5	45	1	28.5	40	1	15.2	20	1	11.2	15
	8.1 (081)	18	1	25.0	35	1	22.0	30	1	11.9	15	1	8.6	15
	5.6 (056)	13	1	18.0	25	1	16.0	20	1	8.9	15	1	6.2	15
AC08-E-1072E	20 (200)	30	2	30.3/27.8	40/35	2	26.6/24.1	35/35	1	26.3	35	1	20.0	30
	15 (150)	23	1	44.1	60	1	38.6	50	1	20.2	30	1	15.2	20
	11.2 (112)	17	1	33.6	45	1	29.4	40	1	15.7	20	1	11.6	15
	8 (080)	12	1	24.7	35	1	21.7	30	1	11.8	15	1	8.5	15
AC08-E-2084E	20 (200)	26	2	32.8/27.8	45/35	2	29.1/24.1	40/35	1	28.5	40	1	20.8	30
	15 (150)	19	1	46.6	60	1	41.1	60	1	22.4	30	1	16.0	20
	11.2 (112)	15	1	36.1	45	1	31.9	40	1	17.9	25	1	12.4	20
	8 (080)	10	1	27.2	35	1	24.2	30	1	14.0	20	1	9.3	15
AC08-E-2096E AC08-E-2108E AC08-E-2120E	28.8 (288)	33	2	45.0/40.0	60/50	2	39.6/34.6	50/45	1	39.0	50	1	29.3	40
	21.6 (216)	25	2	35.0/30.0	45/40	2	31.0/26.0	40/35	1	30.4	40	1	22.4	30
	16.2 (162)	19	1	50.0	60	1	44.0	60	1	29.3	30	1	17.2	25
	11.2 (112)	13	1	36.1	45	1	31.9	40	1	17.9	25	1	12.4	20



ARCHITECTURAL CONTOUR 8 - EC MOTORS

Electric Heated Air Curtain

Electrical Performance Sheet

			120/1/60 - 480/3/60 (voltage code K) 120V MOTOR AMP DRAW = 4.4 each										208/1/60 - 480/3/60 (voltage code S) 208V MOTOR AMP DRAW = 2.5 each										240/1/60 - 480/3/60 (voltage code U) 240V MOTOR AMP DRAW = 2.5 each										380/3/50 (voltage code O) 4 Wire System MOTOR AMP DRAW = 2.5 each		
MODEL	kW (code)	Temp Rise °F	# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT (including motor)		BREAKER RATING PER CIRCUIT									
				120V/1	480V/3	120V/1	480V/3		208V/1	480V/3	208V/1	480V/3		240V/1	480V/3	240V/1	480V/3		240V/1	480V/3															
AC08-E-1036E AC08-E-1042E	10 (100)	30	2	4.4	12.0	15	15	2	2.5	12.0	15	15	2	2.5	12.0	15	15	1	17.7			25													
	7.5 (075)	23	2	4.4	9.0	15	15	2	2.5	9.0	15	15	2	2.5	9.0	15	15	1	13.9			20													
	5.6 (056)	17	2	4.4	6.7	15	15	2	2.5	6.7	15	15	2	2.5	6.7	15	15	1	11.0			15													
	4 (040)	12	2	4.4	4.8	15	15	2	2.5	4.8	15	15	2	2.5	4.8	15	15	1	8.6			15													
AC08-E-1048E AC08-E-1060E	14.4 (144)	33	2	4.4	17.3	15	25	2	2.5	17.3	15	25	2	2.5	17.3	15	25	1	24.4			35													
	10.8 (108)	25	2	4.4	13.0	15	20	2	2.5	13.0	15	20	2	2.5	13.0	15	20	1	18.9			25													
	8.1 (081)	19	2	4.4	9.7	15	15	2	2.5	9.7	15	15	2	2.5	9.7	15	15	1	14.8			20													
	5.6 (056)	13	2	4.4	6.7	15	15	2	2.5	6.7	15	15	2	2.5	6.7	15	15	1	11.0			15													
AC08-E-1072E	20 (200)	30	2	4.4	24.1	15	35	2	2.5	24.1	15	35	2	2.5	24.1	15	35	1	32.9			45													
	15 (150)	23	2	4.4	18.0	15	25	2	2.5	18.0	15	25	2	2.5	18.0	15	25	1	25.3			35													
	11.2 (112)	17	2	4.4	13.5	15	20	2	2.5	13.5	15	20	2	2.5	13.5	15	20	1	19.5			25													
	8 (080)	12	2	4.4	9.6	15	15	2	2.5	9.6	15	15	2	2.5	9.6	15	15	1	14.7			20													
AC08-E-2084E	20 (200)	26	2	8.8	24.1	15	35	2	5.0	24.1	15	35	2	5.0	24.1	15	35	1	35.4			45													
	15 (150)	20	2	8.8	18.0	15	25	2	5.0	18.0	15	25	2	5.0	18.0	15	25	1	27.8			35													
	11.2 (112)	15	2	8.8	13.5	15	20	2	5.0	13.5	15	20	2	5.0	13.5	15	20	1	22.0			30													
	8 (080)	10	2	8.8	9.6	15	15	2	5.0	9.6	15	15	2	5.0	9.6	15	15	1	17.2			25													
AC08-E-2096E AC08-E-2108E AC08-E-2120E	28.8 (288)	33	2	8.8	34.6	15	45	2	5.0	34.6	15	45	2	5.0	34.6	15	45	1	48.8			60													
	21.6 (216)	25	2	8.8	26.0	15	35	2	5.0	26.0	15	35	2	5.0	26.0	15	35	1	37.8			50													
	16.2 (162)	19	2	8.8	19.5	15	25	2	5.0	19.5	15	25	2	5.0	19.5	15	25	1	29.6			40													
	11.2 (112)	13	2	8.8	13.5	15	20	2	5.0	13.5	15	20	2	5.0	13.5	15	20	1	22.0			30													

Page 3 of 4

Berner reserves the right to alter specifications without prior notice.

www.berner.com **Berner International** 800.245.4455
111 Progress Ave. / New Castle / PA / 16101 / USA

EP-262E-EC
January, 2024

©Copyright, 2024 Berner International



ARCHITECTURAL CONTOUR 8 - EC MOTORS

Electric Heated Air Curtain

Electrical Performance Sheet

			120/1/60 - 600/3/60 (voltage code L) 120V MOTOR AMP DRAW = 4.4 each								208/1/60 - 600/3/60 (voltage code M) 208V MOTOR AMP DRAW = 2.5 each							240/1/60 - 600/3/60 (voltage code N) 240V MOTOR AMP DRAW = 2.5 each			
MODEL	kW (code)	Temp Rise °F	# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT					
				120V/1	600V/3	120V/1	600V/3		208V/1	600V/3	208V/1	600V/3		240V/1	600V/3	240V/1	600V/3				
AC08-E-1036E AC08-E-1042E	10 (100)	30	2	4.4	9.6	15	15	2	2.5	9.6	15	15	2	2.5	9.6	15	15				
	7.5 (075)	23	2	4.4	7.2	15	15	2	2.5	7.2	15	15	2	2.5	7.2	15	15				
	5.6 (056)	17	2	4.4	5.4	15	15	2	2.5	5.4	15	15	2	2.5	5.4	15	15				
	4 (040)	12	2	4.4	3.8	15	15	2	2.5	3.8	15	15	2	2.5	3.8	15	15				
AC08-E-1048E AC08-E-1060E	14.4 (144)	33	2	4.4	13.9	15	20	2	2.5	13.9	15	20	2	2.5	13.9	15	20				
	10.8 (108)	25	2	4.4	10.4	15	15	2	2.5	10.4	15	15	2	2.5	10.4	15	15				
	8.1 (081)	19	2	4.4	7.8	15	15	2	2.5	7.8	15	15	2	2.5	7.8	15	15				
	5.6 (056)	13	2	4.4	5.4	15	15	2	2.5	5.4	15	15	2	2.5	5.4	15	15				
AC08-E-1072E	20 (200)	30	2	4.4	19.2	15	25	2	2.5	19.2	15	25	2	2.5	19.2	15	25				
	15 (150)	23	2	4.4	14.4	15	20	2	2.5	14.4	15	20	2	2.5	14.4	15	20				
	11.2 (112)	17	2	4.4	10.8	15	15	2	2.5	10.8	15	15	2	2.5	10.8	15	15				
	8 (080)	12	2	4.4	7.7	15	15	2	2.5	7.7	15	15	2	2.5	7.7	15	15				
AC08-E-2084E	20 (200)	26	2	8.8	19.2	15	25	2	5.0	19.2	15	25	2	5.0	19.2	15	25				
	15 (150)	20	2	8.8	14.4	15	20	2	5.0	14.4	15	20	2	5.0	14.4	15	20				
	11.2 (112)	15	2	8.8	10.8	15	15	2	5.0	10.8	15	15	2	5.0	10.8	15	15				
	8 (080)	10	2	8.8	7.7	15	15	2	5.0	7.7	15	15	2	5.0	7.7	15	15				
AC08-E-2096E AC08-E-2108E AC08-E-2120E	28.8 (288)	33	2	8.8	27.7	15	35	2	5.0	27.7	15	35	2	5.0	27.7	15	35				
	21.6 (216)	25	2	8.8	20.8	15	30	2	5.0	20.8	15	30	2	5.0	20.8	15	30				
	16.2 (162)	19	2	8.8	15.6	15	20	2	5.0	15.6	15	20	2	5.0	15.6	15	20				
	11.2 (112)	13	2	8.8	10.8	15	15	2	5.0	10.8	15	15	2	5.0	10.8	15	15				

Page 4 of 4




Berner reserves the right to alter specifications without prior notice.

www.berner.com **Berner International** 800.245.4455
111 Progress Ave. / New Castle / PA / 16101 / USA



EP-262E-EC
January, 2024

©Copyright, 2024 Berner International

AC08-E ELECTRIC HEATED SYSTEM: 208 - 480V

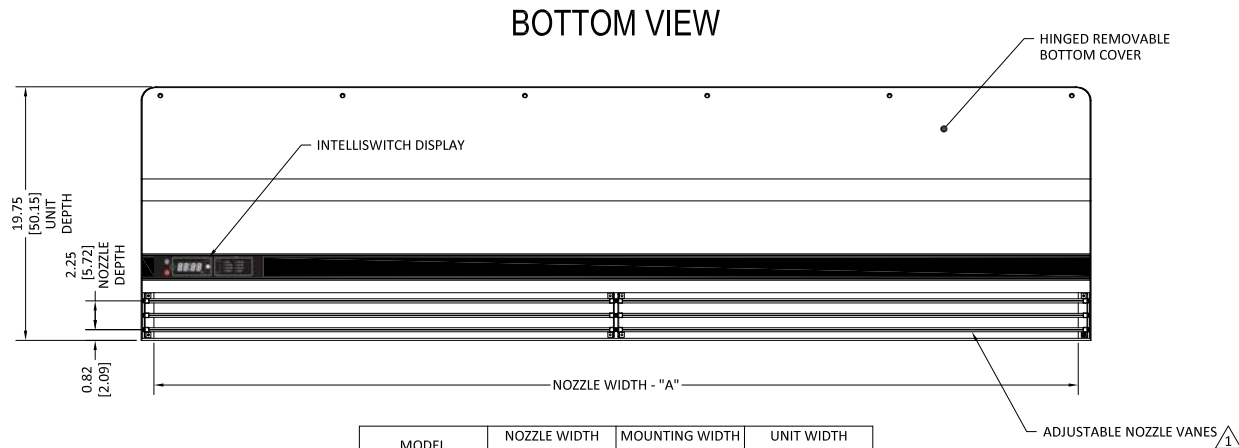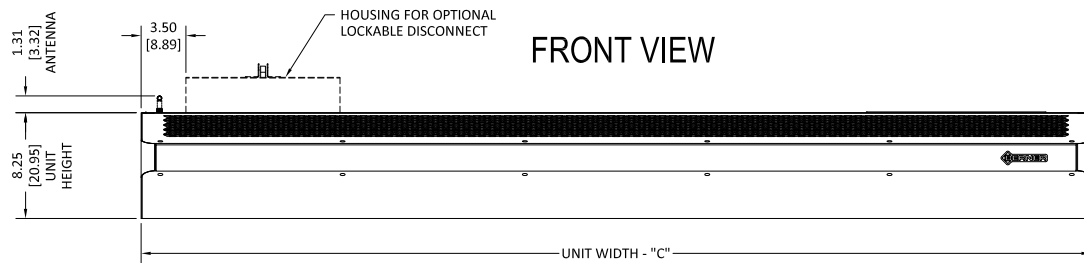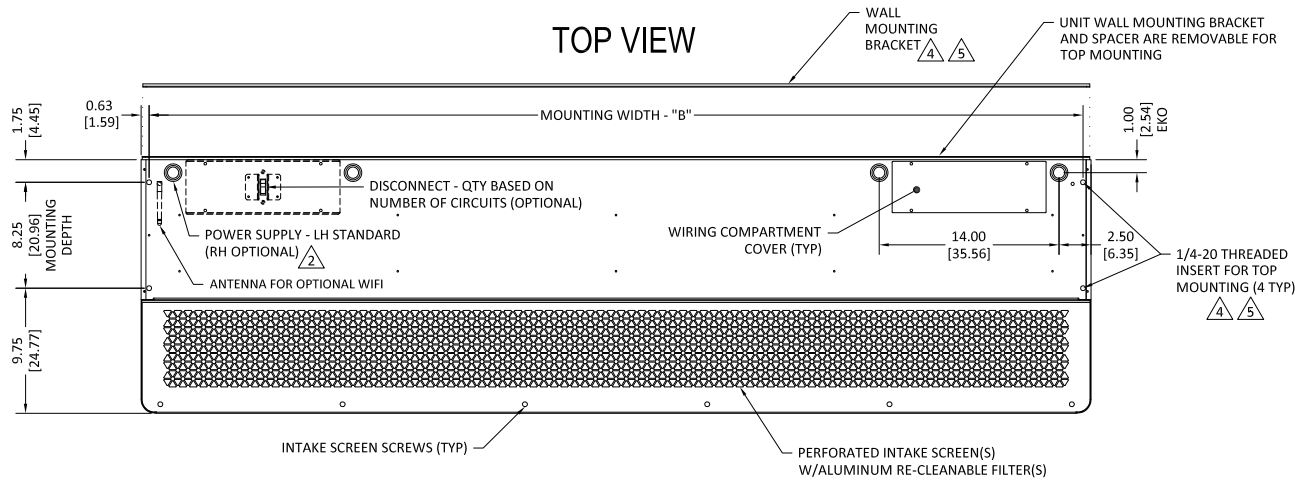

MODEL	NOZZLE WIDTH "A"	MOUNTING WIDTH "B"	UNIT WIDTH "C"
AC08-E-1036E	36.00 [91.44]	36.75 [93.35]	38.00 [96.52]
AC08-E-1042E	42.00 [106.68]	42.75 [108.59]	44.00 [111.76]
AC08-E-1048E	48.00 [121.92]	48.75 [123.83]	50.00 [127.00]
AC08-E-1060E	59.00 [149.86]	59.75 [151.76]	61.00 [154.94]
AC08-E-1072E	72.00 [182.88]	72.75 [184.79]	74.00 [187.96]
AC08-E-2084E	84.00 [213.36]	84.75 [215.27]	86.00 [218.44]
AC08-E-2096E	96.00 [243.84]	96.75 [245.75]	98.00 [248.92]
AC08-E-2108E	108.00 [274.32]	108.75 [276.23]	110.00 [279.40]
AC08-E-2120E	118.00 [299.72]	118.75 [301.63]	120.00 [304.80]

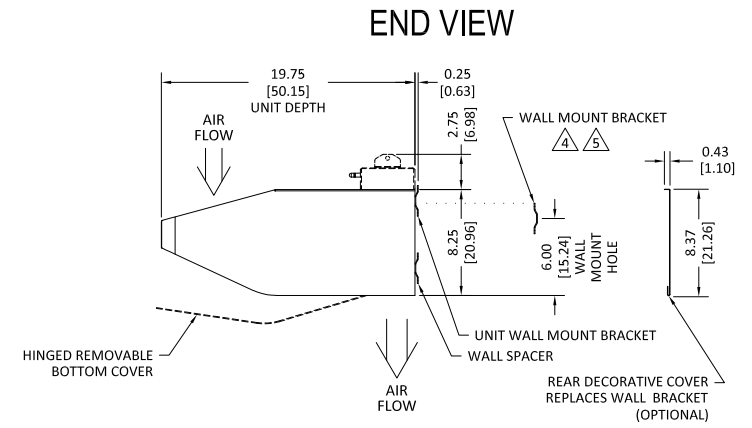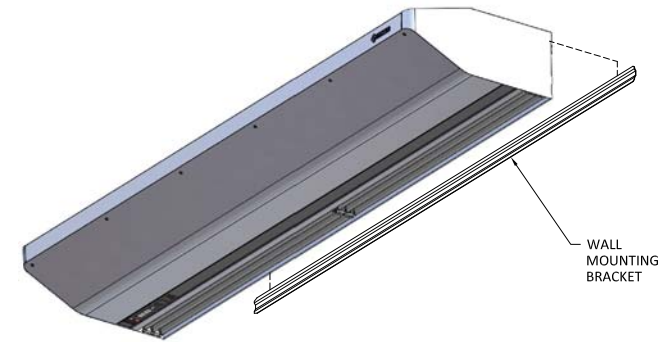





NOTES:

- 1 AIR CURTAIN MUST BE INSTALLED SO AIR STREAM IS NOT OBSTRUCTED WHEN DEFLECTED 20° TO EITHER SIDE OF C.
- 2 ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- 3 FIELD VERIFY DIMENSIONS.
- 4 ANCHORS TO SUPPORTING STRUCTURE BY OTHERS.
- 5 ADEQUACY OF SUPPORTING STRUCTURE IS TO BE VERIFIED BY A PROFESSIONAL STRUCTURAL ENGINEER.
- 6 THE LAST CHARACTER IN THE MODEL NUMBER - "E" DESIGNATES ELECTRIC HEATED UNIT.
- 7 DIMENSIONS IN INCHES [CENTIMETERS].


SHEET 1 OF 1

PROJECT	REV A	
LOCATION		
ARCHITECT		
ENGINEER		
DWG. NO.	AC08-E-ELE-208	TITLE: BERNER
DATE	28FEB2023	MODEL AC08-E AIR CURTAIN 208 - 480V
BY	D. Johnson	ELECTRIC HEATED SYSTEM
REPLACES	22FEB2022	BERNER INTERNATIONAL CORP. NEW CASTLE, PA.
BY	S. Beil	

AC08-E ELECTRIC HEATED SYSTEM: 600V

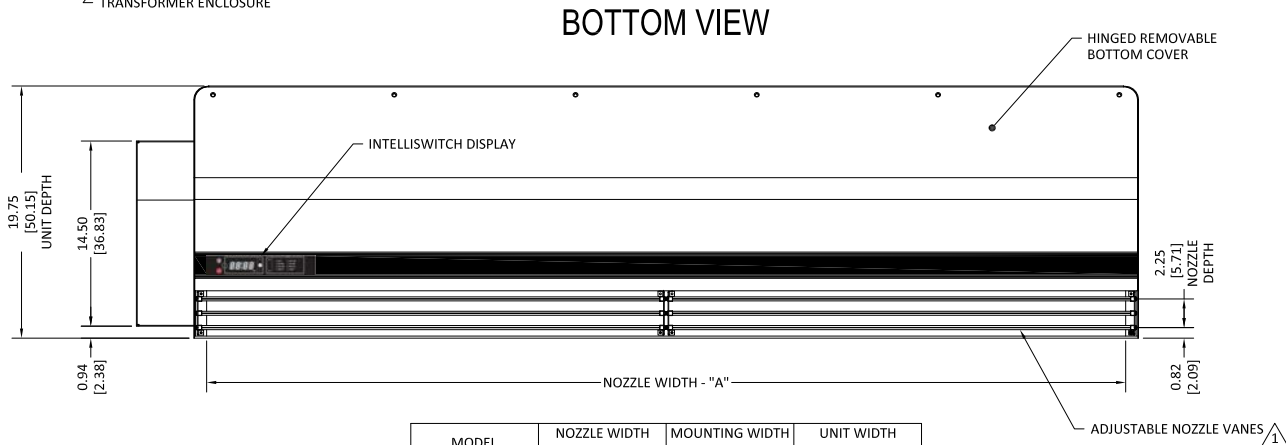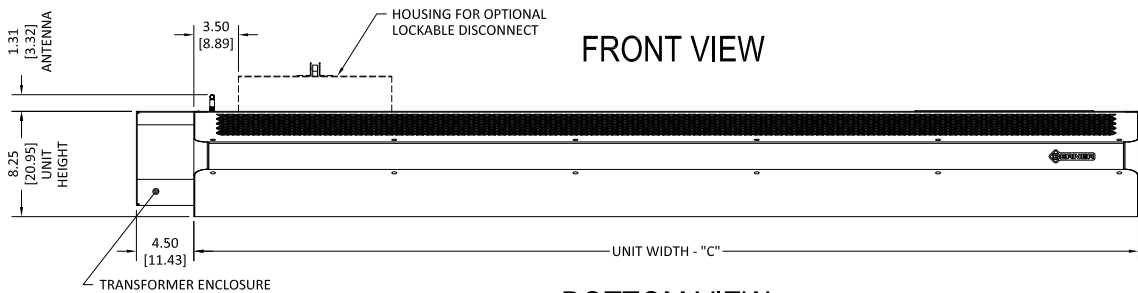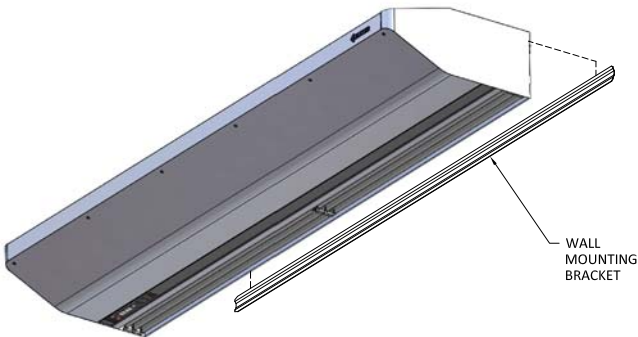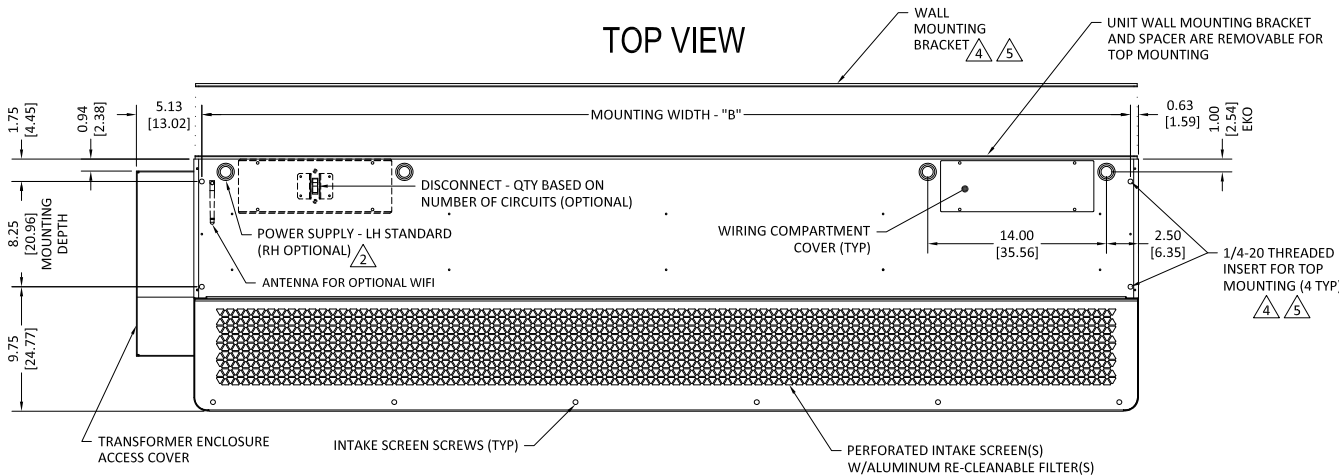

END VIEW

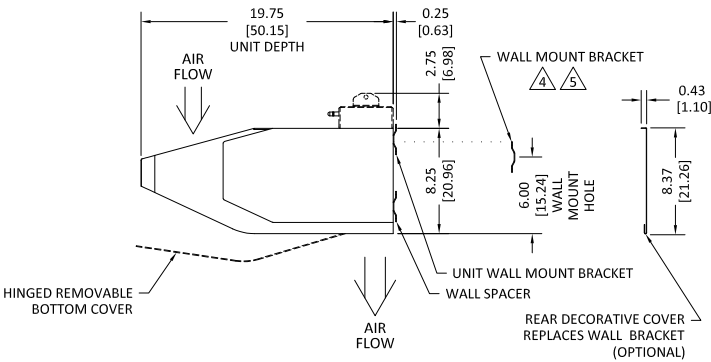

NOTES:

- 1 AIR CURTAIN MUST BE INSTALLED SO AIR STREAM IS NOT OBSTRUCTED WHEN DEFLECTED 20° TO EITHER SIDE OF $\bar{C}$.
- 2 ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- 3 FIELD VERIFY DIMENSIONS.
- 4 ANCHORS TO SUPPORTING STRUCTURE BY OTHERS.
- 5 ADEQUACY OF SUPPORTING STRUCTURE IS TO BE VERIFIED BY A PROFESSIONAL STRUCTURAL ENGINEER.
- 6 THE LAST CHARACTER IN THE MODEL NUMBER - "E" DESIGNATES ELECTRIC HEATED UNIT.
- 7 DIMENSIONS IN INCHES [CENTIMETERS].

SHEET 1 OF 1

MODEL	NOZZLE WIDTH "A"	MOUNTING WIDTH "B"	UNIT WIDTH "C"
AC08-E-1036E	36.00 [91.44]	36.75 [93.35]	38.00 [96.52]
AC08-E-1042E	42.00 [106.68]	42.75 [108.59]	44.00 [111.76]
AC08-E-1048E	48.00 [121.92]	48.75 [123.83]	50.00 [127.00]
AC08-E-1060E	59.00 [149.86]	59.75 [151.76]	61.00 [154.94]
AC08-E-1072E	72.00 [182.88]	72.75 [184.79]	74.00 [187.96]
AC08-E-2084E	84.00 [213.36]	84.75 [215.27]	86.00 [218.44]
AC08-E-2096E	96.00 [243.84]	96.75 [245.75]	98.00 [248.92]
AC08-E-2108E	108.00 [274.32]	108.75 [276.23]	110.00 [279.40]
AC08-E-2120E	118.00 [299.72]	118.75 [301.63]	120.00 [304.80]

PROJECT		REV	A
LOCATION			
ARCHITECT			
ENGINEER			
DWG. NO.	AC08-E-ELE-600	TITLE:	BERNER
DATE	28FEB2023		MODEL AC08-E AIR CURTAIN 600V ELECTRIC HEATED SYSTEM
BY	D. Johnson		
REPLACES	22FEB2022		
BY	S. Beil		BERNER INTERNATIONAL CORP. NEW CASTLE, PA.