

Recommended for Mounting Heights to 8' (environmental separation)

STANDARD CONSTRUCTION

- 11" high x 23" deep
- 1/5 hp EC motor(s)
- Intelliswitch™ digital controller, includes Berner AIR™ BMS (smart control and BACnet & Modbus)
- Cabinet: Brushed stainless steel, grade 304 (Optional: Anodized aluminum or Custom Color)
- Bottom Panel: Clear satin anodized aluminum (Optional: Custom Color or Stainless Steel)
- Wall or Top Mounting
- High efficiency, low noise, articulating Pro-V Nozzle
- Single stage electric heater (open element)
- Alternate kW: see sheet EP-222E
- Filter (washable)

Energy Codes ASHRAE 90.1-2019, IECC 2018, and ASHRAE 189.1 vestibule exception validated by AMCA certification.
Refer to Velocity Projection Chart below for information.



Berner International certifies that the air curtains shown here-in are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. Rated data shown is for base (electric heated) units. The AMCA Certified Ratings Seal applies to airflow rate, average outlet velocity, outlet velocity uniformity, velocity projection and power rating at free delivery only.

**2 Year
Limited
Warranty**



indoor use



Options

- Rear cover for top mounting to conceal fasteners

MODEL	Nozzle Width (in)	Max Vel. at Nozzle (fpm)	Avg. Outlet Vel. (fpm)	Air Volume (cfm)	Outlet Vel. Uniformity	Power Rating (kW)	Motor(s) @ hp	Max Electric Capacity (kW)	Heater Output (MBH)	Air Temp. Rise (°F)	Net Wt. (lbs)
AE08-F-1036E	36.00	2,251	1,691	951	84%	0.20	1 @ 1/5	10.0	34.1	33°	57
AE08-F-1042E	42.00	2,317	1,728	1,134	83%	0.23	1 @ 1/5	10.0	34.1	28°	64
AE08-F-1048E	48.00	2,335	1,779	1,334	81%	0.26	1 @ 1/5	14.4	49.1	34°	71
AE08-F-1060E	59.00	2,189	1,808	1,667	81%	0.32	1 @ 1/5	14.4	49.1	27°	86
AE08-F-1072E	72.00	2,149	1,582	1,780	84%	0.32	1 @ 1/5	20.0	68.3	35°	100
AE08-F-2078E	78.00	2,317	1,711	2,085	83%	0.42	2 @ 1/5	20.0	68.3	30°	127
AE08-F-2084E	84.00	2,317	1,728	2,268	83%	0.45	2 @ 1/5	20.0	68.3	28°	127
AE08-F-2096E	96.00	2,335	1,779	2,668	81%	0.52	2 @ 1/5	28.8	98.3	34°	142
AE08-F-2108E	108.00	2,335	1,778	3,001	81%	0.58	2 @ 1/5	28.8	98.3	30°	156
AE08-F-2120E	118.00	2,189	1,808	3,334	81%	0.64	2 @ 1/5	28.8	98.3	27°	167

See sheet EP-222E for amp draws/total load requirements and alternate kW.
600/3/60 power supply includes extended cabinet. See drawing AE08-F-ELE-TR.
NOTE: Single Point Power Connection – consult factory.

MODEL NUMBER CONFIGURATION

AE08-F-1 036 E B-100-EC-CM -D-R-SA

Series	Version	# of Motors	Opening Width	Heat	Voltage	kW	Motor Type	Berner AIR	Opt. Interconnect	Opt. Display	Material / Finish	
AE08	F	1, 2	036" - 120"	E=Electric Heated	B=208/1/60" J=240/1/60" V=220/1/50" W=277/1/60" K=120/480 L=120/600 S=208/480 M=208/600 U=240/480 N=240/600 X=208/3/60 Y=240/3/60 WZ = 480/3/60** L-XI = 600/3/60 † O = 380/3/50**	10.0 - 28.8 (100 - 288)	EC Motor	CM=BMS	D=Physical Data Link (daisy chain)	R=Remote Display TB=Tablet	Cabinet	Bottom Panel
					See sheet EP-222E for alternate kW code							

*B - Max 16.2 kW
*J and V - Max 16.2 kW or 20 kW based on # motors
*W - Max 21.6 kW
**Power Supply requires 4-wire system (w/ neutral)
† Add 5" to cabinet width for transformer
See sheet EP-222 for available lengths and voltages

for Standard offering, leave options (Opt.) blank

VELOCITY PROJECTION: Model AE08-F-1036E			
Distance from Nozzle (in)	40	80	120
Core Velocity (fpm)	970	710	605
Uniformity (%)	91%	89%	92%

Sound level measured 10' (3m) from the unit in free field:

1 motor: Min./Max. Speed: 50/53 dBA
2 motors: Min./Max. Speed: 53/56 dBA

Sound data is not AMCA certified.

ASHRAE 90.1-2019 vestibule exception requires, "a jet velocity of not less than 6.6 feet per second (2.0 m/s; 400 fpm) at 6.0 in (15 cm) above the floor."

Berner reserves the right to alter specifications without prior notice.



ARCHITECTURAL ELITE 8

Electric Air Curtain

Electrical Performance Sheet

MODEL	kW (code)	Temp Rise °F	# CKTS	208/1/60 (voltage code B) EC MOTOR AMP DRAW = 2.5 each		# CKTS	240/1/60 (voltage code J) or 220/1/50 (voltage code V) EC MOTOR AMP DRAW = 2.5 each		# CKTS	277/1/60 (voltage code W) EC MOTOR AMP DRAW = 2.2 each	
				AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT		AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT		AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT
AE08-F-1036E AE08-F-1042E	10 (100)	30	1	50.6	60	1	44.2	60	1	38.3	50
	7.5 (075)	23	1	38.6	50	1	33.8	45	1	29.3	40
	5.6 (056)	17	1	29.4	40	1	25.8	35	1	22.4	30
	4 (040)	12	1	21.7	30	1	19.2	25	1	16.6	25
AE08-F-1048E AE08-F-1060E	14.4 (144)	33	2	37.1/34.6	50/45	2	32.5/30.0	45/40	2	28.2/26.0	40/35
	10.8 (108)	25	2	28.5/26.0	40/35	1	47.5	60	1	41.2	60
	8.1 (081)	18	1	41.4	60	1	36.3	50	1	31.4	40
	5.6 (056)	13	1	29.4	40	1	25.8	35	1	22.4	30
AE08-F-1072E	20 (200)	30	-	N/A	N/A	2	44.2/41.7	60/60	2	38.3/36.1	50/50
	15 (150)	23	2	38.6/36.1	50/50	2	33.8/31.3	45/40	2	29.3/27.1	40/35
	11.2 (112)	17	2	29.4/26.9	40/35	1	49.2	60	1	42.6	60
	8 (080)	12	1	41.0	60	1	35.8	45	1	31.1	40
AE08-F-2078E AE08-F-2084E	20 (200)	26	-	N/A	N/A	-	N/A	N/A	2	40.5/36.1	60/50
	15 (150)	19	2	41.1/36.1	60/50	2	36.3/31.3	45/40	2	31.5/27.1	40/35
	11.2 (112)	15	2	31.9/26.9	40/35	2	28.3/23.3	35/30	1	44.8	60
	8 (080)	10	1	43.5	60	1	38.3	50	1	33.3	45
AE08-F-2096E AE08-F-2108E AE08-F-2120E	28.8 (288)	33	-	N/A	N/A	-	N/A	N/A	-	N/A	N/A
	21.6 (216)	25	-	N/A	N/A	-	N/A	N/A	2	43.4/39.0	60/50
	16.2 (162)	19	2	43.9/38.9	60/50	2	38.8/33.8	50/45	2	33.6/29.2	45/40
	11.2 (112)	13	2	31.9/26.9	40/35	2	28.3/23.3	35/30	1	44.8	60

Page 1 of 4

Berner reserves the right to alter specifications without prior notice.

www.berner.com **Berner International** 800.245.4455
111 Progress Ave. / New Castle / PA / 16101 / USA

EP-222E
December, 2024

©Copyright, 2024 Berner International



ARCHITECTURAL ELITE 8

Electric Air Curtain

Electrical Performance Sheet

			208/3/60 (voltage code X) EC MOTOR AMP DRAW = 2.5 each			240/3/60 (voltage code Y) EC MOTOR AMP DRAW = 2.5 each			480/3/60 (voltage code WZ) - 4 Wire System EC MOTOR AMP DRAW = 2.2 each @ 277V			600/3/60 (voltage code L-XI) XFMR 600/120 0.5kVA per MTR @ 0.8 each EC MOTOR AMP DRAW = 4.4 each @ 120V		
MODEL	kW (code)	Temp Rise °F	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT
AE08-F-1036E AE08-F-1042E	10 (100)	30	1	30.3	40	1	26.6	35	1	14.2	20	1	10.4	15
	7.5 (075)	23	1	23.3	30	1	20.5	30	1	11.2	15	1	8.0	15
	5.6 (056)	17	1	18.0	25	1	16.0	20	1	8.9	15	1	6.2	15
	4 (040)	12	1	13.6	20	1	12.1	20	1	7.0	15	1	4.6	15
AE08-F-1048E AE08-F-1060E	14.4 (144)	33	1	42.5	60	1	37.1	50	1	19.5	25	1	14.7	20
	10.8 (108)	25	1	32.5	45	1	28.5	40	1	15.2	20	1	11.2	15
	8.1 (081)	18	1	25.0	35	1	22.0	30	1	11.9	15	1	8.6	15
	5.6 (056)	13	1	18.0	25	1	16.0	20	1	8.9	15	1	6.2	15
AE08-F-1072E	20 (200)	30	2	30.3/27.8	40/35	2	26.6/24.1	35/35	1	26.3	35	1	20.0	30
	15 (150)	23	1	44.1	60	1	38.6	50	1	20.2	30	1	15.2	20
	11.2 (112)	17	1	33.6	45	1	29.4	40	1	15.7	20	1	11.6	15
	8 (080)	12	1	24.7	35	1	21.7	30	1	11.8	15	1	8.5	15
AE08-F-2078E AE08-F-2084E	20 (200)	26	2	32.8/27.8	45/35	2	29.1/24.1	40/35	1	28.5	40	1	20.8	30
	15 (150)	19	1	46.6	60	1	41.1	60	1	22.4	30	1	16.0	20
	11.2 (112)	15	1	36.1	45	1	31.9	40	1	17.9	25	1	12.4	20
	8 (080)	10	1	27.2	35	1	24.2	30	1	14.0	20	1	9.3	15
AE08-F-2096E AE08-F-2108E AE08-F-2120E	28.8 (288)	33	2	45.0/40.0	60/50	2	39.6/34.6	50/45	1	39.0	50	1	29.3	40
	21.6 (216)	25	2	35.0/30.0	45/40	2	31.0/26.0	40/35	1	30.4	40	1	22.4	30
	16.2 (162)	19	1	50.0	60	1	44.0	60	1	29.3	30	1	17.2	25
	11.2 (112)	13	1	36.1	45	1	31.9	40	1	17.9	25	1	12.4	20



ARCHITECTURAL ELITE 8






Electric Air Curtain

Electrical Performance Sheet

			120/1/60 - 480/3/60 (voltage code K) 120V EC MOTOR AMP DRAW = 4.4 each								208/1/60 - 480/3/60 (voltage code S) 208V EC MOTOR AMP DRAW = 2.5 each								240/1/60 - 480/3/60 (voltage code U) 240V EC MOTOR AMP DRAW = 2.5 each						380/3/50 (voltage code O) 4 Wire System EC MOTOR AMP DRAW = 2.5 each	
MODEL	kW (code)	Temp Rise °F	# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT (including motor)		BREAKER RATING PER CIRCUIT					
				120V/1	480V/3	120V/1	480V/3		208V/1	480V/3	208V/1	480V/3		240V/1	480V/3	240V/1	480V/3									
AE08-F-1036E AE08-F-1042E	10 (100)	30	2	4.4	12.0	15	15	2	2.5	12.0	15	15	2	2.5	12.0	15	15	1	17.7	25						
	7.5 (075)	23	2	4.4	9.0	15	15	2	2.5	9.0	15	15	2	2.5	9.0	15	15	1	13.9	20						
	5.6 (056)	17	2	4.4	6.7	15	15	2	2.5	6.7	15	15	2	N/A	6.7	15	15	1	11.0	15						
	4 (040)	12	2	4.4	4.8	15	15	2	2.5	4.8	15	15	2	N/A	4.8	15	15	1	8.6	15						
AE08-F-1048E AE08-F-1060E	14.4 (144)	33	2	4.4	17.3	15	25	2	2.5	17.3	15	25	2	2.5	17.3	15	25	1	24.4	35						
	10.8 (108)	25	2	4.4	13.0	15	20	2	2.5	13.0	15	20	2	2.5	13.0	15	20	1	18.9	25						
	8.1 (081)	19	2	4.4	9.7	15	15	2	2.5	9.7	15	15	2	2.5	9.7	15	15	1	14.8	20						
	5.6 (056)	13	2	4.4	6.7	15	15	2	2.5	6.7	15	15	2	2.5	6.7	15	15	1	11.0	15						
AE08-F-1072E	20 (200)	30	2	4.4	24.1	15	35	2	2.5	24.1	15	35	2	2.5	24.1	15	35	1	32.9	45						
	15 (150)	23	2	4.4	18.0	15	25	2	2.5	18.0	15	25	2	2.5	18.0	15	25	1	25.3	35						
	11.2 (112)	17	2	4.4	13.5	15	20	2	2.5	13.5	15	20	2	2.5	13.5	15	20	1	19.5	25						
	8 (080)	12	2	4.4	9.6	15	15	2	2.5	9.6	15	15	2	2.5	9.6	15	15	1	14.7	20						
AE08-F-2078E AE08-F-2084E	20 (200)	26	2	8.8	24.1	15	35	2	5.0	24.1	15	35	2	5.0	24.1	15	35	1	35.4	45						
	15 (150)	20	2	8.8	18.0	15	25	2	5.0	18.0	15	25	2	5.0	18.0	15	25	1	27.8	35						
	11.2 (112)	15	2	8.8	13.5	15	20	2	5.0	13.5	15	20	2	5.0	13.5	15	20	1	22.0	30						
	8 (080)	10	2	8.8	9.6	15	15	2	5.0	9.6	15	15	2	5.0	9.6	15	15	1	17.2	25						
AE08-F-2096E AE08-F-2108E AE08-F-2120E	28.8 (288)	33	2	8.8	34.6	15	45	2	5.0	34.6	15	45	2	5.0	34.6	15	45	1	48.8	60						
	21.6 (216)	25	2	8.8	26.0	15	35	2	5.0	26.0	15	35	2	5.0	26.0	15	35	1	37.8	50						
	16.2 (162)	19	2	8.8	19.5	15	25	2	5.0	19.5	15	25	2	5.0	19.5	15	25	1	29.6	40						
	11.2 (112)	13	2	8.8	13.5	15	20	2	5.0	13.5	15	20	2	5.0	13.5	15	20	-	22.0	30						

			120/1/60 - 600/3/60 (voltage code L) 120V EC MOTOR AMP DRAW = 4.4 each					208/1/60 - 600/3/60 (voltage code M) 208V EC MOTOR AMP DRAW = 2.5 each					240/1/60 - 600/3/60 (voltage code N) 240V EC MOTOR AMP DRAW = 2.5 each				
MODEL	kW (code)	Temp Rise °F	# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT	
				120V/1	600V/3	120V/1	600V/3		208V/1	600V/3	208V/1	600V/3		240V/1	600V/3	240V/1	600V/3
AE08-F-1036E AE08-F-1042E	10 (100)	30	2	4.4	9.6	15	15	2	2.5	9.6	15	15	2	2.5	9.6	15	15
	7.5 (075)	23	2	4.4	7.2	15	15	2	2.5	7.2	15	15	2	2.5	7.2	15	15
	5.6 (056)	17	2	4.4	5.4	15	15	2	2.5	5.4	15	15	2	2.5	5.4	15	15
	4 (040)	12	2	4.4	3.8	15	15	2	2.5	3.8	15	15	2	2.5	3.8	15	15
AE08-F-1048E AE08-F-1060E	14.4 (144)	33	2	4.4	13.9	15	20	2	2.5	13.9	15	20	2	2.5	13.9	15	20
	10.8 (108)	25	2	4.4	10.4	15	15	2	2.5	10.4	15	15	2	2.5	10.4	15	15
	8.1 (081)	19	2	4.4	7.8	15	15	2	2.5	7.8	15	15	2	2.5	7.8	15	15
	5.6 (056)	13	2	4.4	5.4	15	15	2	2.5	5.4	15	15	2	2.5	5.4	15	15
AE08-F-1072E	20 (200)	30	2	4.4	19.2	15	25	2	2.5	19.2	15	25	2	2.5	19.2	15	25
	15 (150)	23	2	4.4	14.4	15	20	2	2.5	14.4	15	20	2	2.5	14.4	15	20
	11.2 (112)	17	2	4.4	10.8	15	15	2	2.5	10.8	15	15	2	2.5	10.8	15	15
	8 (080)	12	2	4.4	7.7	15	15	2	2.5	7.7	15	15	2	2.5	7.7	15	15
AE08-F-2078E AE08-F-2084E	20 (200)	26	2	8.8	19.2	15	25	2	5.0	19.2	15	25	2	5.0	19.2	15	25
	15 (150)	20	2	8.8	14.4	15	20	2	5.0	14.4	15	20	2	5.0	14.4	15	20
	11.2 (112)	15	2	8.8	10.8	15	15	2	5.0	10.8	15	15	2	5.0	10.8	15	15
	8 (080)	10	2	8.8	7.7	15	15	2	5.0	7.7	15	15	2	5.0	7.7	15	15
AE08-F-2096E AE08-F-2108E AE08-F-2120E	28.8 (288)	33	2	8.8	27.7	15	35	2	5.0	27.7	15	35	2	5.0	27.7	15	35
	21.6 (216)	25	2	8.8	20.8	15	30	2	5.0	20.8	15	30	2	5.0	20.8	15	30
	16.2 (162)	19	2	8.8	15.6	15	20	2	5.0	15.6	15	20	2	5.0	15.6	15	20
	11.2 (112)	13	2	8.8	10.8	15	15	2	5.0	10.8	15	15	2	5.0	10.8	15	15

AE08-F ELEC HEATED SYSTEM: 208 - 480V & DUAL VOLTAGES

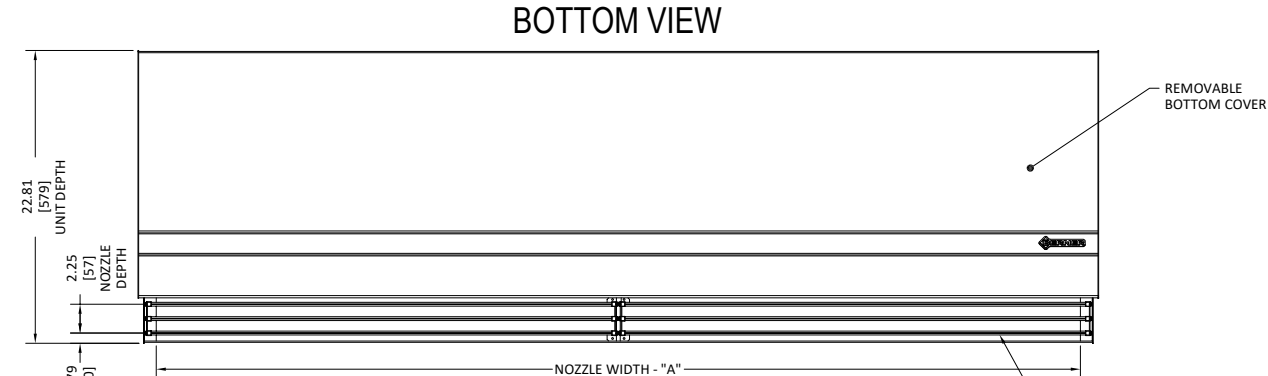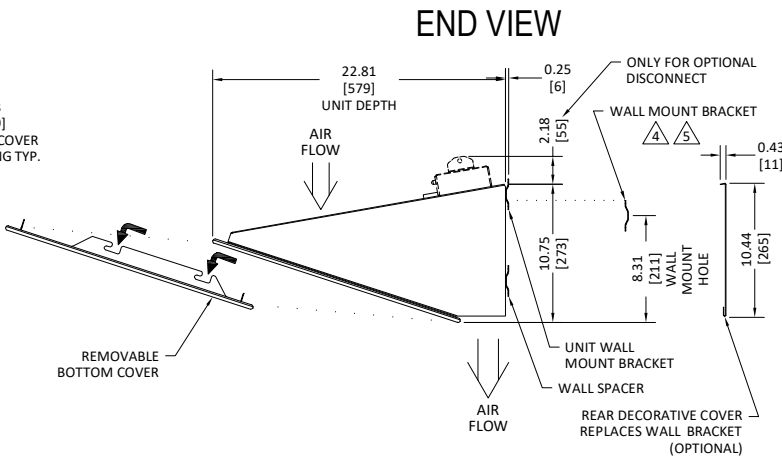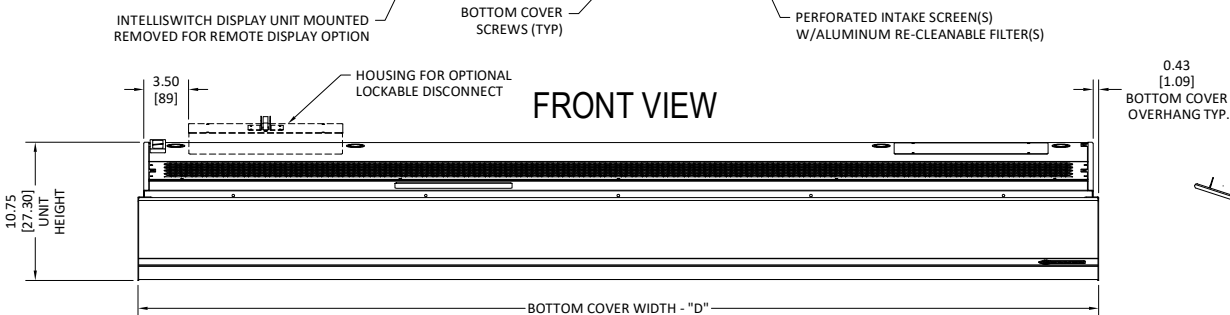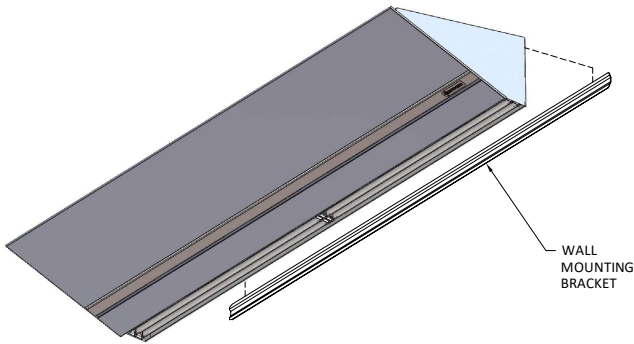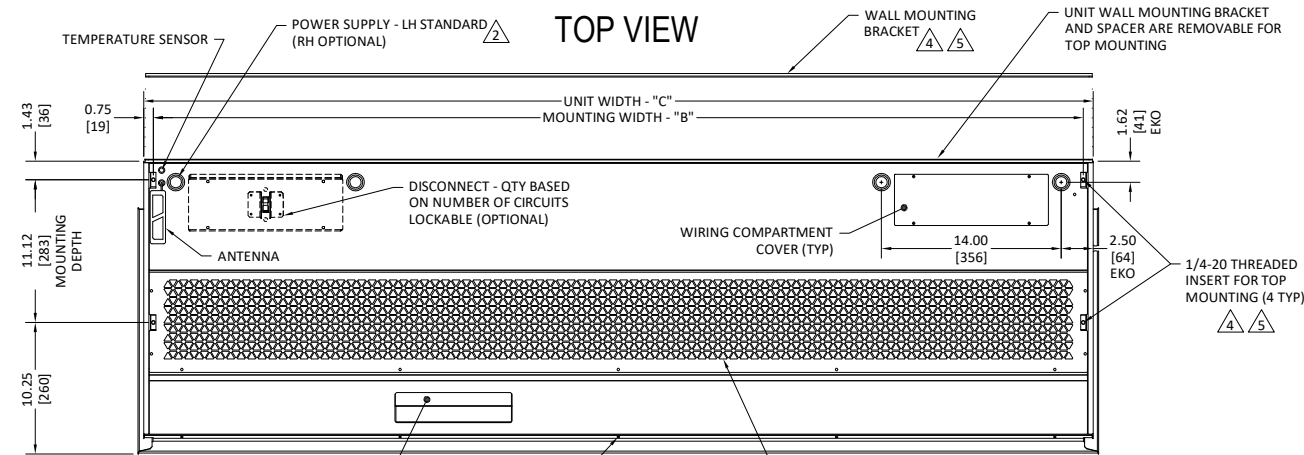

MODEL	NOZZLE WIDTH "A"	MOUNTING WIDTH "B"	UNIT WIDTH "C"	BOTTOM CVR WIDTH "D"
AE08-F-1036E*	36.00 [914]	36.50 [927]	38.00 [965]	38.88 [987]
AE08-F-1042E*	42.00 [1067]	42.50 [1080]	44.00 [1118]	44.88 [1140]
AE08-F-1048E*	48.00 [1219]	48.50 [1232]	50.00 [1270]	50.88 [1292]
AE08-F-1060E*	59.00 [1499]	59.50 [1511]	61.00 [1549]	61.88 [1572]
AE08-F-1072E*	72.00 [1829]	72.50 [1842]	74.00 [1880]	74.88 [1902]
AE08-F-2078E*	78.00 [1981]	78.50 [1994]	80.00 [2032]	80.88 [2054]
AE08-F-2084E*	84.00 [2134]	84.50 [2146]	86.00 [2184]	86.88 [2207]
AE08-F-2096E*	96.00 [2438]	96.50 [2451]	98.00 [2489]	98.88 [2512]
AE08-F-2108E*	108.00 [2743]	108.50 [2756]	110.00 [2794]	110.88 [2816]
AE08-F-2120E*	118.00 [2997]	118.50 [3010]	120.00 [3048]	120.88 [3070]

NOTES:





- 1 AIR CURTAIN MUST BE INSTALLED SO AIR STREAM IS NOT OBSTRUCTED WHEN DEFLECTED 20° TO EITHER SIDE OF C.
- 2 ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- 3 FIELD VERIFY DIMENSIONS.
- 4 ANCHORS TO SUPPORTING STRUCTURE BY OTHERS.
- 5 ADEQUACY OF SUPPORTING STRUCTURE IS TO BE VERIFIED BY A PROFESSIONAL STRUCTURAL ENGINEER.
- 6 THE 12th CHARACTER IN THE MODEL NUMBER - "E" DESIGNATES ELECTRIC (HEATED) UNIT.
- 7 DIMENSIONS IN INCHES [MILLIMETERS].

* VOLTAGE CODES

B	= 208/1/60
J	= 240/1/60
V	= 220/1/50
K	= 120/480
L	= 120/600
S	= 208/480
M	= 208/600
U	= 240/480
N	= 240/600
X	= 208/3/60
Y	= 240/3/60
O	= 380/3/50
W	= 277/1/60
WZ	= 480/3/60

PROJECT	REV 0	
LOCATION		
ARCHITECT		
ENGINEER		
DWG. NO.	AE08-F-ELE-208	TITLE: BERNER
DATE	11NOV2024	MODEL AE08-F AIR CURTAIN 208 - 480V
BY	D. Johnson	ELECTRIC HEATED SYSTEM
REPLACES	-	BERNER INTERNATIONAL CORP. NEW CASTLE, PA.
BY	-	

AE08-F ELECTRIC HEATED SYSTEM: 600V

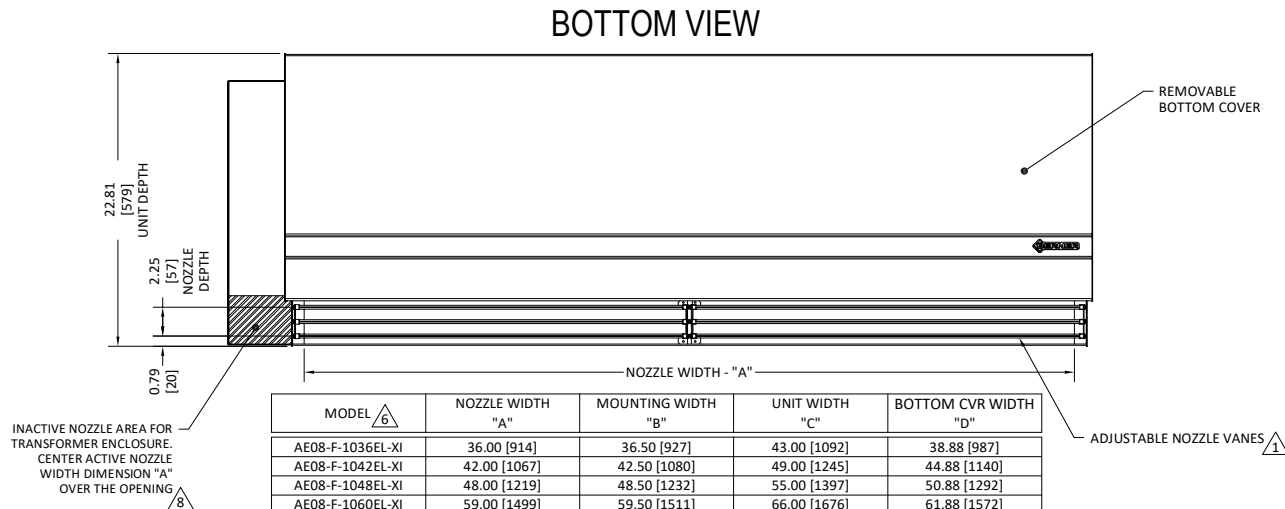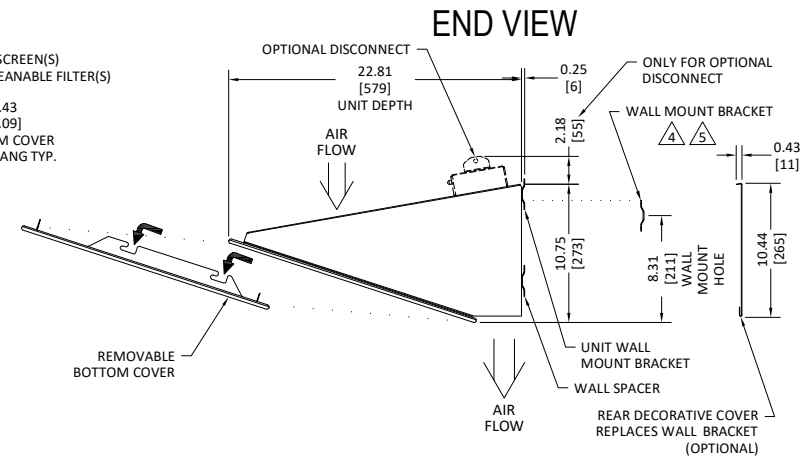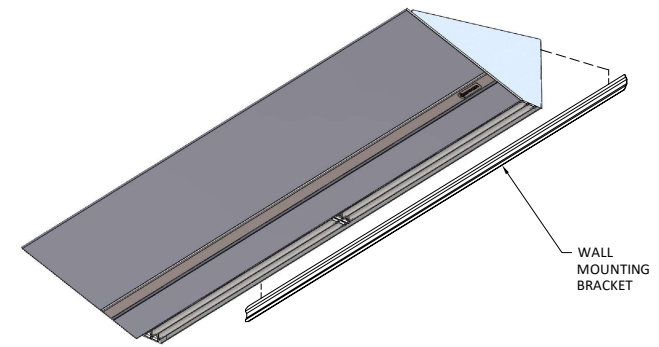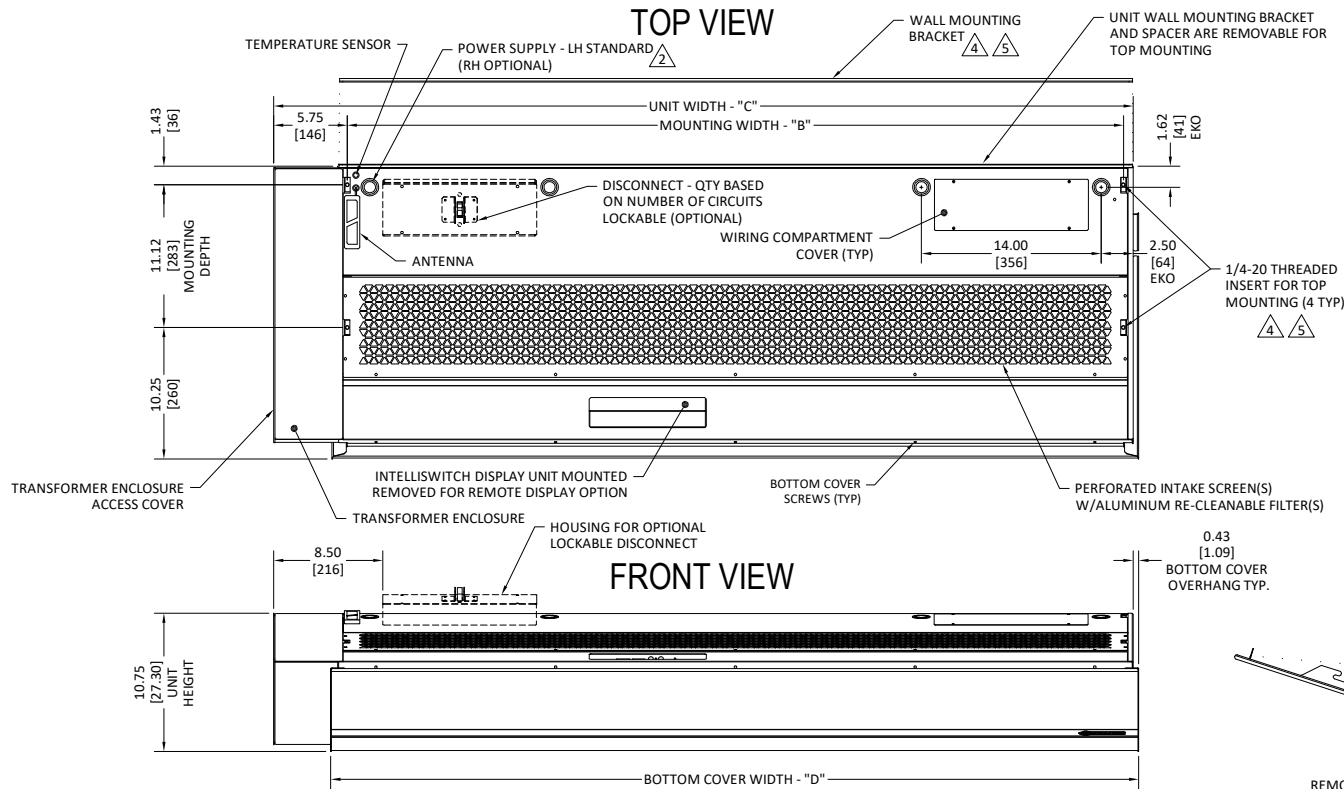

MODEL ⁶	NOZZLE WIDTH "A"	MOUNTING WIDTH "B"	UNIT WIDTH "C"	BOTTOM CVR WIDTH "D"
AE08-F-1036EL-XI	36.00 [914]	36.50 [927]	43.00 [1092]	38.88 [987]
AE08-F-1042EL-XI	42.00 [1067]	42.50 [1080]	49.00 [1245]	44.88 [1140]
AE08-F-1048EL-XI	48.00 [1219]	48.50 [1232]	55.00 [1397]	50.88 [1292]
AE08-F-1060EL-XI	59.00 [1499]	59.50 [1511]	66.00 [1676]	61.88 [1572]
AE08-F-1072EL-XI	72.00 [1829]	72.50 [1842]	79.00 [2007]	74.88 [1902]
AE08-F-2078EL-XI	78.00 [1981]	78.50 [1994]	85.00 [2159]	80.88 [2054]
AE08-F-2084EL-XI	84.00 [2134]	84.50 [2146]	91.00 [2311]	86.88 [2207]
AE08-F-2096EL-XI	96.00 [2438]	96.50 [2451]	103.00 [2616]	98.88 [2512]
AE08-F-2108EL-XI	108.00 [2743]	108.50 [2756]	115.00 [2921]	110.88 [2816]
AE08-F-2120EL-XI	118.00 [2997]	118.50 [3010]	125.00 [3175]	120.88 [3070]

NOTES:

- 1 AIR CURTAIN MUST BE INSTALLED SO AIR STREAM IS NOT OBSTRUCTED WHEN DEFLECTED 20° TO EITHER SIDE OF C.
- 2 ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- 3 FIELD VERIFY DIMENSIONS.
- 4 ANCHORS TO SUPPORTING STRUCTURE BY OTHERS.
- 5 ADEQUACY OF SUPPORTING STRUCTURE IS TO BE VERIFIED BY A PROFESSIONAL STRUCTURAL ENGINEER.
- 6 THE 12th CHARACTER IN THE MODEL NUMBER - "E" DESIGNATES ELECTRIC (HEATED) UNIT.
- 7 DIMENSIONS IN INCHES [MILLIMETERS].
- 8 NO AIR FLOW AREA HOUSES TRANSFORMER. CENTER ACTIVE NOZZLE WIDTH DIMENSION "A" OVER THE OPENING.

SHEET 1 OF 1

PROJECT		REV	0
LOCATION			
ARCHITECT			
ENGINEER			
DWG. NO.	AE08-F-ELE-600	TITLE:	BERNER
DATE	11NOV2024		MODEL AE08-F AIR CURTAIN 600V ELECTRIC HEATED SYSTEM
BY	D. Johnson		
REPLACES	-		
BY	-		BERNER INTERNATIONAL CORP. NEW CASTLE, PA.