


Vestibule Exception Compliance: up to 10 ft. AFF / Optimal Environmental Separation: up to 8 ft. AFF



Berner International certifies that the air curtains shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. Rated data shown is for base (hot water heated) units. The AMCA Certified Ratings Seal applies to airflow rate, average outlet velocity, outlet velocity uniformity, velocity projection and power rating at free delivery only.

2 Year Limited Warranty

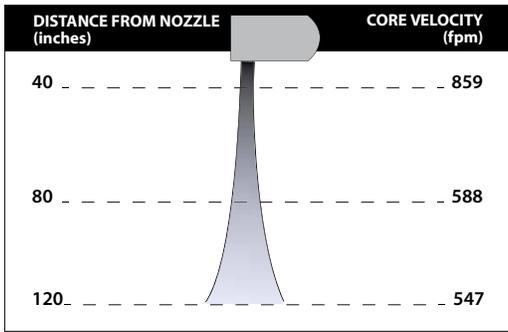

indoor use



MODEL	Nozzle Width (in)	Max Vel. at Nozzle (fpm)	Avg. Outlet Vel. (fpm)	Air Volume (cfm)	Outlet Vel. Uniformity	Power Rating (kW)	Motor(s) @ hp	Coil Output (MBH)	Entering / Leaving Water Temp. (°F)	Water Flow (GPM)	Fluid Pressure Drop (FT. WG.)	Air Temp. Rise (°F)	Net Wt. (lbs)
AE08-F-1036W	36.00	2,054	1,545	869	84%	0.19	1 @ 1/5	27.1	180° / 166°	4.0	1.3	29°	72
AE08-F-1042W	42.00	1,985	1,547	1,015	82%	0.20	1 @ 1/5	32.9	180° / 166°	5.0	2.1	30°	82
AE08-F-1048W	48.00	2,013	1,585	1,189	80%	0.23	1 @ 1/5	37.9	180° / 164°	5.0	2.1	29°	91
AE08-F-1060W	59.00	2,040	1,552	1,431	80%	0.26	1 @ 1/5	46.0	180° / 161°	5.0	2.2	29°	111
AE08-F-1072W	72.00	1,928	1,394	1,568	83%	0.28	1 @ 1/5	55.8	180° / 164°	7.0	4.4	32°	133
AE08-F-2078W	78.00	2,054	1,546	1,884	82%	0.39	2 @ 1/5	62.8	180° / 162°	7.0	4.5	30°	157
AE08-F-2084W	84.00	1,985	1,547	2,030	82%	0.41	2 @ 1/5	67.3	180° / 160°	7.0	4.6	30°	160
AE08-F-2096W	96.00	2,013	1,585	2,378	80%	0.46	2 @ 1/5	80.4	180° / 162°	9.0	7.8	31°	180
AE08-F-2108W	108.00	2,040	1,553	2,620	80%	0.49	2 @ 1/5	88.6	180° / 160°	9.0	8.0	31°	199
AE08-F-2120W	118.00	2,040	1,552	2,862	80%	0.53	2 @ 1/5	97.8	180° / 160°	10.0	10.1	31°	214

See sheet EP-226E for amp draws/total load requirements. 600/3/60 & 277/1/60 power supplies include extended cabinet, See drawing AE08-F-HW-TR.

NOTES:

- Standard connection top, same end supply/return.
- Coil should be field supplied with a solenoid valve that energizes only when air curtain is energized. Consideration must be taken for freeze protection when necessary.
- Coil performance based on 65°F entering air temperature.
- Maximum leaving air temperature shall not exceed 120F.
- Consult factory for alternate entering air & water temperatures or GPM's.

MODEL NUMBER CONFIGURATION

AE08-F-1 036 W A-EC-CM -D-R-LL-SA

Series	Version	# of Motors	Opening Width	Heat	Voltage	Motor Type	Berner AIR	Opt. Interconnect	Opt. Display	Supply/Return	Material / Finish	
											Cabinet	Bottom Panel
AE08	F	1, 2	036" - 120"	W=Hot Water Heated	A=120/1/60* B=208/1/60 J=240/1/60 V=230/1/50 W=277/1/60 † A-XI=600/3/60 †	EC Motor	CM=BMS	D=Physical Data Link (daisy chain)	R=Remote Display TB=Tablet	LL=Left Hand RR=Right Hand	S=Stainless (std) A= Anod Alum C=Custom Color	A=Anod Alum (std) S=Stainless C=Custom Color

STANDARD CONSTRUCTION

- 11" high x 23" deep
- 1/5 hp EC motor(s)
- Touchscreen interface with Intelliswitch™ digital controller, includes Berner AIR® BMS (smart control and BACnet & Modbus)
- Cabinet: Brushed stainless steel, grade 304
- Bottom Panel: Clear satin anodized aluminum
- Wall or Top Mounting
- High efficiency, low noise, articulating Pro-V Nozzle
- Filter (washable)
- Factory installed coil

Options

- Custom Color or Stainless
- Rear cover for top mounting to conceal fasteners

*Suitable for 50hz
† Add 5" to cabinet width for transformer

for Standard offering, leave options (Opt.) blank

VELOCITY PROJECTION: Model AE08-F-1036W			
Distance from Nozzle (in)	40	80	120
Core Velocity (fpm)	859	588	547
Uniformity (%)	89%	87%	91%

ASHRAE 90.1-2019 vestibule exception requires, "a jet velocity of not less than 6.6 feet per second (400 fpm; 2.0 m/s) at 6.0 in (15 cm) above the floor."

Sound level measured 10' (3m) from the unit in free field:
1 motor: Min./Max. Speed: 50/55 dBA
2 motors: Min./Max. Speed: 53/58 dBA

Sound data is not AMCA certified.

Berner reserves the right to alter specifications without prior notice.



ARCHITECTURAL ELITE 8 - EC MOTORS






Hot Water Heated Air Curtain Electrical Performance Sheet

		120/1/60 (voltage code A) EC MOTOR AMP DRAW = 4.4 each		208/1/60 (voltage code B) EC MOTOR AMP DRAW = 2.5 each		240/1/60 (voltage code J) or 230/1/50 (voltage code V) EC MOTOR AMP DRAW = 2.5 each			
MODEL	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT
AE08-F-1036W AE08-F-1042W AE08-F-1048W AE08-F-1060W AE08-F-1072W	1	4.4	15	1	2.5	15	1	2.5	15
AE08-F-2078W AE08-F-2084W AE08-F-2096W AE08-F-2108W AE08-F-2120W	1	8.8	15	1	5.0	15	1	5.0	15

		277/1/60 (voltage code W) EC MOTOR AMP DRAW = 2.2 each		600/3/60 (voltage code A-XI) XFMR 600/120 0.5kVA per MTR = 0.8 each EC MOTOR AMP DRAW = 4.4 each @ 120V		
MODEL	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT
AE08-F-1036W AE08-F-1042W AE08-F-1048W AE08-F-1060W AE08-F-1072W	1	2.2	15	1	0.8	15
AE08-F-2078W AE08-F-2084W AE08-F-2096W AE08-F-2108W AE08-F-2120W	1	4.4	15	1	1.6	15

Berner reserves the right to alter specifications without prior notice.

AE08-F WATER HEATED SYSTEM: 120 - 240V

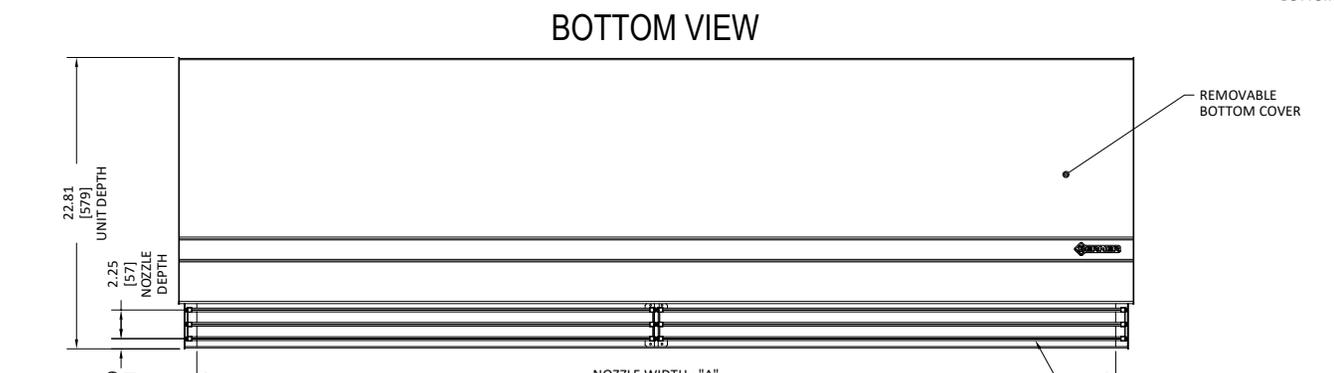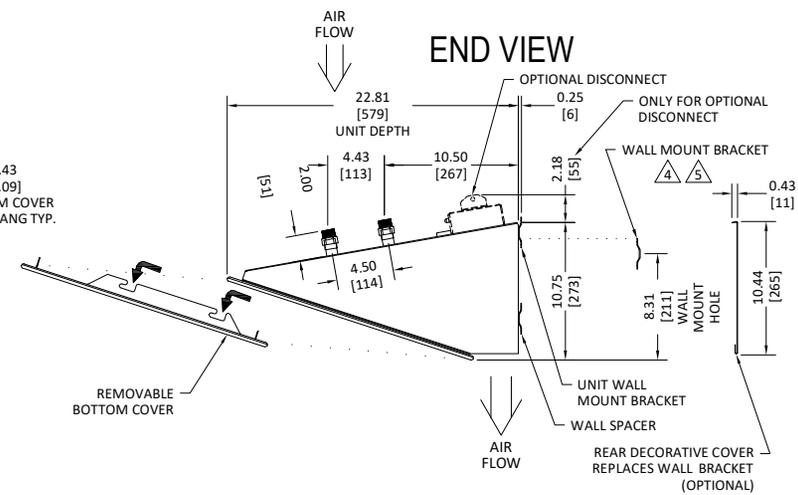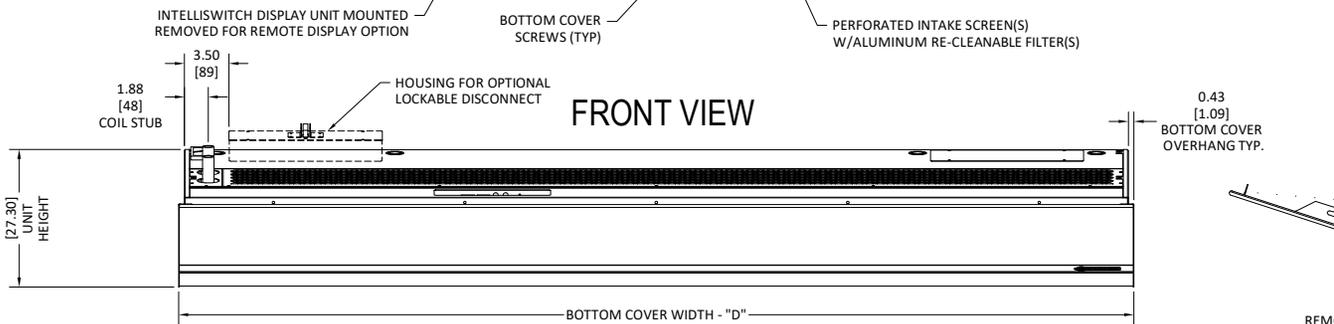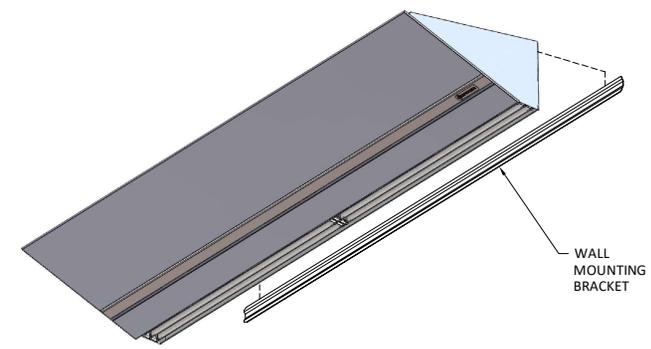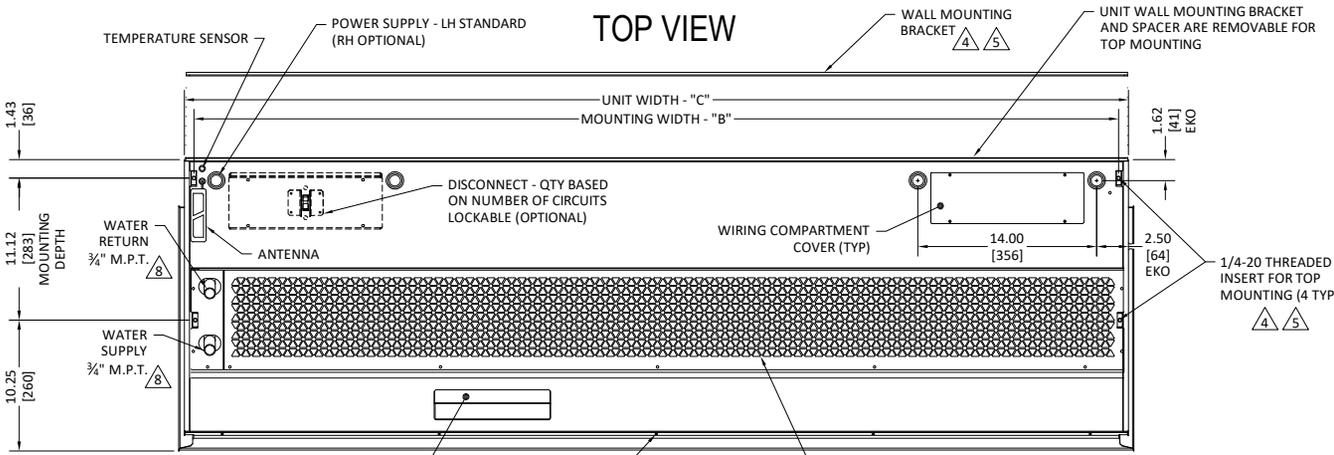

MODEL ⁶	NOZZLE WIDTH "A"	MOUNTING WIDTH "B"	UNIT WIDTH "C"	BOTTOM CVR WIDTH "D"
AE08-F-1036W	36.00 [914]	36.50 [927]	38.00 [965]	38.88 [987]
AE08-F-1042W	42.00 [1067]	42.50 [1080]	44.00 [1118]	44.88 [1140]
AE08-F-1048W	48.00 [1219]	48.50 [1232]	50.00 [1270]	50.88 [1292]
AE08-F-1060W	59.00 [1499]	59.50 [1511]	61.00 [1549]	61.88 [1572]
AE08-F-1072W	72.00 [1829]	72.50 [1842]	74.00 [1880]	74.88 [1902]
AE08-F-2078W	78.00 [1981]	78.50 [1994]	80.00 [2032]	80.88 [2054]
AE08-F-2084W	84.00 [2134]	84.50 [2146]	86.00 [2184]	86.88 [2207]
AE08-F-2096W	96.00 [2438]	96.50 [2451]	98.00 [2489]	98.88 [2512]
AE08-F-2108W	108.00 [2743]	108.50 [2756]	110.00 [2794]	110.88 [2816]
AE08-F-2120W	118.00 [2997]	118.50 [3010]	120.00 [3048]	120.88 [3070]





NOTES:

- 1 AIR CURTAIN MUST BE INSTALLED SO AIR STREAM IS NOT OBSTRUCTED WHEN DEFLECTED 20° TO EITHER SIDE OF C.
- 2 ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- 3 FIELD VERIFY DIMENSIONS.
- 4 ANCHORS TO SUPPORTING STRUCTURE BY OTHERS.
- 5 ADEQUACY OF SUPPORTING STRUCTURE IS TO BE VERIFIED BY A PROFESSIONAL STRUCTURAL ENGINEER.
- 6 THE LAST CHARACTER IN THE MODEL NUMBER - "W" DESIGNATES WATER HEATED UNIT.
- 7 DIMENSIONS IN INCHES [MILLIMETERS].
- 8 COIL CONNECTIONS LH STANDARD (AS SHOWN), OPTIONAL RH.

SHEET 1 OF 1

PROJECT		REV	0
LOCATION			
ARCHITECT			
ENGINEER			
DWG. NO.	AE08-F-WTR-120	TITLE:	BERNER
DATE	11NOV2024		MODEL AE08-F AIR CURTAIN 120 - 240V WATER HEATED SYSTEM
BY	D. Johnson		
REPLACES	-		
BY	-		BERNER INTERNATIONAL CORP. NEW CASTLE, PA.

AE08-F WATER HEATED SYSTEM: 277 - 600V

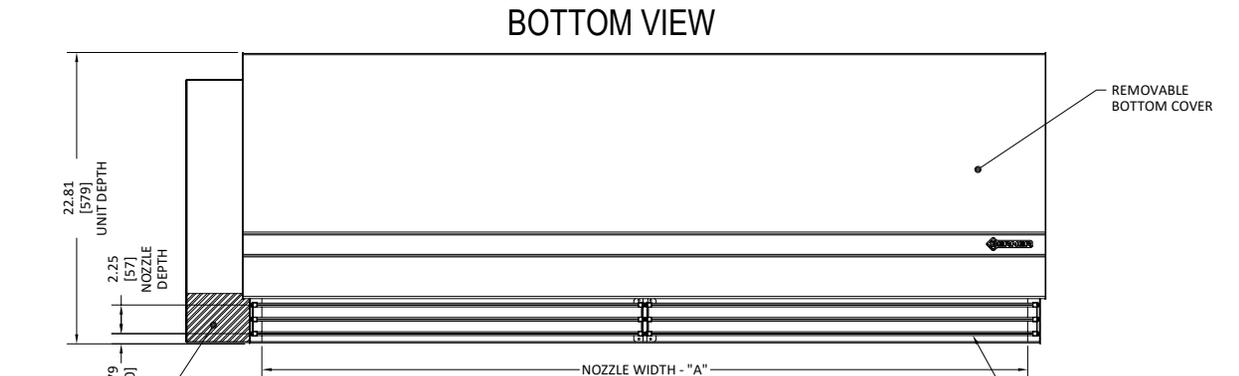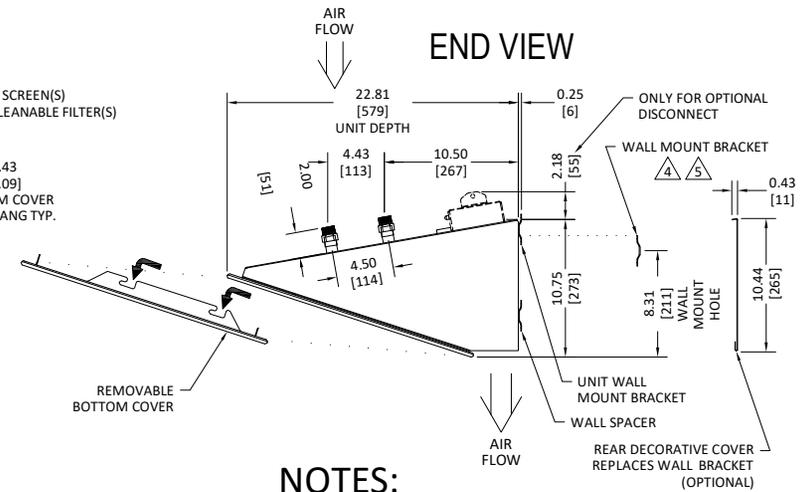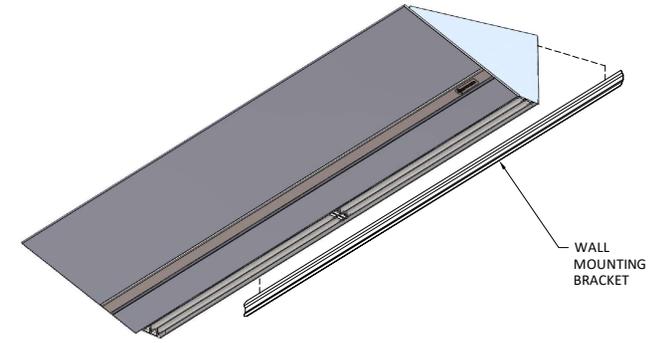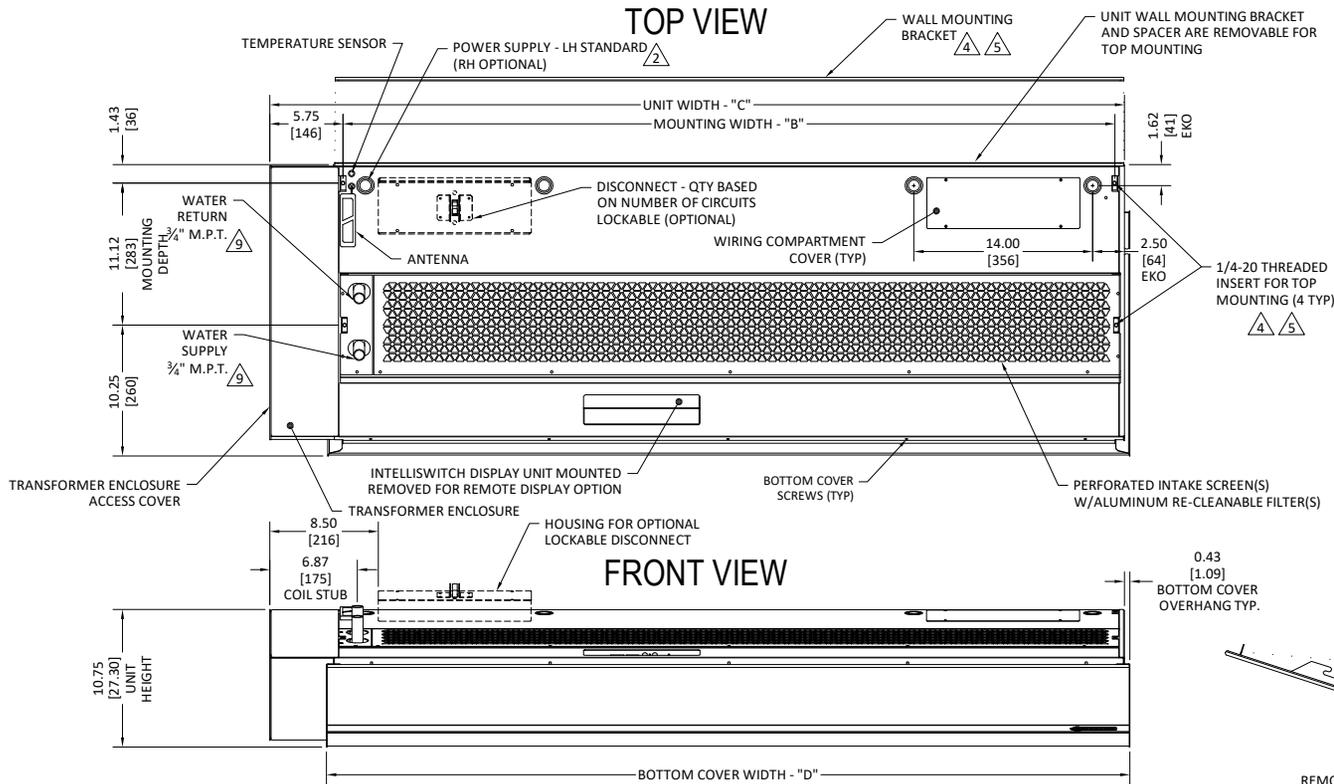

NOTES:

- 1 AIR CURTAIN MUST BE INSTALLED SO AIR STREAM IS NOT OBSTRUCTED WHEN DEFLECTED 20° TO EITHER SIDE OF ϕ .
- 2 ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- 3 FIELD VERIFY DIMENSIONS.
- 4 ANCHORS TO SUPPORTING STRUCTURE BY OTHERS.
- 5 ADEQUACY OF SUPPORTING STRUCTURE IS TO BE VERIFIED BY A PROFESSIONAL STRUCTURAL ENGINEER.
- 6 THE LAST CHARACTER IN THE MODEL NUMBER - "W" DESIGNATES WATER HEATED UNIT.
- 7 DIMENSIONS IN INCHES [MILLIMETERS].
- 8 NO AIR FLOW AREA HOUSES TRANSFORMER. CENTER ACTIVE NOZZLE WIDTH DIMENSION "A" OVER THE OPENING.
- 9 COIL CONNECTIONS LH STANDARD (AS SHOWN), OPTIONAL RH.

MODEL	NOZZLE WIDTH "A"	MOUNTING WIDTH "B"	UNIT WIDTH "C"	BOTTOM CVR WIDTH "D"
AE08-F-1036W	36.00 [914]	36.50 [927]	43.00 [1092]	38.88 [987]
AE08-F-1042W	42.00 [1067]	42.50 [1080]	49.00 [1245]	44.88 [1140]
AE08-F-1048W	48.00 [1219]	48.50 [1232]	55.00 [1397]	50.88 [1292]
AE08-F-1060W	59.00 [1499]	59.50 [1511]	66.00 [1676]	61.88 [1572]
AE08-F-1072W	72.00 [1829]	72.50 [1842]	79.00 [2007]	74.88 [1902]
AE08-F-2078W	78.00 [1981]	78.50 [1994]	85.00 [2159]	80.88 [2054]
AE08-F-2084W	84.00 [2134]	84.50 [2146]	91.00 [2311]	86.88 [2207]
AE08-F-2096W	96.00 [2438]	96.50 [2451]	103.00 [2616]	98.88 [2512]
AE08-F-2108W	108.00 [2743]	108.50 [2756]	115.00 [2921]	110.88 [2816]
AE08-F-2120W	118.00 [2997]	118.50 [3010]	125.00 [3175]	120.88 [3070]

PROJECT		REV	0
LOCATION			
ARCHITECT			
ENGINEER			
DWG. NO.	AE08-F-WTR-600	TITLE:	BERNER MODEL AE08-F AIR CURTAIN 277 - 600V WATER HEATED SYSTEM
DATE	11NOV2024		
BY	D. Johnson		
REPLACES	-		
BY	-		
BERNER INTERNATIONAL CORP. NEW CASTLE, PA.			