


Vestibule Exception Compliance: up to 14 ft. AFF / Optimal Environmental Separation: up to 10 ft. AFF



Berner International certifies that the air curtains shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. Rated data shown is for base (hot water heated) units. The AMCA Certified Ratings Seal applies to airflow rate, average outlet velocity, outlet velocity uniformity, velocity projection and power rating at free delivery only.

2 Year Limited Warranty

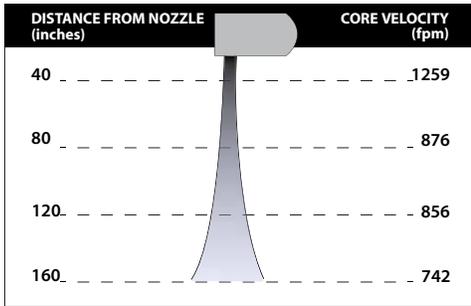

indoor use



MODEL	Nozzle Width (in)	Max Vel. at Nozzle (fpm)	Avg. Outlet Vel. (fpm)	Air Volume (cfm)	Outlet Vel. Uniformity	Power Rating (kW)	Motor(s) @ hp	Coil Output (MBH)	Entering / Leaving Water Temp. (°F)	Water Flow (GPM)	Fluid Pressure Drop (FT. WG.)	Air Temp. Rise (°F)	Net Wt. (lbs)
AI10-F-1036W	36.00	3,522	1,916	1,317	80%	0.49	1 @ 1/2	33.2	180°/163°	4.0	0.5	23°	110
AI10-F-1042W	42.00	3,429	1,709	1,371	82%	0.50	1 @ 1/2	36.8	180°/161°	4.0	0.5	25°	122
AI10-F-1048W	48.00	4,040	1,833	1,680	90%	0.63	1 @ 1/2	45.3	180°/161°	5.0	0.8	25°	141
AI10-F-1060W	59.00	4,146	1,541	1,736	85%	0.63	1 @ 1/2	55.1	180°/164°	7.0	1.6	29°	156
AI10-F-2072W	72.00	3,522	1,916	2,634	80%	0.98	2 @ 1/2	74.3	180°/161°	8.0	2.1	26°	216
AI10-F-2078W	78.00	3,522	1,805	2,688	80%	0.99	2 @ 1/2	77.9	180°/160°	8.0	2.2	26°	219
AI10-F-2084W	84.00	3,429	1,709	2,742	82%	1.00	2 @ 1/2	81.4	180°/159°	8.0	2.2	27°	240
AI10-F-2096W	96.00	4,040	1,833	3,360	90%	1.26	2 @ 1/2	98.9	180°/160°	10.0	3.6	27°	278
AI10-F-2108W	108.00	4,146	1,656	3,416	85%	1.26	2 @ 1/2	106.9	180°/160°	11.0	4.5	29°	293
AI10-F-2120W	118.00	4,146	1,541	3,472	85%	1.26	2 @ 1/2	113.7	180°/161°	12.0	5.5	30°	306
AI10-F-3132W	132.00	4,040	1,855	4,677	80%	1.75	3 @ 1/2	140.65	180°/159°	14.0	7.7	27°	384
AI10-F-3144W	144.00	4,040	1,833	5,040	90%	1.89	3 @ 1/2	153.0	180°/159°	15.0	9.1	28°	415


See sheets EP-296E-AC & EP-296E-EC for amp draws/total load requirements. 600/3/60 power supply includes extended cabinet, See drawing AI10-F-WTR-600

NOTES:

- Standard connection same end supply/return.
- Coil should be field supplied with a solenoid/control valve that energizes only when air curtain is energized. Consideration must be taken for freeze protection when necessary.
- Coil performance based on 65°F entering air temperature.
- Maximum leaving air temperature shall not exceed 120F.
- Consult factory for alternate entering air & water temperatures or GPM's.
- Operation of standard motor (AC) at 50Hz will generate a 17% reduction in performance; no reduction for optional EC motors.

MODEL NUMBER CONFIGURATION

AI10-F-1 036 W A-AC-CB-D-R-SS

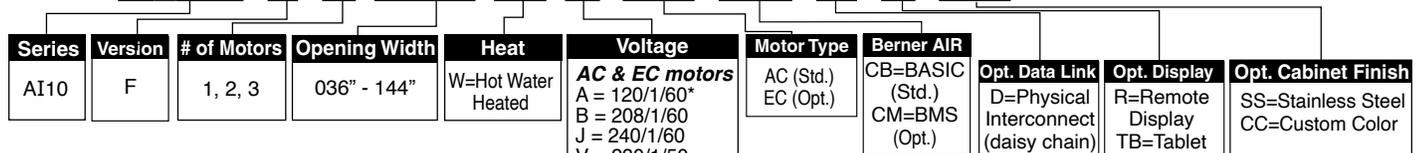

STANDARD CONSTRUCTION

- 12 3/4" high x 22" deep
- 1/2 hp AC motor(s) - ten speeds
- Touchscreen interface with Intelliswitch™ digital controller, includes Berner AIR® BASIC (smart control)
- Clear satin anodized aluminum exterior
- Wall or Top Mounting
- High efficiency, low noise, articulating, three vane, Pro-V Nozzle
- Factory installed coil
- Filter (washable)

OPTIONS

- 1/2 hp EC motor(s) - ten speeds
- Berner AIR® BMS (smart control with BACnet and Modbus capabilities)
- Custom Color or Stainless
- Rear cover for top mounting to conceal fasteners

*Suitable for 50 Hz
† Add 12" to cabinet width for transformer

VELOCITY PROJECTION: Model AI10-F-1036W				
Distance from Nozzle (in)	40	80	120	160
Core Velocity (fpm)	1259	876	856	742
Uniformity (%)	83%	88%	92%	96%

ASHRAE 90.1-2019 vestibule exception requires, "a jet velocity of not less than 6.6 feet per second (400 fpm; 2.0 m/s) at 6.0 in (15 cm) above the floor."

Sound level measured 10' (3m) from the unit in free field:
 1 motor: Min./Max. Speed: 53/56 dBA
 2 motors: Min./Max. Speed: 56/59 dBA
 3 motors: Min./Max. Speed: 59/61 dBA
 Sound data is not AMCA certified.

Berner reserves the right to alter specifications without prior notice.



ARCHITECTURAL ICON 10 - AC MOTORS

Hot Water Heated Air Curtain Electrical Performance Sheet

MODEL	# CKTS	120/1/60 (voltage code A) AC MOTOR AMP DRAW = 8.5 each		# CKTS	208/1/60 (voltage code B) AC MOTOR AMP DRAW = 4.3 each		# CKTS	240/1/60 (voltage code J) or 230/1/50 (voltage code V) AC MOTOR AMP DRAW = 4.3 each	
		AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT		AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT		AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT
AI10-F-1036W AI10-F-1042W AI10-F-1048W AI10-F-1060W	1	8.5	15	1	4.3	15	1	4.3	15
AI10-F-2072W AI10-F-2078W AI10-F-2084W AI10-F-2096W AI10-F-2108W AI10-F-2120W	1	17.0	25	1	8.6	15	1	8.6	15
AI10-F-3132W AI10-F-3144W	1	25.5	35	1	12.9	20	1	12.9	20

MODEL	# CKTS	277/1/60 (voltage code W) AC MOTOR AMP DRAW = 2.6 each		# CKTS	600/3/60 (voltage code A-XI) XFMR 600/120 1 kVA per MTR @ 1.7 each AC MOTOR AMP DRAW= 6.6 each @ 120V	
		AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT		AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT
AI10-F-1036W AI10-F-1042W AI10-F-1048W AI10-F-1060W	1	2.6	15	1	1.7	15
AI10-F-2072W AI10-F-2078W AI10-F-2084W AI10-F-2096W AI10-F-2108W AI10-F-2120W	1	5.2	15	1	3.3	15
AI10-F-3132W AI10-F-3144W	1	7.8	15	1	5.0	15

Berner reserves the right to alter specifications without prior notice.

Berner.com Berner Air Curtains 800.245.4455
111 Progress Ave. / New Castle / PA / 16101 / USA

EP-296E-AC
July, 2025



ARCHITECTURAL ICON 10 - EC MOTORS

Hot Water Heated Air Curtain Electrical Performance Sheet



		120/1/60 (voltage code A) EC MOTOR AMP DRAW = 6.6 each		208/1/60 (voltage code B) EC MOTOR AMP DRAW = 4.1 each		240/1/60 (voltage code J) or 230/1/50 (voltage code V) EC MOTOR AMP DRAW = 4.1 each			
MODEL	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT
AI10-F-1036W AI10-F-1042W AI10-F-1048W AI10-F-1060W	1	6.6	15	1	4.1	15	1	4.1	15
AI10-F-2072W AI10-F-2078W AI10-F-2084W AI10-F-2096W AI10-F-2108W AI10-F-2120W	1	13.2	20	1	8.2	15	1	8.2	15
AI10-F-3132W AI10-F-3144W	1	19.8	25	1	12.3	20	1	12.3	20

		277/1/60 (voltage code W) EC MOTOR AMP DRAW = 3.6 each		600/3/60 (voltage code A-XI) XFMR 600/120 1 kVA per MTR @ 1.7 each EC MOTOR AMP DRAW= 6.6 each @ 120V		
MODEL	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT
AI10-F-1036W AI10-F-1042W AI10-F-1048W AI10-F-1060W	1	3.6	15	1	1.7	15
AI10-F-2072W AI10-F-2078W AI10-F-2084W AI10-F-2096W AI10-F-2108W AI10-F-2120W	1	7.2	15	1	3.3	15
AI10-F-3132W AI10-F-3144W	1	10.8	15	1	5.0	15


Berner reserves the right to alter specifications without prior notice.

A10-F WATER HEATED SYSTEM: 120 - 277V


TOP VIEW

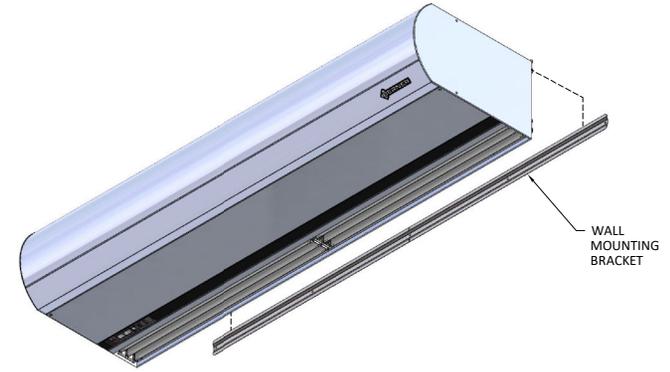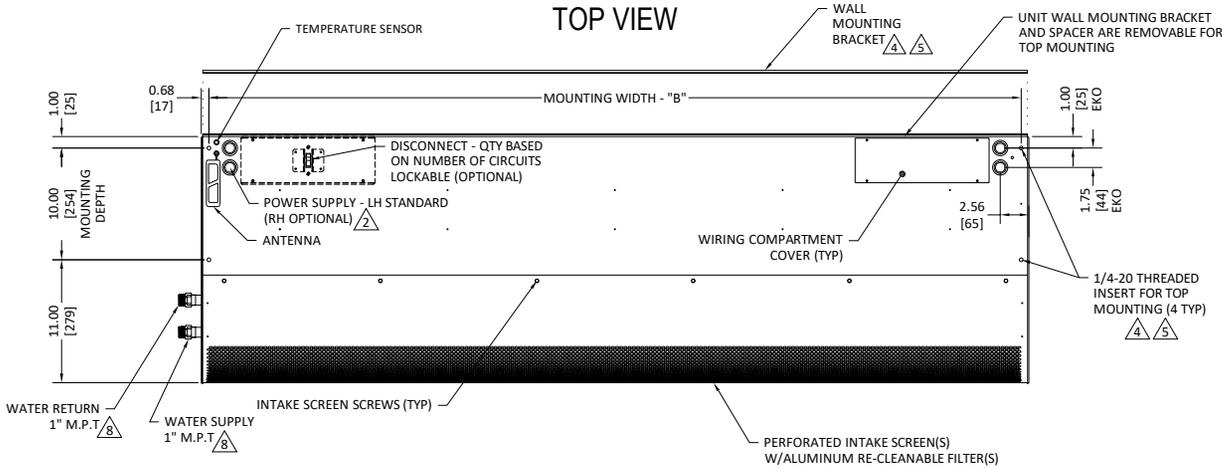


FRONT VIEW

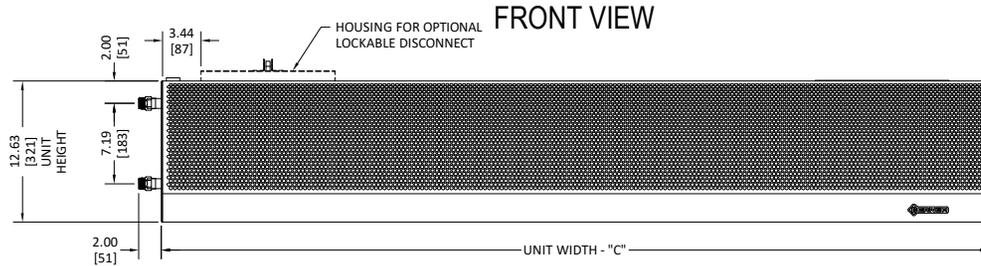

END VIEW

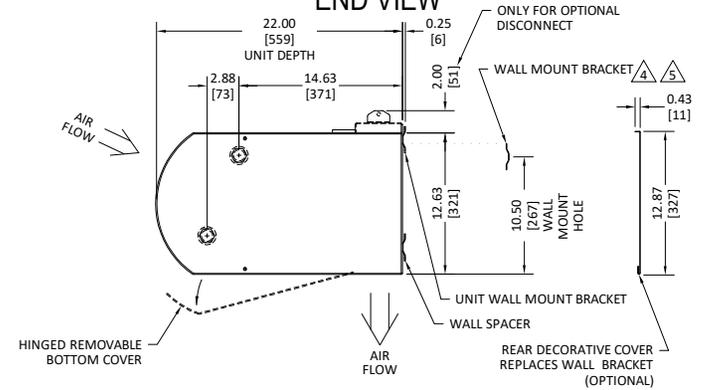

BOTTOM VIEW

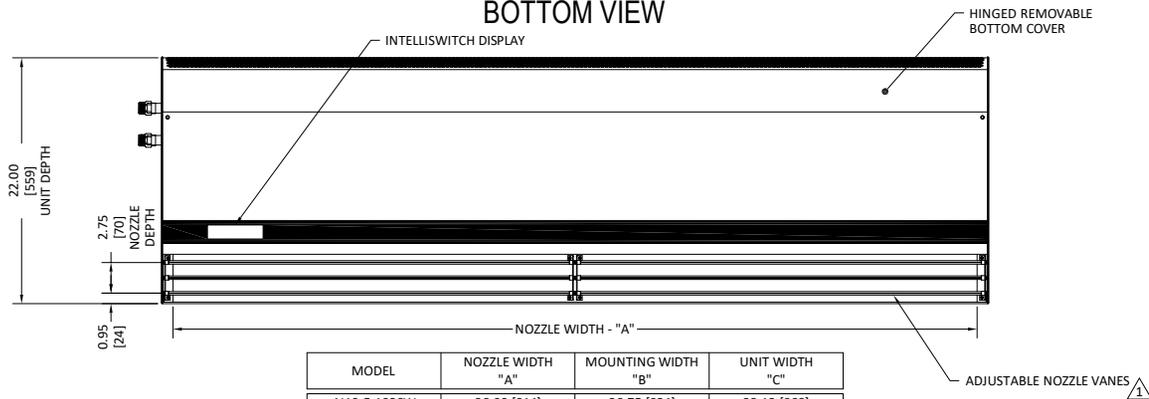

MODEL	NOZZLE WIDTH "A"	MOUNTING WIDTH "B"	UNIT WIDTH "C"
AI10-F-1036W	36.00 [914]	36.75 [934]	38.13 [968]
AI10-F-1042W	42.00 [1067]	42.75 [1086]	44.13 [1121]
AI10-F-1048W	48.00 [1219]	48.75 [1238]	50.13 [1273]
AI10-F-1060W	59.00 [1499]	59.75 [1518]	61.13 [1553]
AI10-F-2072W	72.00 [1829]	72.75 [1848]	74.13 [1883]
AI10-F-2078W	78.00 [1981]	78.75 [2000]	80.13 [2035]
AI10-F-2084W	84.00 [2134]	84.75 [2153]	86.13 [2188]
AI10-F-2096W	96.00 [2438]	96.75 [2458]	98.13 [2492]
AI10-F-2108W	108.00 [2743]	108.75 [2762]	110.13 [2797]
AI10-F-2120W	118.00 [2997]	118.75 [3016]	120.13 [3051]
AI10-F-3132W	132.00 [3353]	132.75 [3372]	134.13 [3407]
AI10-F-3144W	144.00 [3658]	144.75 [3677]	146.13 [3712]

NOTES:


- 1 AIR CURTAIN MUST BE INSTALLED SO AIR STREAM IS NOT OBSTRUCTED WHEN DEFLECTED 20° TO EITHER SIDE OF C.
- 2 ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- 3 FIELD VERIFY DIMENSIONS.
- 4 ANCHORS TO SUPPORTING STRUCTURE BY OTHERS.
- 5 ADEQUACY OF SUPPORTING STRUCTURE IS TO BE VERIFIED BY A PROFESSIONAL STRUCTURAL ENGINEER.
- 6 THE LAST CHARACTER IN THE MODEL NUMBER - "W" DESIGNATES WATER HEATED UNIT.
- 7 DIMENSIONS IN INCHES [MILLIMETERS].
- 8 COIL CONNECTIONS LH STANDARD (AS SHOWN), OPTIONAL RH.

SHEET 1 OF 1


PROJECT		REV	0
LOCATION			
ARCHITECT			
ENGINEER			
DWG. NO.	AI10-F-WTR-120	TITLE:	BERNER
DATE	24JAN2025		MODEL AI10-F AIR CURTAIN 120 - 277V WATER HEATED SYSTEM
BY	S. Beil		
REPLACES	-		
BY	-		BERNER INTERNATIONAL CORP. NEW CASTLE, PA.

A110-F WATER HEATED SYSTEM: 600V


TOP VIEW

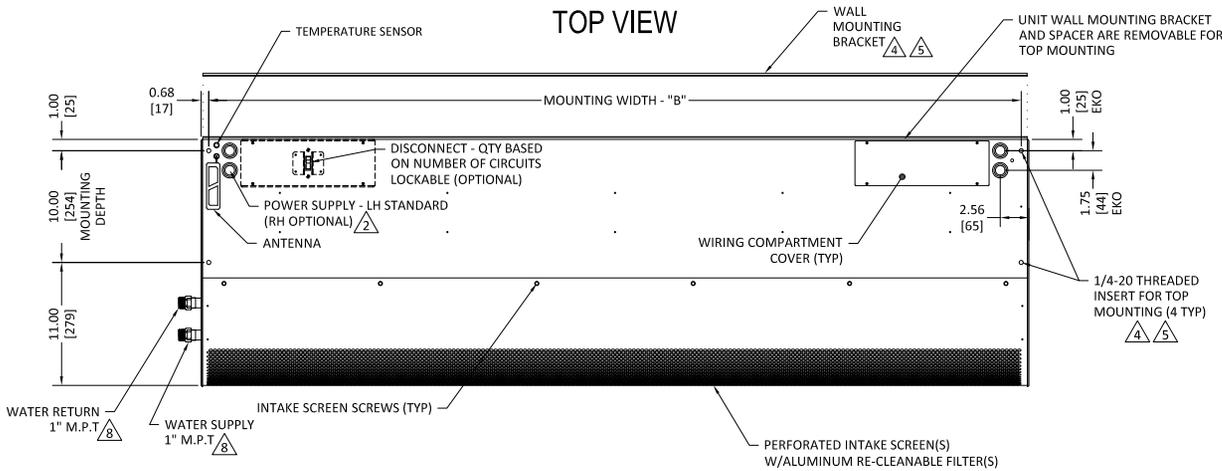

FRONT VIEW

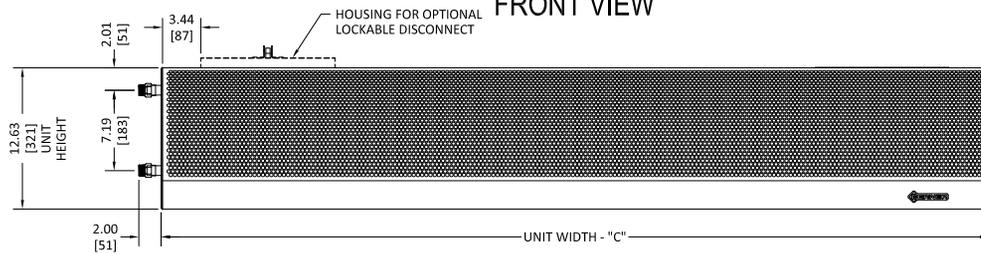


BOTTOM VIEW

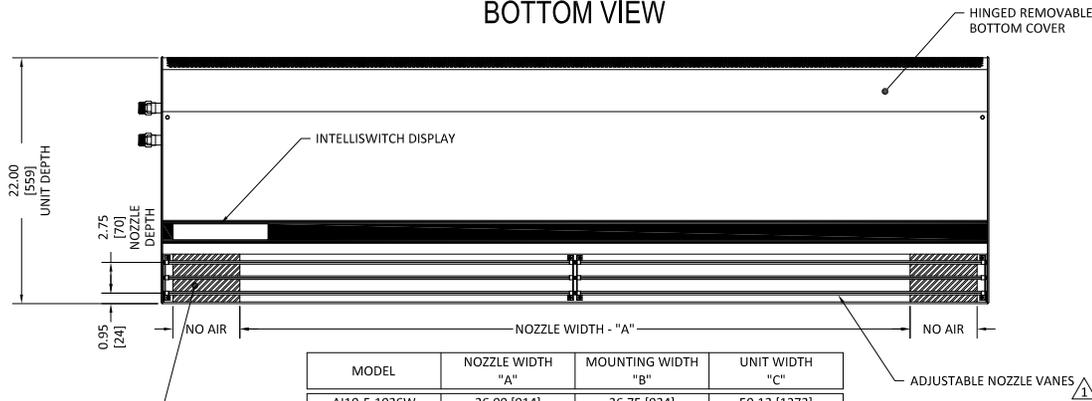

INACTIVE NOZZLE AREA FOR TRANSFORMER ENCLOSURE. CENTER ACTIVE NOZZLE WIDTH DIMENSION "A" OVER THE OPENING 9

MODEL	NOZZLE WIDTH "A"	MOUNTING WIDTH "B"	UNIT WIDTH "C"
AI10-F-1036W	36.00 [914]	36.75 [934]	50.13 [1273]
AI10-F-1042W	42.00 [1067]	42.75 [1086]	50.13 [1273]
AI10-F-1048W	48.00 [1219]	48.75 [1238]	61.13 [1553]
AI10-F-1060W	59.00 [1499]	59.75 [1518]	74.13 [1883]
AI10-F-2072W	72.00 [1829]	72.75 [1848]	86.13 [2188]
AI10-F-2078W	78.00 [1981]	78.75 [2000]	86.13 [2188]
AI10-F-2084W	84.00 [2134]	84.75 [2153]	98.13 [2492]
AI10-F-2096W	96.00 [2438]	96.75 [2458]	110.13 [2797]
AI10-F-2108W	108.00 [2743]	108.75 [2762]	120.13 [3051]
AI10-F-2120W	118.00 [2997]	118.75 [3016]	134.13 [3407]
AI10-F-3132W	132.00 [3353]	132.75 [3372]	146.13 [3712]
AI10-F-3144W	144.00 [3658]	144.75 [3677]	158.13 [4016]

END VIEW

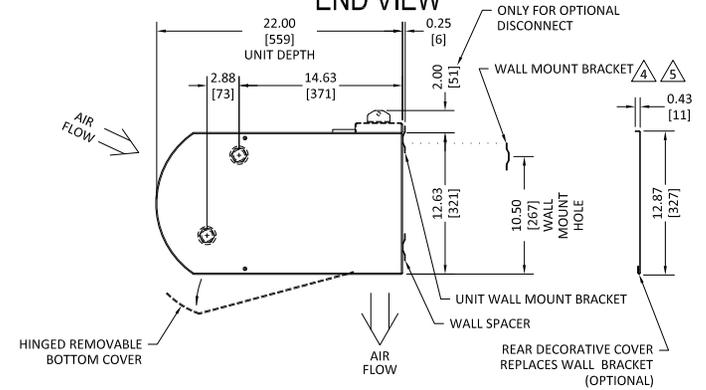

NOTES:

- 1 AIR CURTAIN MUST BE INSTALLED SO AIR STREAM IS NOT OBSTRUCTED WHEN DEFLECTED 20° TO EITHER SIDE OF C.
- 2 ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- 3 FIELD VERIFY DIMENSIONS.
- 4 ANCHORS TO SUPPORTING STRUCTURE BY OTHERS.
- 5 ADEQUACY OF SUPPORTING STRUCTURE IS TO BE VERIFIED BY A PROFESSIONAL STRUCTURAL ENGINEER.
- 6 THE LAST CHARACTER IN THE MODEL NUMBER - "W" DESIGNATES WATER HEATED UNIT.
- 7 DIMENSIONS IN INCHES [MILLIMETERS].
- 8 COIL CONNECTIONS LH STANDARD (AS SHOWN), OPTIONAL RH.
- 9 NO AIR FLOW, AREA HOUSES TRANSFORMER. CENTER ACTIVE NOZZLE WIDTH DIMENSION "A" OVER THE OPENING.

SHEET 1 OF 1

PROJECT	REV		1
LOCATION			
ARCHITECT			
ENGINEER			
DWG. NO.	AI10-F-WTR-600	TITLE:	BERNER
DATE	10JUL2025	MODEL AI10-F AIR CURTAIN 600V WATER HEATED SYSTEM	
BY	S. Beil		
REPLACES	24JAN2025		
BY	S. Beil	BERNER INTERNATIONAL CORP. NEW CASTLE, PA.	