


Vestibule Exception Compliance: up to 16 ft. AFF / Optimal Environmental Separation: up to 12 ft. AFF

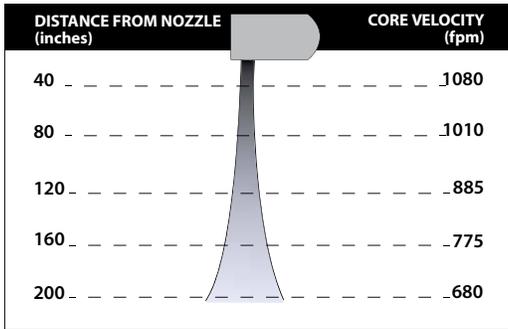

Berner International certifies that the air curtains shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. Rated data shown is for base (unheated) units. The AMCA Certified Ratings Seal applies to airflow rate, average outlet velocity, outlet velocity uniformity, velocity projection and power rating at free delivery only.

Model ARE12-1060A is not licensed to bear the AMCA seal.

5 Year Limited Warranty




MODEL	Nozzle Width (in)	Max Vel. at Nozzle (fpm)	Avg. Outlet Vel. (fpm)	Air Volume (cfm)	Outlet Vel. Uniformity	Power Rating (kW)	Motor(s) @ hp	Net Wt. (lbs)
ARE12-1036A	36.00	5,444	1,722	1,507	87%	0.46	1 @ 1/2	101
ARE12-1042A	42.00	4,828	1,549	1,581	85%	0.49	1 @ 1/2	108
ARE12-1048A	48.00	4,839	1,377	1,607	87%	0.51	1 @ 1/2	114
ARE12-1060A	66.00	4,828	1,027	1,647	83%	0.52	1 @ 1/2	134
ARE12-2060A	66.00	5,202	1,674	2,686	91%	0.92	2 @ 1/2	171
ARE12-2072A	72.00	5,444	1,722	3,014	87%	0.92	2 @ 1/2	182
ARE12-2078A	78.00	4,828	1,629	3,088	85%	0.95	2 @ 1/2	188
ARE12-2084A	84.00	4,828	1,549	3,162	85%	0.98	2 @ 1/2	194
ARE12-2096A	99.00	4,839	1,336	3,214	87%	1.02	2 @ 1/2	205
ARE12-3096A	99.00	5,202	1,743	4,193	87%	1.38	3 @ 1/2	245
ARE12-3108A	108.00	5,444	1,722	4,521	87%	1.38	3 @ 1/2	273
ARE12-3120A	117.00	4,828	1,642	4,669	85%	1.44	3 @ 1/2	285
ARE12-3132A	132.00	4,828	1,486	4,769	85%	1.49	3 @ 1/2	297
ARE12-3144A	144.00	4,839	1,377	4,821	87%	1.53	3 @ 1/2	308
ARE12-4144A	144.00	5,444	1,722	6,028	87%	1.84	4 @ 1/2	364

NOTE: Operation at 50 Hz will generate approximately a 17% reduction in air performance.
 Berner does not recommend ARE12-1060A, exists only as an equivalent to competitors' model.
 See sheet EP-240 for amp draws/total load requirements.

MODEL NUMBER CONFIGURATION

ARE12-1 036 A A -CB-D-R-SS

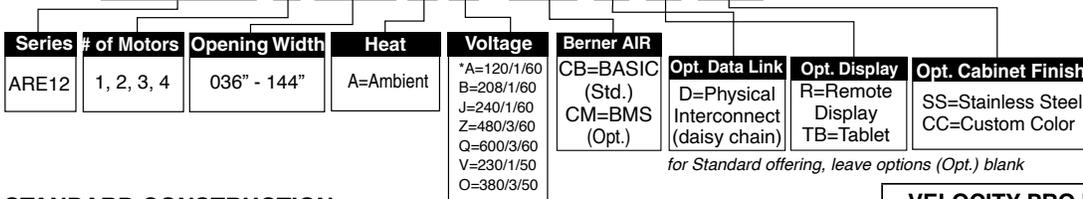

for Standard offering, leave options (Opt.) blank

STANDARD CONSTRUCTION

- 15" high x 26" deep
- ½ hp AC motor(s) - ten speeds
- Touchscreen interface with Intelliswitch™ digital controller, includes Berner AIR® BASIC (smart control)
- White aluminum bottom panel
- Top Mounting only
- High efficiency, low noise Pro-V Nozzle
- Filter (washable)

OPTIONS

- Berner AIR® BMS (smart control with BACnet and Modbus capabilities)
- Bottom panel finish: Custom Color or Stainless

*Suitable for 50hz

VELOCITY PROJECTION: Model ARE12-1036A					
Distance from Nozzle (in)	40	80	120	160	200
Core Velocity (fpm)	1080	1010	885	775	680
Uniformity (%)	88	89	90	92	92

ASHRAE 90.1-2019 vestibule exception requires, "a jet velocity of not less than 6.6 feet per second (400 fpm; 2.0 m/s) at 6.0 in (15 cm) above the floor."

Sound level measured 10' (3m) from the unit in free field:

- 1 motor: Min./Max. Speed: 59/62 dBA
- 2 motors: Min./Max. Speed: 62/65 dBA
- 3 motors: Min./Max. Speed: 64/67 dBA
- 4 motors: Min./Max. Speed: 65/68 dBA

Sound data is not AMCA certified.

Berner reserves the right to alter specifications without prior notice.



ARCHITECTURAL RECESSED 12 - AC MOTORS

Ambient (Unheated) Air Curtain Electrical Performance Sheet

MODEL	# CKTS	120/1/60 (voltage code A) AC MOTOR AMP DRAW = 8.5 each		# CKTS	208/1/60 (voltage code B) AC MOTOR AMP DRAW = 4.3 each		# CKTS	240/1/60 (voltage code J) or 230/1/50 (voltage code V) AC MOTOR AMP DRAW = 4.3 each	
		AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT		AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT		AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT
ARE12-1036A ARE12-1042A ARE12-1048A ARE12-1060A	1	8.5	15	1	4.3	15	1	4.3	15
ARE12-2060A ARE12-2072A ARE12-2078A ARE12-2084A ARE12-2096A	1	17.0	25	1	8.6	15	1	8.6	15
ARE12-3096A ARE12-3108A ARE12-3120A ARE12-3132A ARE12-3144A	1	25.5	35	1	12.9	20	1	12.9	20
ARE12-4144A	1	34.0	45	1	17.2	25	1	17.2	25

Berner reserves the right to alter specifications without prior notice.

Berner.com Berner Air Curtains 800.245.4455
111 Progress Ave. / New Castle / PA / 16101 / USA

EP-240
July, 2025

©Copyright, 2026 Berner Air Curtains



ARCHITECTURAL RECESSED 12 - AC MOTORS

Ambient (Unheated) Air Curtain
Electrical Performance Sheet


MODEL	# CKTS	480/3/60 (voltage code Z) XFMR 480/120 1 kVA per MTR @ 2.1 each AC MOTOR AMP DRAW= 8.5 each @ 120V		# CKTS	600/3/60 (voltage code Q) XFMR 600/120 1 kVA per MTR @ 1.7 each AC MOTOR AMP DRAW= 8.5 each @ 120V		# CKTS	380/3/50 (voltage code O) AC MOTOR AMP DRAW = 4.3 each	
		AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT		AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT		AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT
ARE12-1036A ARE12-1042A ARE12-1048A ARE12-1060A	1	2.1	15	1	1.7	15	1	4.3	15
ARE12-2060A ARE12-2072A ARE12-2078A ARE12-2084A ARE12-2096A	1	4.2	15	1	3.4	15	1	8.6	15
ARE12-3096A ARE12-3108A ARE12-3120A ARE12-3132A ARE12-3144A	1	6.3	15	1	5.1	15	1	12.9	20
ARE12-4144A	1	8.4	15	1	6.8	15	1	17.2	25

Berner reserves the right to alter specifications without prior notice.


ARE12

ARCHITECTURAL RECESSED AMBIENT SYSTEM


TOP VIEW

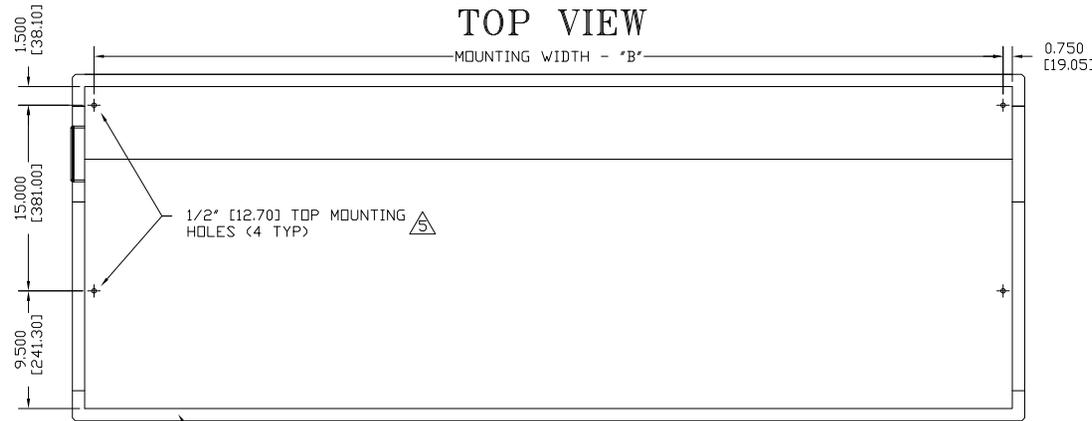


FRONT VIEW

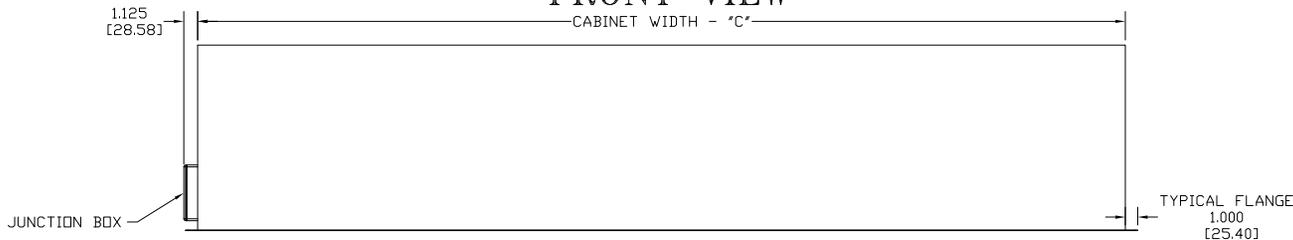

BOTTOM VIEW

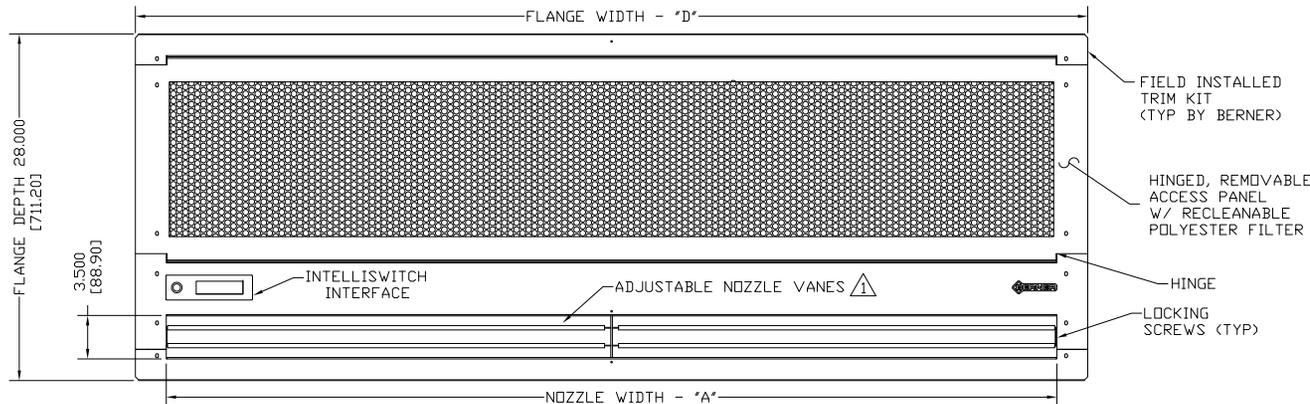

END VIEW

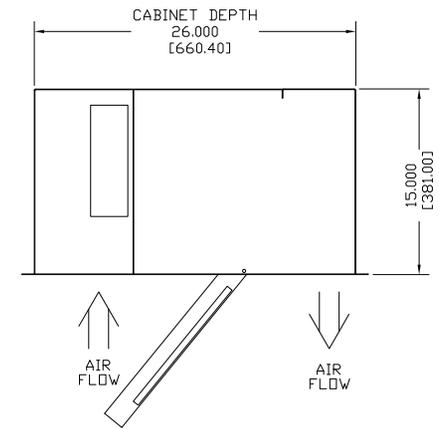

NOTES:

- ① AIR CURTAIN MUST BE INSTALLED SO AIR STREAM IS NOT OBSTRUCTED WHEN DEFLECTED 20° TO EITHER SIDE OF C.
- ② ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- ③ FIELD VERIFY DIMENSIONS.
- ④ ANCHORS TO SUPPORTING STRUCTURE BY OTHERS.
- ⑤ ADEQUACY OF SUPPORTING STRUCTURE IS TO BE VERIFIED BY A PROFESSIONAL STRUCTURAL ENGINEER.
- ⑥ LETTER "A" IN MODEL NUMBER DESIGNATES AMBIENT UNIT.
- △ DIMENSIONS IN INCHES [MILLIMETERS].

MODEL △	NOZZLE WIDTH "A"	MOUNTING WIDTH "B"	CABINET WIDTH "C"	FLANGE WIDTH "D"	RECOMMENDED ROUGH OPENING DEPTH x WIDTH
ARE12-1036A	36.00 [914]	37.50 [953]	39.00 [991]	41.00 [1041]	27.00 x 40.00 [686 x 1016]
ARE12-1042A	42.00 [1067]	43.50 [1105]	45.00 [1143]	47.00 [1194]	27.00 x 46.00 [686 x 1168]
ARE12-1048A	48.00 [1219]	49.50 [1257]	51.00 [1295]	53.00 [1346]	27.00 x 52.00 [686 x 1321]
ARE12-1060A/2060A	66.00 [1676]	67.50 [1712]	69.00 [1753]	71.00 [1803]	27.00 x 70.00 [686 x 1778]
ARE12-2072A	72.00 [1829]	73.50 [1867]	75.00 [1905]	77.00 [1956]	27.00 x 76.00 [686 x 1930]
ARE12-2078A	78.00 [1981]	79.50 [2019]	81.00 [2057]	83.00 [2108]	27.00 x 82.00 [686 x 2083]
ARE12-2084A	84.00 [2133]	85.50 [2172]	87.00 [2210]	89.00 [2261]	27.00 x 88.00 [686 x 2235]
ARE12-2096A/3096A	99.00 [2515]	100.50 [2553]	102.00 [2591]	104.00 [2642]	27.00 x 103.00 [686 x 2616]
ARE12-3108A	108.00 [2743]	109.50 [2781]	111.00 [2819]	113.00 [2870]	27.00 x 112.00 [686 x 2845]
ARE12-3120A	117.00 [2972]	118.50 [3010]	120.00 [3048]	122.00 [3099]	27.00 x 121.00 [686 x 3073]
ARE12-3132A	132.00 [3353]	133.50 [3391]	135.00 [3429]	137.00 [3480]	27.00 x 136.00 [686 x 3454]
ARE12-3144A/4144A	144.00 [3658]	145.50 [3696]	147.00 [3734]	149.00 [3785]	27.00 x 148.00 [686 x 3759]

PROJECT		
LOCATION		
ARCHITECT		
ENGINEER		REV. B
DWG. NO.	ARE12-AMB	TITLE: BERNER
DATE	23JUN2025	MODEL ARE12 AIR CURTAIN AMBIENT SYSTEM
BY	S. Beil	
REPLACES	27MAY2025	
BY	S. Beil	BERNER INTERNATIONAL CORP. NEW CASTLE, PA.