When the doors are open, BERNER AIR CURTAINS®



AIR CURTAIN SERIES AI08 & AI10

Low-key, versatile & functional


An elegant refresh of Berner's classic air curtain shape

Made in U.S.A.



+1 724.658.3551 Berner.com

Saving energy and creating healthy, comfortable environments

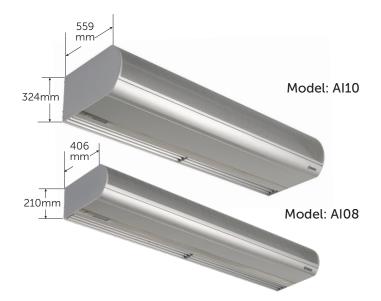

Standard Construction

Choose from ambient or hot water heat

- Touchscreen interface with Intelliswitch[™] digital controller, includes Berner AIR[®] BASIC (smart control)
- Cabinet: Clear satin anodized aluminum exterior (Optional: Custom Color or Stainless)
- Wall or Top Mounting
- High efficiency, low noise articulating Pro-V Nozzle
- Filter (washable)
- Parts Warranty: Five years

Architectural Icon 8:

- Single lengths up to 3050mm
- EC motor(s) ten speeds

Architectural Icon 10:

- Single lengths up to 3660mm
- EC motor(s) ten speeds



AMCA Certified, all heat options, and meets Building Codes:

ASHRAE 90.1-2019, ASHRAE 189.1, and IECC-2015, allow AMCA Certified Air Curtains as an exception to a vestibule.

Built on Berner's strong engineering foundation, these air curtains save energy and protect the interior when the door is open and can be used with or instead of a vestibule.



THE ARCHITECTURAL ICON 8 & 10

Keeping main entrance applications in mind, Berner's Architectural Air Curtains:

- Are quiet, technologically advanced, and beautifully designed
- Meet the vestibule exception in
 ASHRAE 90.1-2019 and other energy codes
- Save energy and support healthy, comfortable environments

Controls

THE ALL NEW BERNER INTELLISWITCH[™] and BERNER AIR[®] smart control & app

Built-in digital controller with touchscreen display

- Effortless & Flexible choose from pre-set modes, adjust the motor speed, create a schedule, adjust the time delay, and more.
- Space heater setting and thermostat probe (heated units only)
- Low voltage circuit for air curtain activation
- Follows best practices for cyber security protocols

Sold Separately:

BERNER AIR[®] BMS PACKAGE

- for Building Management Systems
- Allows full integration of the air curtain with the Building Management System via:
 - o BACnet-IP and BACnet-MS/TP
 - o Modbus-TCP and Modbus-RTU
- On-site, secure wi-fi connection required
- Activation device: Magnetic reed door switch
- Remote mounted Intelliswitch touchscreen display

Installation & Mounting

Simple to install, operate & maintain

- No Assembly Required
- Wall mounting brackets included
- M6 threaded inserts for top mounting
- Bottom access panel for easy access to internal components

