

When the doors are open, BERNER AIR CURTAINS®

**BERNER
INDUSTRIAL
DIRECT DRIVE 12 & 14**

AIR CURTAIN SERIES #IDC12 & IDC14

Durable, all-welded construction


Gray powder-coated exterior,
and mill aluminum inlet panel

Made in U.S.A.



+1 724.658.3551
Berner.com

Saving energy and creating healthy, comfortable environments

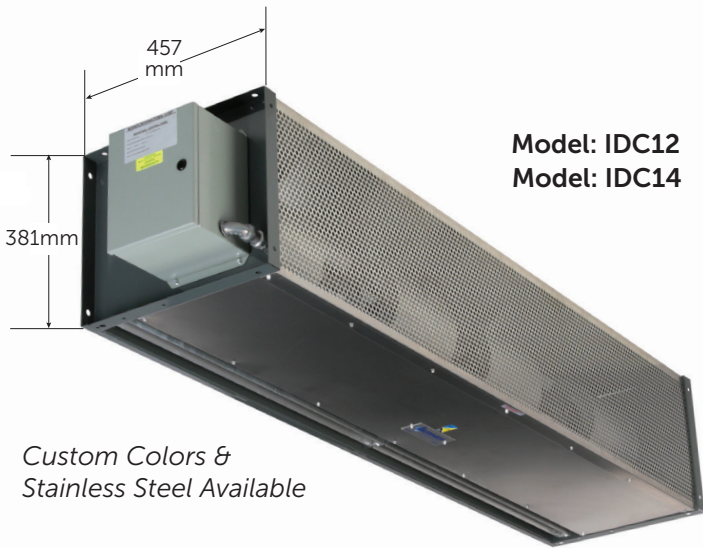

Model: IDC12
Model: IDC14

Custom Colors &
Stainless Steel Available

Standard Construction

Choose from ambient or hot water heat

- IDC12 - 0,37 kW single speed motor(s) - direct drive (Optional: three-speed)
- IDC14 - 0,74 kW single speed motor(s) - direct drive (Optional: two-speed)
- Touchscreen interface with Intelliswitch™ digital controller, includes Berner AIR® BASIC (smart control)
- Gray powder-coated exterior with mill aluminum screen and access panels (Optional: Custom Color or Stainless)
- Wall and top mounting
- Front air intake (Optional: top)
- High efficiency Pro-V Nozzle
- Parts Warranty: Five years



THE INDUSTRIAL DIRECT DRIVE 12 & 14

- Used to keep temperatures stable and flying insects out when the doors are open.
- Engineered to perform and built to last.
- Berner is a UL Listed panel shop.

FDA recommended, USDA compliant, and AMCA certified (unheated models).

Controls

THE ALL NEW BERNER INTELLISWITCH™ and BERNER AIR® smart control & app

Built-in digital controller with touchscreen display

- Effortless & Flexible - choose from pre-set modes, adjust the motor speed, create a schedule, adjust the time delay, and more.
- Space heater setting and thermostat probe (heated units only)
- Low voltage circuit for air curtain activation
- Follows best practices for cyber security protocols

Sold Separately:

• BERNER AIR® BMS PACKAGE

for Building Management Systems

- Allows full integration of the air curtain with the Building Management System via:

- o BACnet-IP and BACnet-MS/TP
- o Modbus-TCP and Modbus-RTU
- On-site, secure wi-fi connection required
- Activation device: Magnetic reed door switch
- Remote mounted Intelliswitch touchscreen display

Installation & Mounting

Simple to install, operate & maintain

- Single lengths up to 5m
- No Assembly Required
- Ø 13mm holes for wall or top mounting

Options:

- Mounting brackets available for horizontal and vertical mounting.
- Nozzle Extensions
- Tamper-resistant correctional package



www.Berner.com

111 Progress Avenue, New Castle, PA 16101

+1 724-658-3551

