



ARCHITECTURAL CONTOUR 8

Ambient (Unheated) Air Curtain

Data Sheet

Recommended for Mounting Heights to 8' (environmental separation) and 7' (insect control)

Vestibule Exception for the ASHRAE 90.1-2019, IECC 2018, and ASHRAE 189.1 Energy Codes, require a velocity projection tested in accordance with AMCA 220 of not less than 6.6 feet per second (400 fpm or 2.0 m/s) at 6.0 in (15 cm) above the floor.

VELOCITY PROJECTION: Model AC08-F-1036A

Distance from Nozzle (in)	40	80	120
Core Velocity (fpm)	874	766	576
Uniformity (%)	90%	88%	87%



Berner International certifies that the air curtains shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. Rated data shown is for base (unheated) units. The AMCA Certified Ratings Seal applies to airflow rate, average outlet velocity, outlet velocity uniformity, velocity projection and power rating at free delivery only.

5 Year
Limited
Warranty



indoor use



MODEL	Nozzle Width (in)	Max Vel. at Nozzle (fpm)	Avg. Outlet Vel. (fpm)	Air Volume (cfm)	Outlet Vel. Uniformity	Power Rating (kW)	Motor(s) @ hp	Net Wt. (lbs)
AC08-F-1036A	36.00	2,308	1,758	989	85%	0.21	1 @ 1/5	43
AC08-F-1042A	42.00	2,425	1,778	1,167	83%	0.24	1 @ 1/5	48
AC08-F-1048A	48.00	2,417	1,827	1,370	80%	0.26	1 @ 1/5	53
AC08-F-1060A	59.00	2,276	1,827	1,684	81%	0.33	1 @ 1/5	64
AC08-F-1072A	72.00	2,185	1,648	1,854	84%	0.35	1 @ 1/5	74
AC08-F-2078A	78.00	2,425	1,769	2,156	83%	0.44	2 @ 1/5	86
AC08-F-2084A	84.00	2,425	1,778	2,334	83%	0.47	2 @ 1/5	96
AC08-F-2096A	96.00	2,417	1,827	2,740	80%	0.53	2 @ 1/5	106
AC08-F-2108A	108.00	2,417	1,810	3,054	80%	0.60	2 @ 1/5	117
AC08-F-2120A	118.00	2,276	1,827	3,368	81%	0.67	2 @ 1/5	128

See sheets EP-260E-AC & EP-260E-EC for amp draws/total load requirements.

600/3/60 power supply includes transformer housing, See drawing AC08-F-AMB-600

NOTE: Operation of standard motor (AC) at 50Hz will generate a 17% reduction in performance; no reduction for optional EC motors.

MODEL NUMBER CONFIGURATION

AC08-F-1 036 A A-AC-CB-D-R-SS

Series	Version	# of Motors	Opening Width	Heat	Voltage	Motor Type	Berner AIR	Opt. Data Link	Opt. Display	Opt. Cabinet Finish
AC08	F	1, 2	036" - 120"	A=Ambient	AC & EC motors A = 120/1/60* B = 208/1/60 J = 240/1/60 V = 230/1/50 A-XI = 600/3/60 † W = 277/1/60	AC (Std.) EC (Opt.)	CB=BASIC (Std.) CM=BMS (Opt.)	Opt. Data Link D=Physical Interconnect (daisy chain)	Opt. Display R=Remote Display TB=Tablet	SS=Stainless Steel CC=Custom Color

STANDARD CONSTRUCTION

- 8 1/4" high x 20" deep
- 1/5 hp AC motor(s) - ten speeds
- Touchscreen interface with Intelliswitch™ digital controller, includes Berner AIR® BASIC (smart control)
- Clear satin anodized aluminum exterior
- Wall or Top Mounting
- High efficiency, low noise, articulating, three vane, Pro-V Nozzle
- Filter (washable)

OPTIONS

- 1/5 hp EC motor(s) - ten speeds
- Berner AIR® BMS (smart control with BACnet and Modbus capabilities)
- Custom Color or Stainless
- Rear cover for top mounting to conceal fasteners

for Standard offering, leave options (Opt.) blank

*Suitable for 50 Hz

† Add 5" to cabinet width for transformer

Sound level measured 10' (3m) from the unit in free field:

1 motor: Min./Max. Speed: 49/55 dBA

2 motors: Min./Max. Speed: 52/58 dBA

Sound data is not AMCA certified.

Berner reserves the right to alter specifications without prior notice.

www.berner.com Berner International 800.245.4455

111 Progress Ave. / New Castle / PA / 16101 / USA

DS-260E

July, 2025

©Copyright, 2025 Berner International



ARCHITECTURAL CONTOUR 8 - AC MOTORS

**Ambient (Unheated) Air Curtain
Electrical Performance Sheet**

120/1/60 (voltage code A) AC MOTOR AMP DRAW = 3.4 each				208/1/60 (voltage code B) AC MOTOR AMP DRAW = 1.7 each			240/1/60 (voltage code J) or 230/1/50 (voltage code V) AC MOTOR AMP DRAW = 1.7 each		
MODEL	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT
AC08-F-1036A AC08-F-1042A AC08-F-1048A AC08-F-1060A AC08-F-1072A	1	3.4	15	1	1.7	15	1	1.7	15
AC08-F-2078A AC08-F-2084A AC08-F-2096A AC08-F-2108A AC08-F-2120A	1	6.8	15	1	3.4	15	1	3.4	15

277/1/60 (voltage code W) AC MOTOR AMP DRAW = 2.3 each				600/3/60 (voltage code A-XI) XFMR 600/120 0.5kVA per MTR @ 0.8 each AC MOTOR AMP DRAW = 3.4 each @ 120V			
MODEL	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS
AC08-F-1036A AC08-F-1042A AC08-F-1048A AC08-F-1060A AC08-F-1072A	1	2.3	15	1	0.8	15	1
AC08-F-2078A AC08-F-2084A AC08-F-2096A AC08-F-2108A AC08-F-2120A	1	4.6	15	1	1.6	15	1

Berner reserves the right to alter specifications without prior notice.

www.berner.com Berner International 800.245.4455
111 Progress Ave. / New Castle / PA / 16101 / USA

EP-260E-AC
July, 2025

©Copyright, 2025 Berner International



ARCHITECTURAL CONTOUR 8 - EC MOTORS

**Ambient (Unheated) Air Curtain
Electrical Performance Sheet**

120/1/60 (voltage code A) EC MOTOR AMP DRAW = 4.4 each				208/1/60 (voltage code B) EC MOTOR AMP DRAW = 2.5 each			240/1/60 (voltage code J) or 230/1/50 (voltage code V) EC MOTOR AMP DRAW = 2.5 each		
MODEL	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT
AC08-F-1036A AC08-F-1042A AC08-F-1048A AC08-F-1060A AC08-F-1072A	1	4.4	15	1	2.5	15	1	2.5	15
AC08-F-2078A AC08-F-2084A AC08-F-2096A AC08-F-2108A AC08-F-2120A	1	8.8	15	1	5.0	15	1	5.0	15

277/1/60 (voltage code W) EC MOTOR AMP DRAW = 2.2 each				600/3/60 (voltage code A-XI) XFMR 600/120 0.5kVA per MTR @ 0.8 each EC MOTOR AMP DRAW = 4.4 each @ 120V		
MODEL	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT	BREAKER RATING PER CIRCUIT
AC08-F-1036A AC08-F-1042A AC08-F-1048A AC08-F-1060A AC08-F-1072A	1	2.2	15	1	0.8	15
AC08-F-2078A AC08-F-2084A AC08-F-2096A AC08-F-2108A AC08-F-2120A	1	4.4	15	1	1.7	15




Berner reserves the right to alter specifications without prior notice.

www.berner.com Berner International 800.245.4455
111 Progress Ave. / New Castle / PA / 16101 / USA



EP-260E-EC
July, 2025

©Copyright, 2025 Berner International

AC08-F AMBIENT [UNHEATED] SYSTEM: 120 - 277V

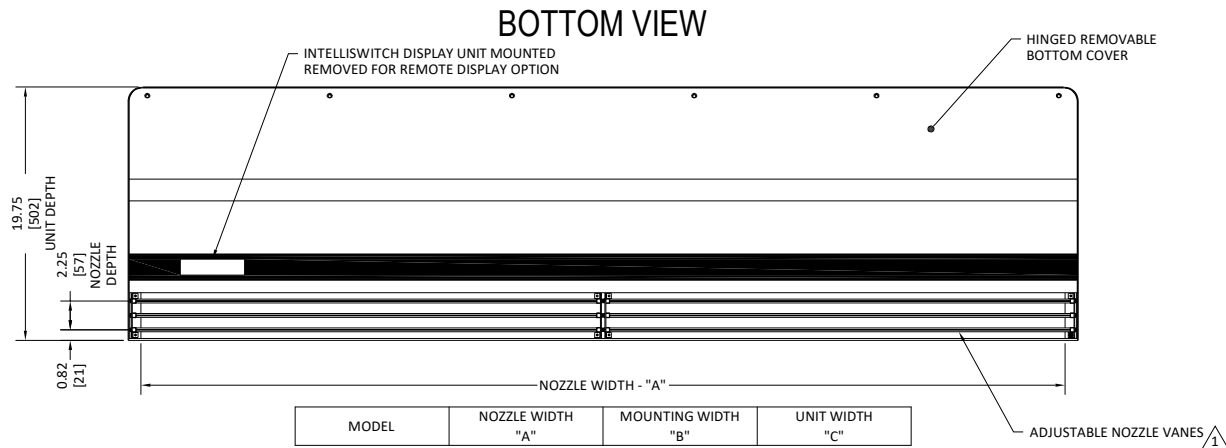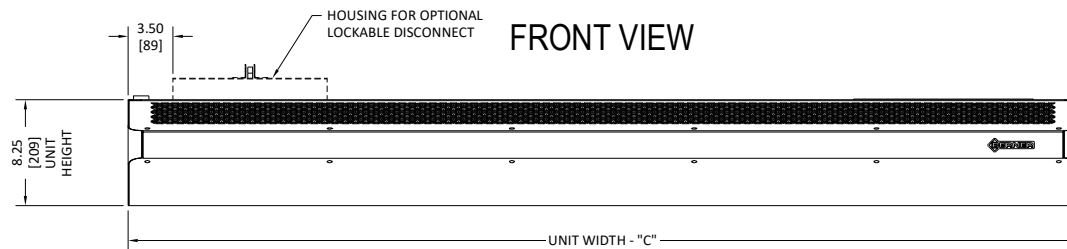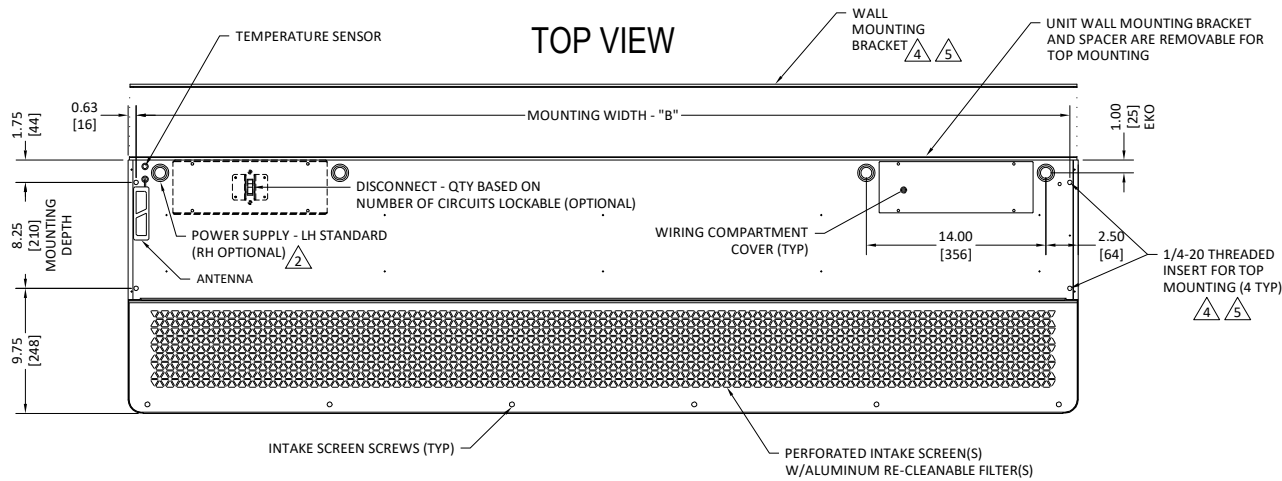

MODEL	NOZZLE WIDTH "A"	MOUNTING WIDTH "B"	UNIT WIDTH "C"
AC08-F-1036A	36.00 [914]	36.75 [934]	38.00 [965]
AC08-F-1042A	42.00 [1067]	42.75 [1086]	44.00 [1118]
AC08-F-1048A	48.00 [1219]	48.75 [1238]	50.00 [1270]
AC08-F-1060A	59.00 [1499]	59.75 [1518]	61.00 [1549]
AC08-F-1072A	72.00 [1829]	72.75 [1848]	74.00 [1880]
AC08-F-1078A	78.00 [1981]	78.75 [2000]	80.00 [2032]
AC08-F-2084A	84.00 [2134]	84.75 [2153]	86.00 [2184]
AC08-F-2096A	96.00 [2438]	96.75 [2458]	98.00 [2489]
AC08-F-2108A	108.00 [2743]	108.75 [2762]	110.00 [2794]
AC08-F-2120A	118.00 [2997]	118.75 [3016]	120.00 [3048]

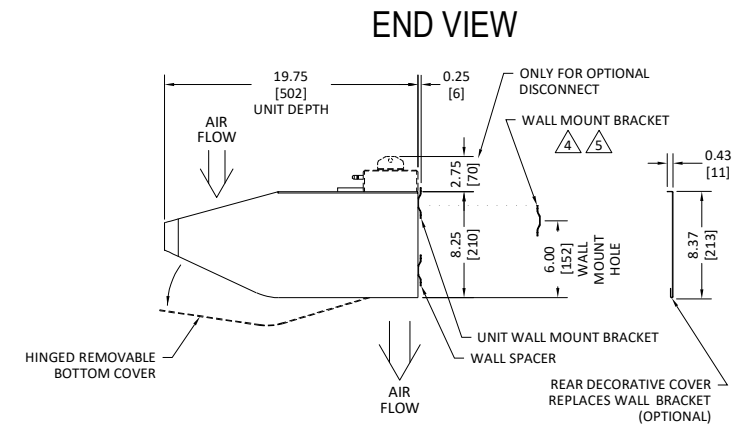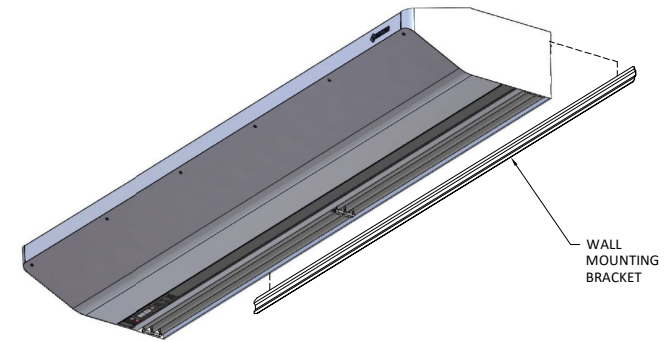






NOTES:

- AIR CURTAIN MUST BE INSTALLED SO AIR STREAM IS NOT OBSTRUCTED WHEN DEFLECTED 20° TO EITHER SIDE OF C.
- ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- FIELD VERIFY DIMENSIONS.
- ANCHORS TO SUPPORTING STRUCTURE BY OTHERS.
- ADEQUACY OF SUPPORTING STRUCTURE IS TO BE VERIFIED BY A PROFESSIONAL STRUCTURAL ENGINEER.
- THE LAST CHARACTER IN THE MODEL NUMBER - "A" DESIGNATES AMBIENT (UNHEATED) UNIT.
- DIMENSIONS IN INCHES [MILLIMETERS].

SHEET 1 OF 1

PROJECT		REV	0
LOCATION			
ARCHITECT			
ENGINEER			
DWG. NO.	AC08-F-AMB-120	TITLE:	BERNER
DATE	21JAN2025		MODEL AC08-F AIR CURTAIN 120 - 277V AMBIENT (UNHEATED) SYSTEM
BY	S. Beil		
REPLACES	28FEB2023		
BY	D. Johnson		BERNER INTERNATIONAL CORP. NEW CASTLE, PA.

AC08-F AMBIENT [UNHEATED] SYSTEM: 600V

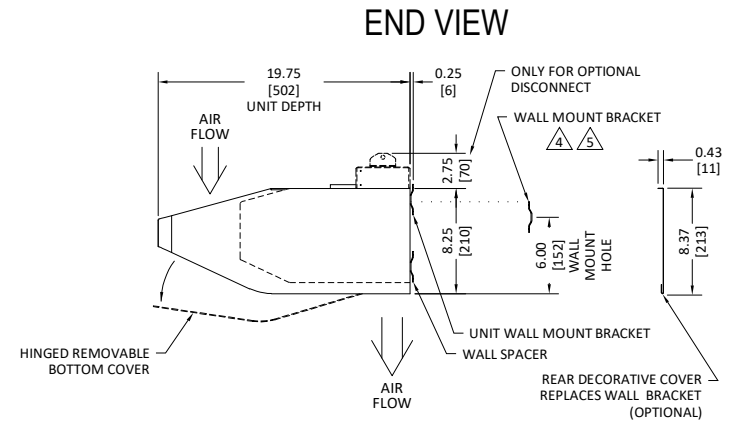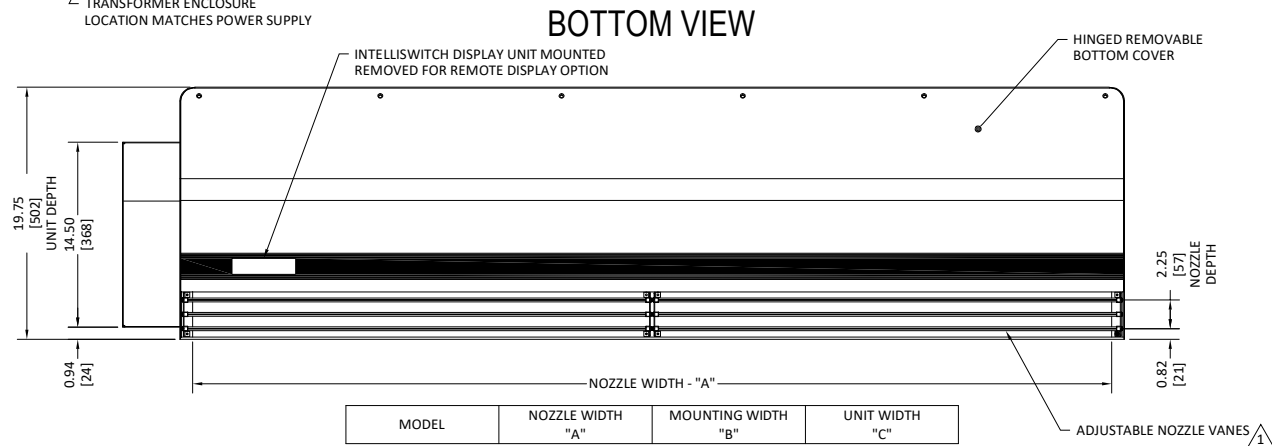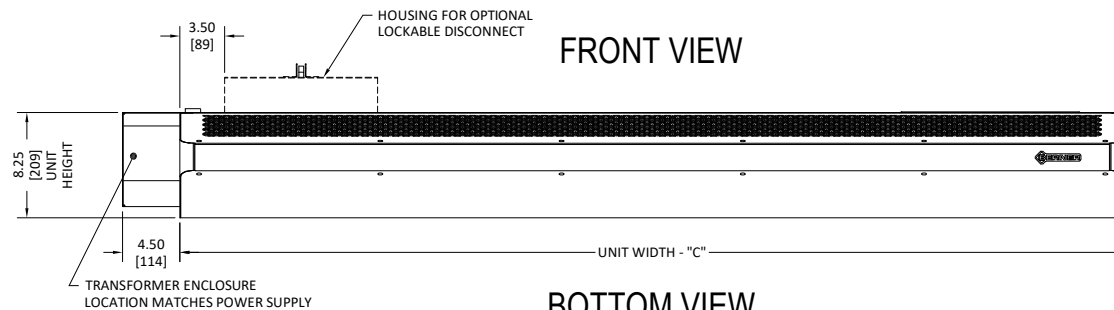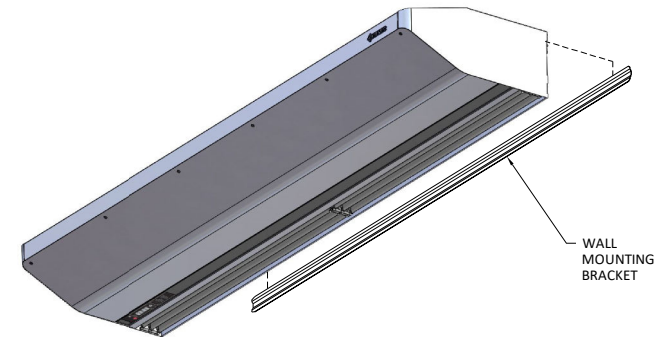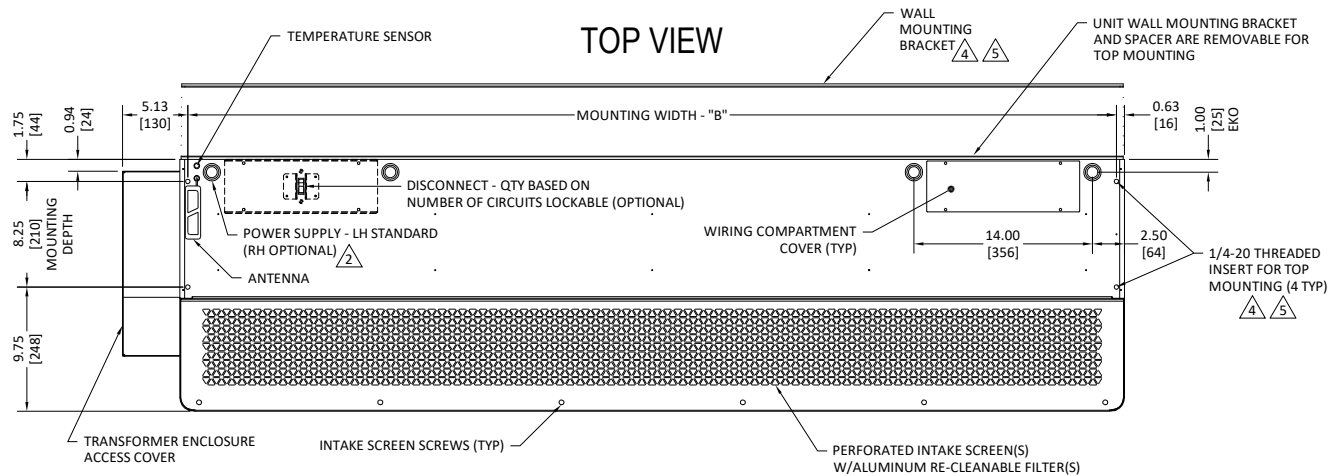

NOTES:

- 1 AIR CURTAIN MUST BE INSTALLED SO AIR STREAM IS NOT OBSTRUCTED WHEN DEFLECTED 20° TO EITHER SIDE OF C.
- 2 ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- 3 FIELD VERIFY DIMENSIONS.
- 4 ANCHORS TO SUPPORTING STRUCTURE BY OTHERS.
- 5 ADEQUACY OF SUPPORTING STRUCTURE IS TO BE VERIFIED BY A PROFESSIONAL STRUCTURAL ENGINEER.
- 6 THE LAST CHARACTER IN THE MODEL NUMBER - "A" DESIGNATES AMBIENT (UNHEATED) UNIT.
- 7 DIMENSIONS IN INCHES [MILLIMETERS].

SHEET 1 OF 1

MODEL	NOZZLE WIDTH "A"	MOUNTING WIDTH "B"	UNIT WIDTH "C"
AC08-F-1036A	36.00 [914]	36.75 [934]	38.00 [965]
AC08-F-1042A	42.00 [1067]	42.75 [1086]	44.00 [1118]
AC08-F-1048A	48.00 [1219]	48.75 [1238]	50.00 [1270]
AC08-F-1060A	59.00 [1499]	59.75 [1518]	61.00 [1549]
AC08-F-1072A	72.00 [1829]	72.75 [1848]	74.00 [1880]
AC08-F-1078A	78.00 [1981]	78.75 [2000]	80.00 [2032]
AC08-F-2084A	84.00 [2134]	84.75 [2153]	86.00 [2184]
AC08-F-2096A	96.00 [2438]	96.75 [2458]	98.00 [2489]
AC08-F-2108A	108.00 [2743]	108.75 [2762]	110.00 [2794]
AC08-F-2120A	118.00 [2997]	118.75 [3016]	120.00 [3048]

PROJECT		REV	0
LOCATION			
ARCHITECT			
ENGINEER			
DWG. NO.	AC08-F-AMB-600	TITLE:	BERNER
DATE	21JAN2025		MODEL AC08-F AIR CURTAIN 600V AMBIENT (UNHEATED) SYSTEM
BY	S. Beil		
REPLACES	28FEB2023		
BY	D. Johnson		BERNER INTERNATIONAL CORP. NEW CASTLE, PA.