

Recommended for Mounting Heights to 8' (environmental separation)

Vestibule Exception for the ASHRAE 90.1-2019, IECC 2018, and ASHRAE 189.1 Energy Codes, require a velocity projection tested in accordance with AMCA 220 of not less than 6.6 feet per second (400 fpm or 2.0 m/s) at 6.0 in (15 cm) above the floor.

VELOCITY PROJECTION: Model AE08-F-1036E

Distance from Nozzle (in)	40	80	120
Core Velocity (fpm)	970	710	605
Uniformity (%)	91%	89%	92%



2 Year Limited Warranty

Berner International certifies that the air curtains shown here-in are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. Rated data shown is for base (electric heated) units. The AMCA Certified Ratings Seal applies to airflow rate, average outlet velocity, outlet velocity uniformity, velocity projection and power rating at free delivery only.



indoor use



MODEL	Nozzle Width (in)	Max Vel. at Nozzle (fpm)	Avg. Outlet Vel. (fpm)	Air Volume (cfm)	Outlet Vel. Uniformity	Power Rating (kW)	Motor(s) @ hp	Max Electric Capacity (kW)	Heater Output (MBH)	Air Temp. Rise (°F)	Net Wt. (lbs)
AE08-F-1036E	36.00	2,251	1,691	951	84%	0.20	1 @ 1/5	10.0	34.1	33°	57
AE08-F-1042E	42.00	2,317	1,728	1,134	83%	0.23	1 @ 1/5	10.0	34.1	28°	64
AE08-F-1048E	48.00	2,335	1,779	1,334	81%	0.26	1 @ 1/5	14.4	49.1	34°	71
AE08-F-1060E	59.00	2,189	1,808	1,667	81%	0.32	1 @ 1/5	14.4	49.1	27°	86
AE08-F-1072E	72.00	2,149	1,582	1,780	84%	0.32	1 @ 1/5	20.0	68.3	35°	100
AE08-F-2078E	78.00	2,317	1,711	2,085	83%	0.42	2 @ 1/5	20.0	68.3	30°	127
AE08-F-2084E	84.00	2,317	1,728	2,268	83%	0.45	2 @ 1/5	20.0	68.3	28°	127
AE08-F-2096E	96.00	2,335	1,779	2,668	81%	0.52	2 @ 1/5	28.8	98.3	34°	142
AE08-F-2108E	108.00	2,335	1,778	3,001	81%	0.58	2 @ 1/5	28.8	98.3	30°	156
AE08-F-2120E	118.00	2,189	1,808	3,334	81%	0.64	2 @ 1/5	28.8	98.3	27°	167

See sheet EP-222E for amp draws/total load requirements and alternate kW.
600/3/60 power supply includes extended cabinet, See drawing AE08-F-ELE-TR.
NOTE: Single Point Power Connection – consult factory.

MODEL NUMBER CONFIGURATION

AE08-F-1 036 E B-100-EC-CM -D-R-SA

Series	Version	# of Motors	Opening Width	Heat	Voltage	kW	Motor Type	Berner AIR	Opt. Interconnect	Opt. Display	Material / Finish	
AE08	F	1, 2	036" - 120"	E=Electric Heated	B=208/1/60" J=240/1/60" V=230/1/50" W=277/1/60" K=120/480 L=120/600 S=208/480 M=208/600 U=240/480 N=240/600 X=208/3/60 Y=240/3/60 WZ = 480/3/60** L-XI = 600/3/60† O = 380/3/50**	10.0 - 28.8 (100 - 288)	EC Motor	CM=BMS	D=Physical Data Link (daisy chain)	R=Remote Display TB=Tablet	Cabinet	Bottom Panel
						See sheet EP-222E for alternate kW code					S=Stainless (std) A= Anod Alum C=Custom Color	A=Anod Alum (std) S=Stainless C=Custom Color

for Standard offering, leave options (Opt.) blank

STANDARD CONSTRUCTION

- 11" high x 23" deep
- 1/5 hp EC motor(s)
- Touchscreen interface with Intelliswitch™ digital controller, includes Berner AIR® BMS (smart control and BACnet & Modbus)
- Cabinet: Brushed stainless steel, grade 304 (Optional: Anodized aluminum or Custom Color)
- Bottom Panel: Clear satin anodized aluminum (Optional: Custom Color or Stainless Steel)
- Wall or Top Mounting
- High efficiency, low noise, articulating Pro-V Nozzle
- Single stage electric heater (open element)
- Filter (washable)

Options

- Alternate kW: see sheet EP-222E
- Custom Color or Stainless
- Rear cover for top mounting to conceal fasteners

Sound level measured 10' (3m) from the unit in free field:
1 motor: Min./Max. Speed: 50/53 dBA
2 motors: Min./Max. Speed: 53/56 dBA

Sound data is not AMCA certified.

Berner reserves the right to alter specifications without prior notice.



ARCHITECTURAL ELITE 8 - EC MOTORS

Electric Air Curtain

Electrical Performance Sheet

MODEL	kW (code)	Temp Rise °F	208/1/60 (voltage code B) EC MOTOR AMP DRAW = 2.5 each			240/1/60 (voltage code J) or 230/1/50 (voltage code V) EC MOTOR AMP DRAW = 2.5 each			277/1/60 (voltage code W) EC MOTOR AMP DRAW = 2.2 each		
			# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT
AE08-F-1036E AE08-F-1042E	10 (100)	30	1	50.6	60	1	44.2	60	1	38.3	50
	7.5 (075)	23	1	38.6	50	1	33.8	45	1	29.3	40
	5.6 (056)	17	1	29.4	40	1	25.8	35	1	22.4	30
	4 (040)	12	1	21.7	30	1	19.2	25	1	16.6	25
AE08-F-1048E AE08-F-1060E	14.4 (144)	33	2	37.1/34.6	50/45	2	32.5/30.0	45/40	2	28.2/26.0	40/35
	10.8 (108)	25	2	28.5/26.0	40/35	1	47.5	60	1	41.2	60
	8.1 (081)	18	1	41.4	60	1	36.3	50	1	31.4	40
	5.6 (056)	13	1	29.4	40	1	25.8	35	1	22.4	30
AE08-F-1072E	20 (200)	30	-	N/A	N/A	2	44.2/41.7	60/60	2	38.3/36.1	50/50
	15 (150)	23	2	38.6/36.1	50/50	2	33.8/31.3	45/40	2	29.3/27.1	40/35
	11.2 (112)	17	2	29.4/26.9	40/35	1	49.2	60	1	42.6	60
	8 (080)	12	1	41.0	60	1	35.8	45	1	31.1	40
AE08-F-2078E AE08-F-2084E	20 (200)	26	-	N/A	N/A	-	N/A	N/A	2	40.5/36.1	60/50
	15 (150)	20	2	41.1/36.1	60/50	2	36.3/31.3	45/40	2	31.5/27.1	40/35
	11.2 (112)	15	2	31.9/26.9	40/35	2	28.3/23.3	35/30	1	44.8	60
	8 (080)	10	1	43.5	60	1	38.3	50	1	33.3	45
AE08-F-2096E AE08-F-2108E AE08-F-2120E	28.8 (288)	33	-	N/A	N/A	-	N/A	N/A	-	N/A	N/A
	21.6 (216)	25	-	N/A	N/A	-	N/A	N/A	2	43.4/39.0	60/50
	16.2 (162)	19	2	43.9/38.9	60/50	2	38.8/33.8	50/45	2	33.6/29.2	45/40
	11.2 (112)	13	2	31.9/26.9	40/35	2	28.3/23.3	35/30	1	44.8	60

Berner reserves the right to alter specifications without prior notice.

www.berner.com **Berner International** 800.245.4455
111 Progress Ave. / New Castle / PA / 16101 / USA

EP-222E
July, 2025

©Copyright, 2025 Berner International



ARCHITECTURAL ELITE 8 - EC MOTORS

Electric Air Curtain

Electrical Performance Sheet

			208/3/60 (voltage code X) EC MOTOR AMP DRAW = 2.5 each			240/3/60 (voltage code Y) EC MOTOR AMP DRAW = 2.5 each			480/3/60 (voltage code WZ) - 4 Wire System EC MOTOR AMP DRAW = 2.2 each @ 277V			600/3/60 (voltage code L-XI) XFMR 600/120 0.5kVA per MTR @ 0.8 each EC MOTOR AMP DRAW = 4.4 each @ 120V		
MODEL	kW (code)	Temp Rise °F	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT	# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT
AE08-F-1036E AE08-F-1042E	10 (100)	30	1	30.3	40	1	26.6	35	1	14.2	20	1	10.4	15
	7.5 (075)	23	1	23.3	30	1	20.5	30	1	11.2	15	1	8.0	15
	5.6 (056)	17	1	18.0	25	1	16.0	20	1	8.9	15	1	6.2	15
	4 (040)	12	1	13.6	20	1	12.1	20	1	7.0	15	1	4.6	15
AE08-F-1048E AE08-F-1060E	14.4 (144)	33	1	42.5	60	1	37.1	50	1	19.5	25	1	14.7	20
	10.8 (108)	25	1	32.5	45	1	28.5	40	1	15.2	20	1	11.2	15
	8.1 (081)	18	1	25.0	35	1	22.0	30	1	11.9	15	1	8.6	15
	5.6 (056)	13	1	18.0	25	1	16.0	20	1	8.9	15	1	6.2	15
AE08-F-1072E	20 (200)	30	2	30.3/27.8	40/35	2	26.6/24.1	35/35	1	26.3	35	1	20.0	30
	15 (150)	23	1	44.1	60	1	38.6	50	1	20.2	30	1	15.2	20
	11.2 (112)	17	1	33.6	45	1	29.4	40	1	15.7	20	1	11.6	15
	8 (080)	12	1	24.7	35	1	21.7	30	1	11.8	15	1	8.5	15
AE08-F-2078E AE08-F-2084E	20 (200)	26	2	32.8/27.8	45/35	2	29.1/24.1	40/35	1	28.5	40	1	20.8	30
	15 (150)	20	1	46.6	60	1	41.1	60	1	22.4	30	1	16.0	20
	11.2 (112)	15	1	36.1	45	1	31.9	40	1	17.9	25	1	12.4	20
	8 (080)	10	1	27.2	35	1	24.2	30	1	14.0	20	1	9.3	15
AE08-F-2096E AE08-F-2108E AE08-F-2120E	28.8 (288)	33	2	45.0/40.0	60/50	2	39.6/34.6	50/45	1	39.0	50	1	29.3	40
	21.6 (216)	25	2	35.0/30.0	45/40	2	31.0/26.0	40/35	1	30.4	40	1	22.4	30
	16.2 (162)	19	1	50.0	60	1	44.0	60	1	23.9	30	1	17.2	25
	11.2 (112)	13	1	36.1	45	1	31.9	40	1	17.9	25	1	12.4	20

Berner reserves the right to alter specifications without prior notice.

www.berner.com Berner International 800.245.4455
111 Progress Ave. / New Castle / PA / 16101 / USA

EP-222E
July, 2025



ARCHITECTURAL ELITE 8 - EC MOTORS

Electric Air Curtain

Electrical Performance Sheet

			120/1/60 - 480/3/60 (voltage code K) 120V EC MOTOR AMP DRAW = 4.4 each					208/1/60 - 480/3/60 (voltage code S) 208V EC MOTOR AMP DRAW = 2.5 each					240/1/60 - 480/3/60 (voltage code U) 240V EC MOTOR AMP DRAW = 2.5 each					380/3/50 (voltage code O) 4 Wire System EC MOTOR AMP DRAW = 2.5 each		
MODEL	kW (code)	Temp Rise °F	# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT (including motor)	BREAKER RATING PER CIRCUIT
				120V/1	480V/3	120V/1	480V/3		208V/1	480V/3	208V/1	480V/3		240V/1	480V/3	240V/1	480V/3			
AE08-F-1036E AE08-F-1042E	10 (100)	30	2	4.4	12.0	15	15	2	2.5	12.0	15	15	2	2.5	12.0	15	15	1	17.7	25
	7.5 (075)	23	2	4.4	9.0	15	15	2	2.5	9.0	15	15	2	2.5	9.0	15	15	1	13.9	20
	5.6 (056)	17	2	4.4	6.7	15	15	2	2.5	6.7	15	15	2	2.5	6.7	15	15	1	11.0	15
	4 (040)	12	2	4.4	4.8	15	15	2	2.5	4.8	15	15	2	2.5	4.8	15	15	1	8.6	15
AE08-F-1048E AE08-F-1060E	14.4 (144)	33	2	4.4	17.3	15	25	2	2.5	17.3	15	25	2	2.5	17.3	15	25	1	24.4	35
	10.8 (108)	25	2	4.4	13.0	15	20	2	2.5	13.0	15	20	2	2.5	13.0	15	20	1	18.9	25
	8.1 (081)	18	2	4.4	9.7	15	15	2	2.5	9.7	15	15	2	2.5	9.7	15	15	1	14.8	20
	5.6 (056)	13	2	4.4	6.7	15	15	2	2.5	6.7	15	15	2	2.5	6.7	15	15	1	11.0	15
AE08-F-1072E	20 (200)	30	2	4.4	24.1	15	35	2	2.5	24.1	15	35	2	2.5	24.1	15	35	1	32.9	45
	15 (150)	23	2	4.4	18.0	15	25	2	2.5	18.0	15	25	2	2.5	18.0	15	25	1	25.3	35
	11.2 (112)	17	2	4.4	13.5	15	20	2	2.5	13.5	15	20	2	2.5	13.5	15	20	1	19.5	25
	8 (080)	12	2	4.4	9.6	15	15	2	2.5	9.6	15	15	2	2.5	9.6	15	15	1	14.7	20
AE08-F-2078E AE08-F-2084E	20 (200)	26	2	8.8	24.1	15	35	2	5.0	24.1	15	35	2	5.0	24.1	15	35	1	35.4	45
	15 (150)	20	2	8.8	18.0	15	25	2	5.0	18.0	15	25	2	5.0	18.0	15	25	1	27.8	35
	11.2 (112)	15	2	8.8	13.5	15	20	2	5.0	13.5	15	20	2	5.0	13.5	15	20	1	22.0	30
	8 (080)	10	2	8.8	9.6	15	15	2	5.0	9.6	15	15	2	5.0	9.6	15	15	1	17.2	25
AE08-F-2096E AE08-F-2108E AE08-F-2120E	28.8 (288)	33	2	8.8	34.6	15	45	2	5.0	34.6	15	45	2	5.0	34.6	15	45	1	48.8	60
	21.6 (216)	25	2	8.8	26.0	15	35	2	5.0	26.0	15	35	2	5.0	26.0	15	35	1	37.8	50
	16.2 (162)	19	2	8.8	19.5	15	25	2	5.0	19.5	15	25	2	5.0	19.5	15	25	1	29.6	40
	11.2 (112)	13	2	8.8	13.5	15	20	2	5.0	13.5	15	20	2	5.0	13.5	15	20	1	22.0	30

Berner reserves the right to alter specifications without prior notice.

www.berner.com **Berner International** 800.245.4455
111 Progress Ave. / New Castle / PA / 16101 / USA

EP-222E
July, 2025



ARCHITECTURAL ELITE 8 - EC MOTORS

Electric Air Curtain

Electrical Performance Sheet

			120/1/60 - 600/3/60 (voltage code L) 120V EC MOTOR AMP DRAW = 4.4 each					208/1/60 - 600/3/60 (voltage code M) 208V EC MOTOR AMP DRAW = 2.5 each					240/1/60 - 600/3/60 (voltage code N) 240V EC MOTOR AMP DRAW = 2.5 each				
MODEL	kW (code)	Temp Rise °F	# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT		# CKTS	AMPS PER CIRCUIT		BREAKER RATING PER CIRCUIT	
				120V/1	600V/3	120V/1	600V/3		208V/1	600V/3	208V/1	600V/3		240V/1	600V/3	240V/1	600V/3
AE08-F-1036E AE08-F-1042E	10 (100)	30	2	4.4	9.6	15	15	2	2.5	9.6	15	15	2	2.5	9.6	15	15
	7.5 (075)	23	2	4.4	7.2	15	15	2	2.5	7.2	15	15	2	2.5	7.2	15	15
	5.6 (056)	17	2	4.4	5.4	15	15	2	2.5	5.4	15	15	2	2.5	5.4	15	15
	4 (040)	12	2	4.4	3.8	15	15	2	2.5	3.8	15	15	2	2.5	3.8	15	15
AE08-F-1048E AE08-F-1060E	14.4 (144)	33	2	4.4	13.9	15	20	2	2.5	13.9	15	20	2	2.5	13.9	15	20
	10.8 (108)	25	2	4.4	10.4	15	15	2	2.5	10.4	15	15	2	2.5	10.4	15	15
	8.1 (081)	18	2	4.4	7.8	15	15	2	2.5	7.8	15	15	2	2.5	7.8	15	15
	5.6 (056)	13	2	4.4	5.4	15	15	2	2.5	5.4	15	15	2	2.5	5.4	15	15
AE08-F-1072E	20 (200)	30	2	4.4	19.2	15	25	2	2.5	19.2	15	25	2	2.5	19.2	15	25
	15 (150)	23	2	4.4	14.4	15	20	2	2.5	14.4	15	20	2	2.5	14.4	15	20
	11.2 (112)	17	2	4.4	10.8	15	15	2	2.5	10.8	15	15	2	2.5	10.8	15	15
	8 (080)	12	2	4.4	7.7	15	15	2	2.5	7.7	15	15	2	2.5	7.7	15	15
AE08-F-2078E AE08-F-2084E	20 (200)	26	2	8.8	19.2	15	25	2	5.0	19.2	15	25	2	5.0	19.2	15	25
	15 (150)	20	2	8.8	14.4	15	20	2	5.0	14.4	15	20	2	5.0	14.4	15	20
	11.2 (112)	15	2	8.8	10.8	15	15	2	5.0	10.8	15	15	2	5.0	10.8	15	15
	8 (080)	10	2	8.8	7.7	15	15	2	5.0	7.7	15	15	2	5.0	7.7	15	15
AE08-F-2096E AE08-F-2108E AE08-F-2120E	28.8 (288)	33	2	8.8	27.7	15	35	2	5.0	27.7	15	35	2	5.0	27.7	15	35
	21.6 (216)	25	2	8.8	20.8	15	30	2	5.0	20.8	15	30	2	5.0	20.8	15	30
	16.2 (162)	19	2	8.8	15.6	15	20	2	5.0	15.6	15	20	2	5.0	15.6	15	20
	11.2 (112)	13	2	8.8	10.8	15	15	2	5.0	10.8	15	15	2	5.0	10.8	15	15





Berner reserves the right to alter specifications without prior notice.

www.berner.com Berner International 800.245.4455
111 Progress Ave. / New Castle / PA / 16101 / USA


EP-222E
July, 2025

©Copyright, 2025 Berner International

AE08-F ELEC HEATED SYSTEM: 208 - 480V & DUAL VOLTAGES

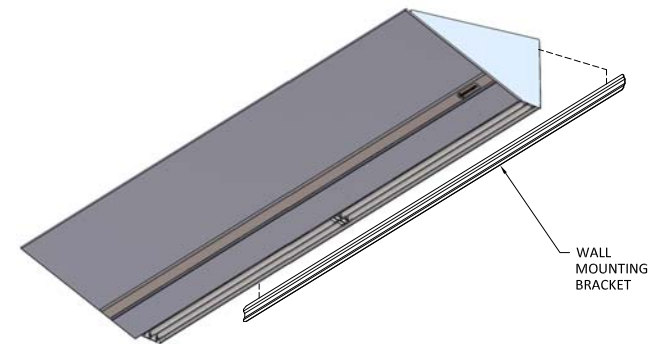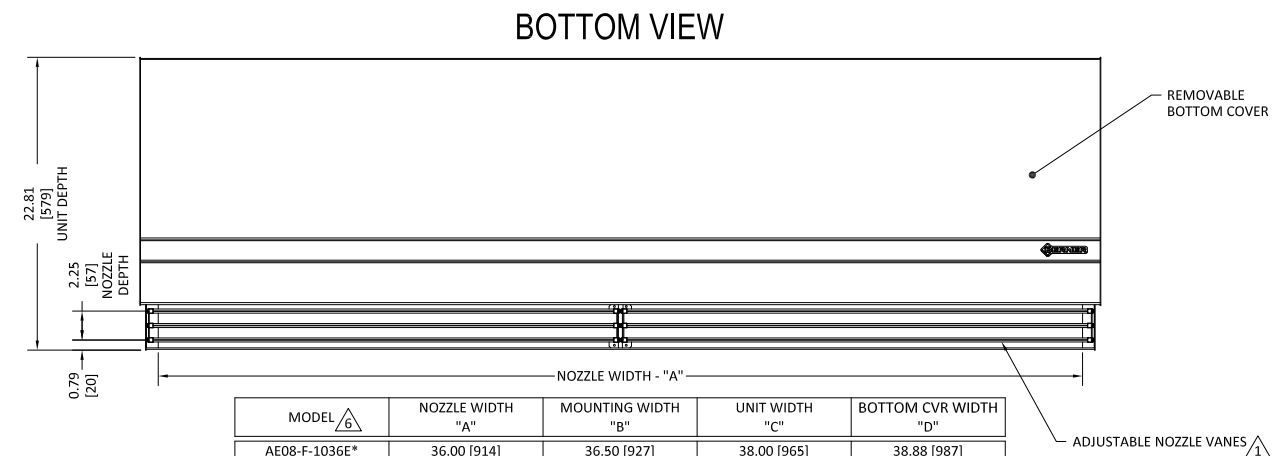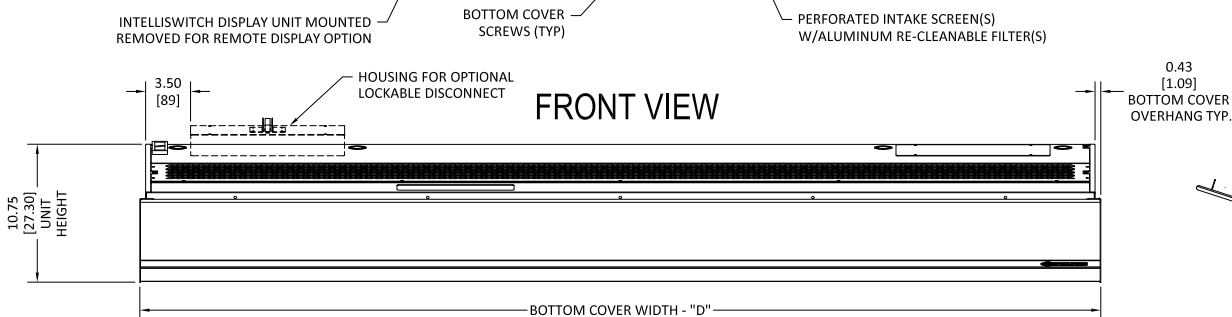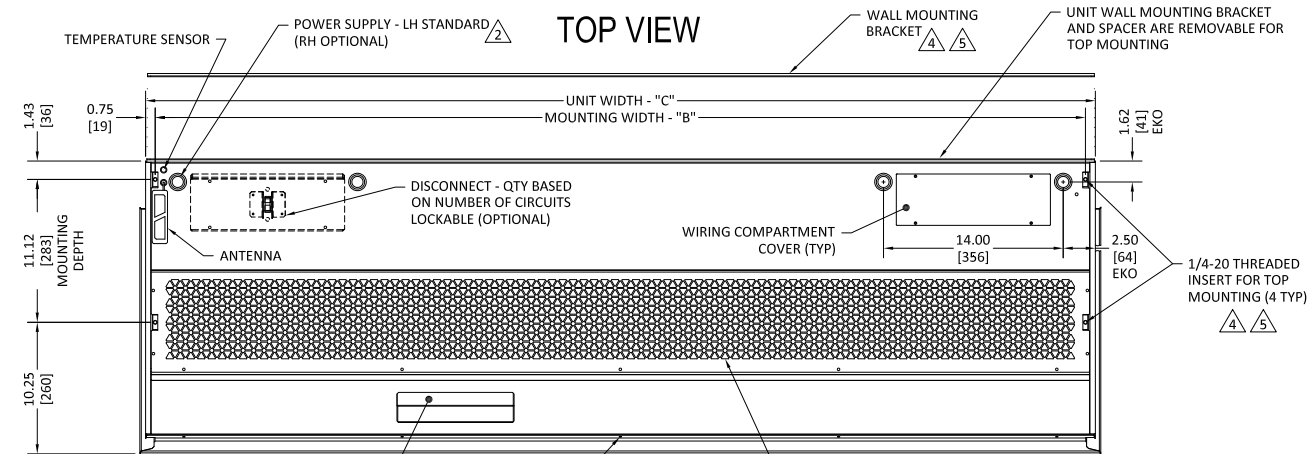

END VIEW

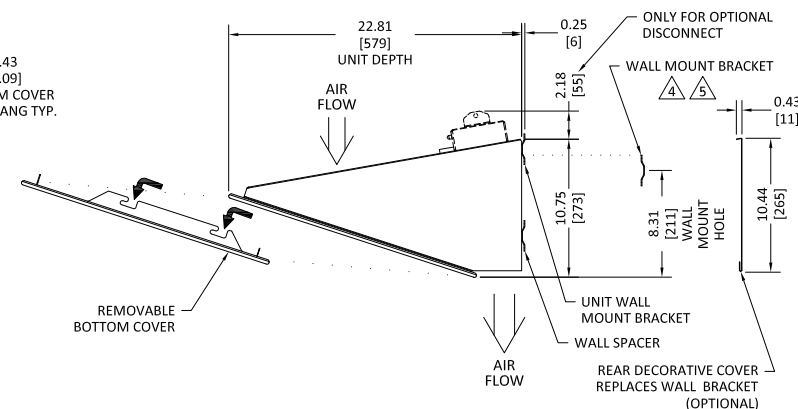

NOTES:

- AIR CURTAIN MUST BE INSTALLED SO AIR STREAM IS NOT OBSTRUCTED WHEN DEFLECTED 20° TO EITHER SIDE OF C.
- ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- FIELD VERIFY DIMENSIONS.
- ANCHORS TO SUPPORTING STRUCTURE BY OTHERS.
- ADEQUACY OF SUPPORTING STRUCTURE IS TO BE VERIFIED BY A PROFESSIONAL STRUCTURAL ENGINEER.
- THE 12th CHARACTER IN THE MODEL NUMBER - "E" DESIGNATES ELECTRIC (HEATED) UNIT.
- DIMENSIONS IN INCHES [MILLIMETERS].

*VOLTAGE CODES






B = 208/1/60
J = 240/1/60
V = 230/1/50
K = 120/480
L = 120/600
S = 208/480
M = 208/600
U = 240/480
N = 240/600
X = 208/3/60
Y = 240/3/60
O = 380/3/50
W = 277/1/60
WZ = 480/3/60

MODEL	NOZZLE WIDTH "A"	MOUNTING WIDTH "B"	UNIT WIDTH "C"	BOTTOM CVR WIDTH "D"
AE08-F-1036E*	36.00 [914]	36.50 [927]	38.00 [965]	38.88 [987]
AE08-F-1042E*	42.00 [1067]	42.50 [1080]	44.00 [1118]	44.88 [1140]
AE08-F-1048E*	48.00 [1219]	48.50 [1232]	50.00 [1270]	50.88 [1292]
AE08-F-1060E*	59.00 [1499]	59.50 [1511]	61.00 [1549]	61.88 [1572]
AE08-F-1072E*	72.00 [1829]	72.50 [1842]	74.00 [1880]	74.88 [1902]
AE08-F-2078E*	78.00 [1981]	78.50 [1994]	80.00 [2032]	80.88 [2054]
AE08-F-2084E*	84.00 [2134]	84.50 [2146]	86.00 [2184]	86.88 [2207]
AE08-F-2096E*	96.00 [2438]	96.50 [2451]	98.00 [2489]	98.88 [2512]
AE08-F-2108E*	108.00 [2743]	108.50 [2756]	110.00 [2794]	110.88 [2816]
AE08-F-2120E*	118.00 [2997]	118.50 [3010]	120.00 [3048]	120.88 [3070]

SHEET 1 OF 1

PROJECT		REV	1
LOCATION			
ARCHITECT			
ENGINEER			
DWG. NO.	AE08-F-ELE-208	TITLE:	BERNER
DATE	11APR2025		MODEL AE08-F AIR CURTAIN 208 - 480V ELECTRIC HEATED SYSTEM
BY	D. Johnson		
REPLACES	11NOV2024		
BY	D. Johnson		BERNER INTERNATIONAL CORP. NEW CASTLE, PA.

AE08-F ELECTRIC HEATED SYSTEM: 600V

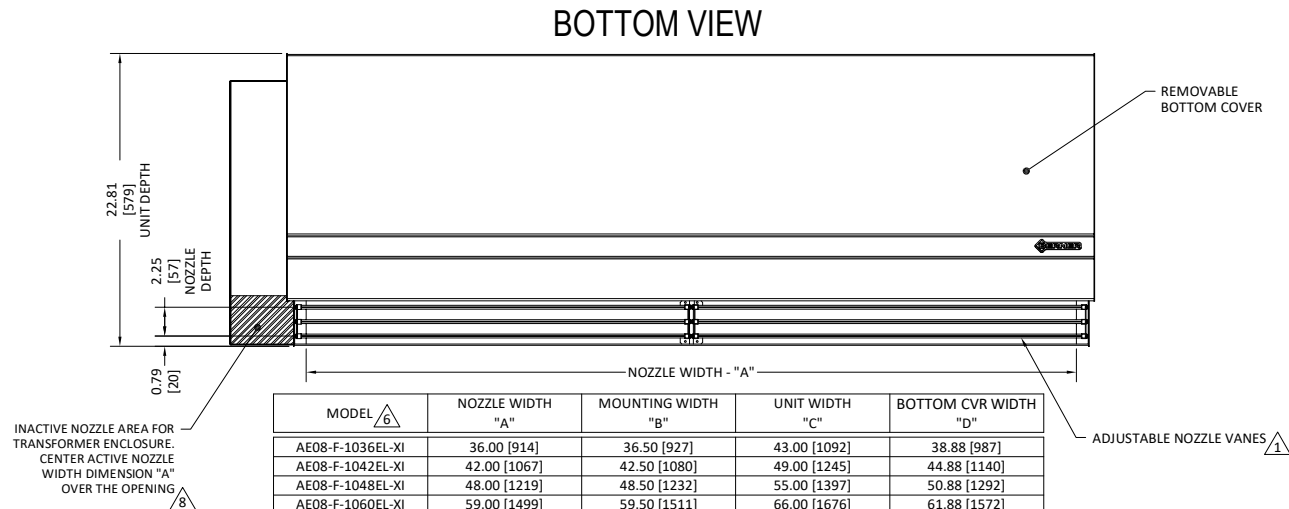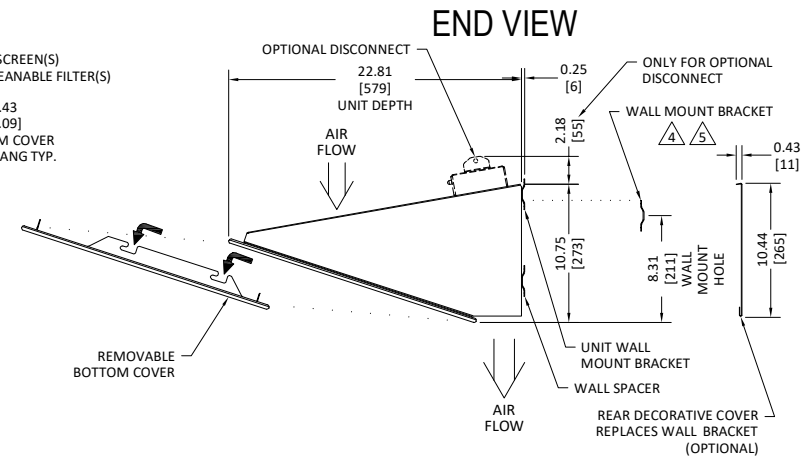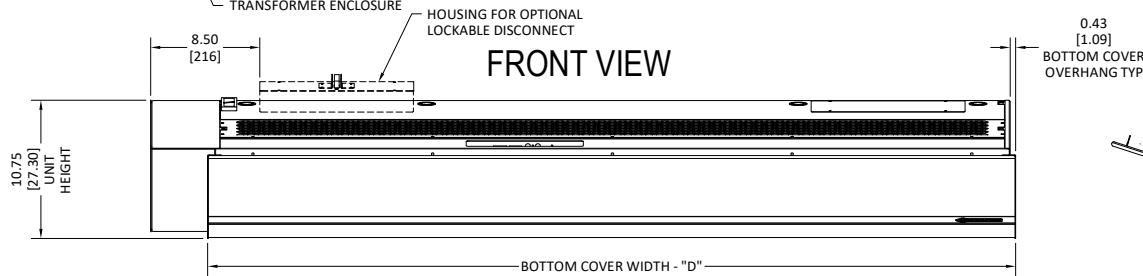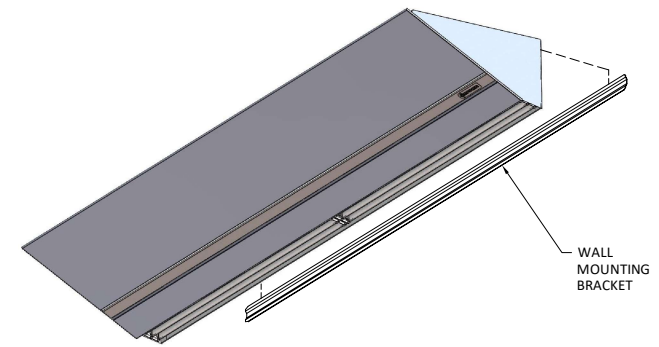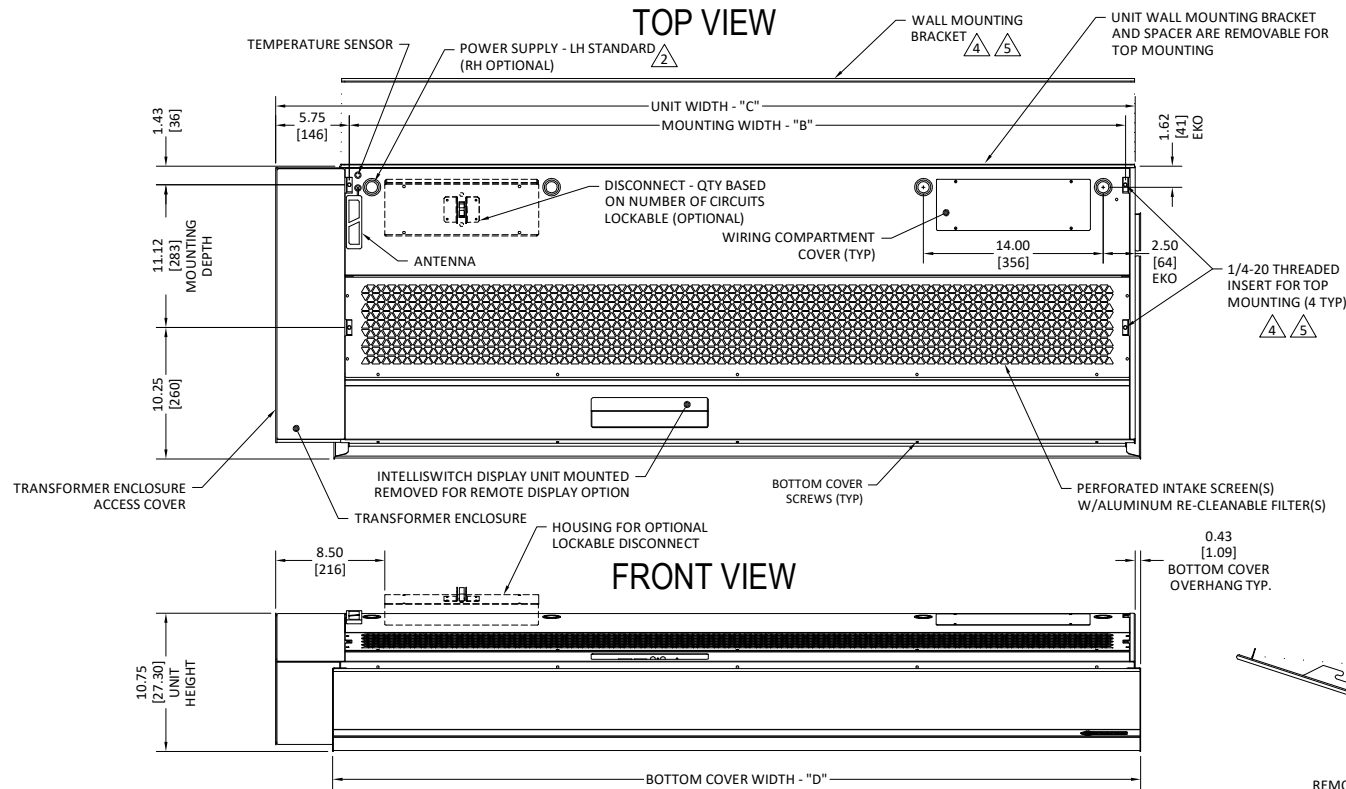

MODEL	NOZZLE WIDTH "A"	MOUNTING WIDTH "B"	UNIT WIDTH "C"	BOTTOM CVR WIDTH "D"
AE08-F-1036EL-XI	36.00 [914]	36.50 [927]	43.00 [1092]	38.88 [987]
AE08-F-1042EL-XI	42.00 [1067]	42.50 [1080]	49.00 [1245]	44.88 [1140]
AE08-F-1048EL-XI	48.00 [1219]	48.50 [1232]	55.00 [1397]	50.88 [1292]
AE08-F-1060EL-XI	59.00 [1499]	59.50 [1511]	66.00 [1676]	61.88 [1572]
AE08-F-1072EL-XI	72.00 [1829]	72.50 [1842]	79.00 [2007]	74.88 [1902]
AE08-F-2078EL-XI	78.00 [1981]	78.50 [1994]	85.00 [2159]	80.88 [2054]
AE08-F-2084EL-XI	84.00 [2134]	84.50 [2146]	91.00 [2311]	86.88 [2207]
AE08-F-2096EL-XI	96.00 [2438]	96.50 [2451]	103.00 [2616]	98.88 [2512]
AE08-F-2108EL-XI	108.00 [2743]	108.50 [2756]	115.00 [2921]	110.88 [2816]
AE08-F-2120EL-XI	118.00 [2997]	118.50 [3010]	125.00 [3175]	120.88 [3070]

NOTES:

- AIR CURTAIN MUST BE INSTALLED SO AIR STREAM IS NOT OBSTRUCTED WHEN DEFLECTED 20° TO EITHER SIDE OF C.
- ELECTRICAL CONNECTIONS TO BE FLEXIBLE.
- FIELD VERIFY DIMENSIONS.
- ANCHORS TO SUPPORTING STRUCTURE BY OTHERS.
- ADEQUACY OF SUPPORTING STRUCTURE IS TO BE VERIFIED BY A PROFESSIONAL STRUCTURAL ENGINEER.
- THE 12th CHARACTER IN THE MODEL NUMBER - "E" DESIGNATES ELECTRIC (HEATED) UNIT.
- DIMENSIONS IN INCHES [MILLIMETERS].
- NO AIR FLOW AREA HOUSES TRANSFORMER. CENTER ACTIVE NOZZLE WIDTH DIMENSION "A" OVER THE OPENING.

SHEET 1 OF 1

PROJECT		REV	0
LOCATION			
ARCHITECT			
ENGINEER			
DWG. NO.	AE08-F-ELE-600	TITLE:	BERNER
DATE	11NOV2024		MODEL AE08-F AIR CURTAIN 600V ELECTRIC HEATED SYSTEM
BY	D. Johnson		
REPLACES	-		
BY	-		BERNER INTERNATIONAL CORP. NEW CASTLE, PA.