
When the doors are open, BERNER AIR CURTAINS®





800-245-4455 Berner.com

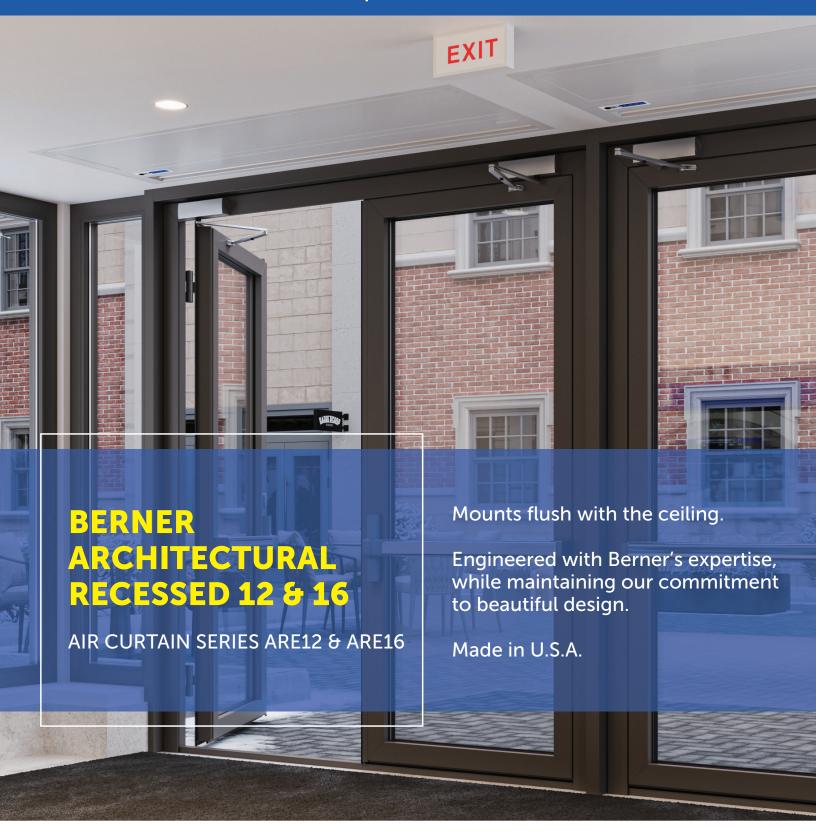

Bottom panel finish Custom Colors & Stainless Steel Available Requires a minimum of 15" clearance above the ceiling

Standard Construction

Choose from ambient, electric, steam or hot water heat

- 15" high x 26" deep
- Intelliswitch™ digital controller, includes Berner AIR® BASIC (smart control)
- White aluminum exterior panel
- Top mounting only
- High efficiency, low noise articulating Pro-V Nozzle
- Filter (washable)
- Parts Warranty:
 Ambient Five years; Heated Two years

Architectural Recessed 12:

- Single lengths up to 12'
- 1/2 hp motor(s) ten speeds

Architectural Recessed 16:

- Single lengths up to 12'
- 1 hp motor(s) two speeds



AMCA Certified, all heat options, and meets Building Codes:

ASHRAE 90.1-2019, ASHRAE 189.1, and IECC-2015, allow AMCA Certified Air Curtains as an exception to a vestibule.

Built on Berner's strong engineering foundation, these air curtains save energy and protect the interior when the door is open and can be used with or instead of a vestibule.









THE ARCHITECTURAL RECESSED 12 & 16

Keeping main entrance applications in mind, Berner's Architectural Air Curtains:

- Are quiet, technologically advanced, and beautifully designed
- Meet the vestibule exception in ASHRAE 90.1-2019 and other energy codes
- Save energy and support healthy, comfortable environments

Controls

THE ALL NEW BERNER INTELLISWITCH™ and BERNER AIR® smart control & app

Built-in digital controller with touchscreen display

- Effortless & Flexible choose from pre-set modes, adjust the motor speed, create a schedule, adjust the time delay, and more.
- Space heater setting and thermostat probe (heated units only)
- Low voltage circuit for air curtain activation
- On-site, secure wi-fi connection recommended
- Activation device: Magnetic reed door switch
- Optional: Remote mounted Intelliswitch touchscreen display
- Follows best practices for cyber security protocols

Sold Separately:

BERNER AIR® BMS PACKAGE

for Building Management Systems

- Allows full integration of the air curtain with the Building Management System via:
 - o BACnet-IP and BACnet-MS/TP
 - o Modbus-TCP and Modbus-RTU

Installation & Mounting

Simple to install, operate & maintain

- Single lengths up to 12'
- No Assembly Required
- 5/16" threaded inserts for top mounting
- Hinged bottom panel for easy access to internal components

www.Berner.com

Made in USA

111 Progress Avenue, New Castle, PA 16101 800-245-4455 724-658-3551